


规格书 | 型号: 2006-404

梳状跨接器; 绝缘; 4插脚; 额定电流41A; 浅灰色

[www.wago.com/2006-404](http://www.wago.com/2006-404)

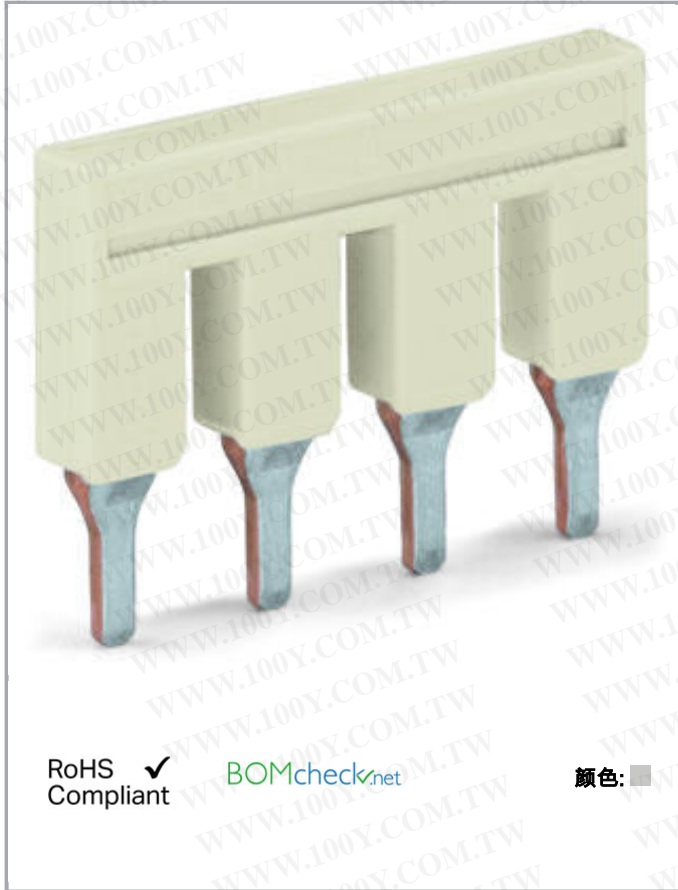

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

RoHS  Compliant

[BOMcheck.net](http://BOMcheck.net)

颜色: ■

## 数据

### 电气参数

#### Ratings per IEC/EN 60664-1

额定电压 (III / 3)	800 V
额定电流	41 A

#### Approvals Ex

额定电流 (Ex e II)	33 A
----------------	------



## Geometrical Data

宽度	27.8 mm / 1.094 inch
高度	19 mm / 0.748 inch
高度	4.1 mm / 0.161 inch

## 材料参数

颜色	浅灰色
燃烧负荷	0.018 MJ
重量	4.3 g

## 商业数据

Product Group	22 (TOPJOB S)
包装类型	bag
Country of origin	DE
GTIN	4055143701419
Customs Tariff No.	85366990990

## 下载

### Documentation

#### Additional Information

Technical explanations	2019/4/3	pdf	下载
		2.1 MB	

## CAD/CAE-Data

### CAD data

2D/3D Models 2006-404	URL	下载
-----------------------	-----	----


### CAE data

EPLAN Data Portal 2006-404		下载
----------------------------	--	----

WSCAD Universe 2006-404		下载
-------------------------	--	----

## Installation Notes

### Jumpered

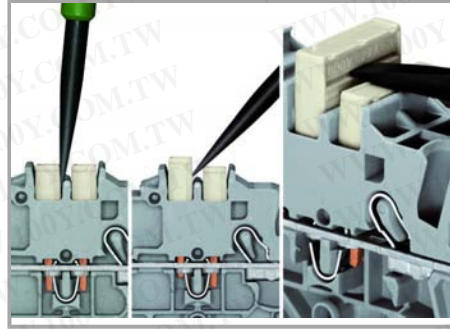

The push-in type jumper bar system is based on the common plug and socket principle. Each terminal block is spring-loaded with a double socket and a resilient CrNi steel spring. The jumper contact material is pure electrolytic copper, which allows for an extremely small design capable of carrying the full-rated current of the terminal block. Ground terminal blocks can also be commoned using the same jumper system. Custom jumpers are created by breaking and removing jumper contacts (2000, 2001, 2002, 2004 Series).

### Removing a push-in type jumper bar.

Insert the operating tool between the jumper and the partition wall of the dual jumper slots, then lift up the jumper.

Place the operating tool in the center of jumpers up to five contacts (see above), or alternately on both sides for jumpers with more than five contacts.

### Jumpered




Custom push-in type jumper bars are created by breaking off jumper contacts.

Marking a push-in type jumper bar using a felt-tip pen.

500 V

300 V

**Jumpered**

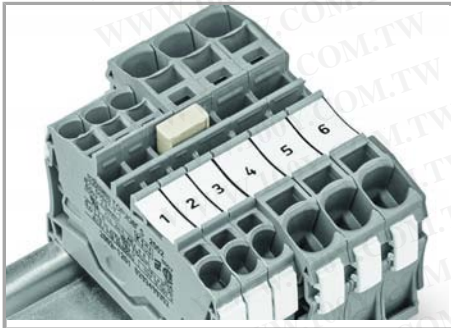

Stepping down via push-in type jumper bar.




Stepping down via push-in type jumper bar.



Stepping down via push-in type jumper bar.

Commoning via closed terminal side with end plate allows jumpering over two cross-section sizes, e.g., from 16 mm<sup>2</sup> (6 AWG) to 6 mm<sup>2</sup> (10 AWG) or from 6 mm<sup>2</sup> (10 AWG) to 2.5 mm<sup>2</sup> (14 AWG) (see illustration above).

Commoning via open terminal side with end plate allows jumpering over two cross-section sizes for 16 mm<sup>2</sup> (6 AWG) and 10 mm<sup>2</sup> (8 AWG) and one cross-section size for 6/4/2.5 mm<sup>2</sup> (10/12/14 AWG). An example: from 16 mm<sup>2</sup> (6 AWG) to 6 mm<sup>2</sup> (10 AWG) (see illustration above) or from 10 mm<sup>2</sup> (8 AWG) to 4 mm<sup>2</sup> (12 AWG).

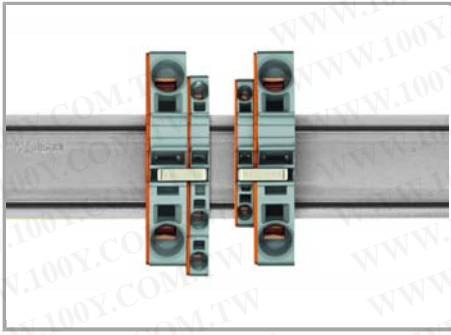

**Note:**

The total current of the outgoing circuits shall not exceed the nominal current of the step-down jumper/push-in type jumper bar.

**产品系列**

**TOPJOB® S**

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[显示该系列的所有产品。](#)

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)