

PIR-607 雙胞胎感應器



產品功能:

- 全國唯一有高溫及高負載斷電專利，防止坎燈內高負載或溫度過高，而造成危險，降溫後，即可恢復功能。
- 機體為防火材質，耐高溫，抗強光及回溯。
- 有日間光控感應器，照度在 30LUX 以上不感應。
- 雙頭感應器獨立作業不會互相干擾。
- 安裝位置為全方位，解決市面上所以感應不到的死角。
- 使用 40W 燈泡及 23W 省電燈及 LED 燈。
- 適用場合：樓梯，玄關，走道，門口，陽台等。

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

產品規格:

Model No.	PIR-607 Downlight Dual Lamp Sensor
Power Supply	AC110/240V 50/60HZ
Max. Load	Incandescent lamp: 60W, energy saving lamp : 23W and LED
Power Consumption	standby: <1.3 W
Sensing Angle	R&L:<130°, UP&DOWN:<90° (at 25°C)
Sensing Distance	25°C<8m
Illumination	Under 3LUX: sensor is active, over 30LUX: sensor not active
Off Delay time	1 : 10 sec. (night), 2 : 90 sec. (night), 3 : 330 sec. (night)
Warm-up Procedure	Install at daytime: the lamp will flash 3 times after energized. Install at nighttime: the lamp will light for about 20 seconds then automatically shut off after energized.
Dimension	5.6x5x7cm
Weight	110g
Wiring	Rotating socket (Screw-in Pin)


Instructions(Three adjustable knobs provided as described below):

1. Turn off the power and take off original screw bulb and into PIR-607. Finally, install them into the lamp holder and pull the sensor line to adjust the sensing angle.
2. Install at daytime: the lamp will flash 3 times after energized. Install at nighttime: the lamp will light for about 20 seconds then automatically shut off after energize.
3. After installation , Under 3LUX: sensor is active, over 30LUX: sensor not active
4. Off delay time:



1 : 10 sec. (night), 2 : 90 sec. (night), 3 : 330 sec. (night)

Sensing Range and Distance:

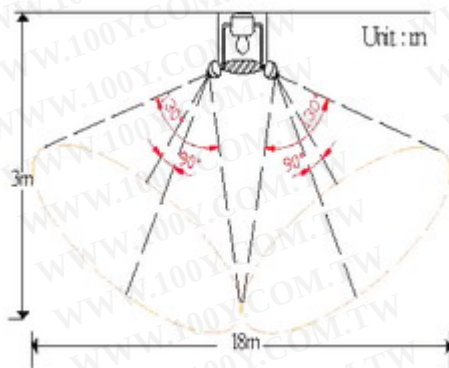

Application place:



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

