

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)




### RH2-425-2/40U


AC Source :	99~305V	Lamp Power :	2*17~40W or 1*50~79W
Mains Frequency :	47~63Hz	Output Current :	0.39~0.43A typ.
Input Power :	42~92W	Output Frequency :	37~46KHz
Input Current :	Max.0.84A at 110Vrms	Preheat Time :	4S
	Max.0.38A at 240Vrms	Preheat Current :	0.40A
Power Factor :	0.99 typ.	Efficiency :	87% Max. load
Lamp Type :	1*GPH1148T5 GPH1554T5 GPH1630T5 TUV64T5		
	2*GPH357T5 GPH436T5 GPH793T5 GPH843T5 TUV25W TUV36W		
	TUV36T5		

### RH2-800-2/75U

AC Source :	99~305V	Lamp Power :	2*35~75W or 1*100~155W
Mains Frequency :	47~63Hz	Output Current :	0.70~0.85A typ.
Input Power :	85~167W	Output Frequency :	37~46KHz
Input Current :	Max.1.50A at 110Vrms	Preheat Time :	4S
	Max.0.73A at 240Vrms	Preheat Current :	0.85A
Power Factor :	0.99 typ.	Efficiency :	93% Max. load
Lamp Type :	1*GHO64T5 TUV64T5HO PL-L95WHO TL80W TL100W		
	2*GPH436T5HO GPH846T5HO GHO36T5 TUV36T5HO TUV55WHO		
	TUV75WHO TUV25W PL-L35WHO PL-L60WHO TL60W		

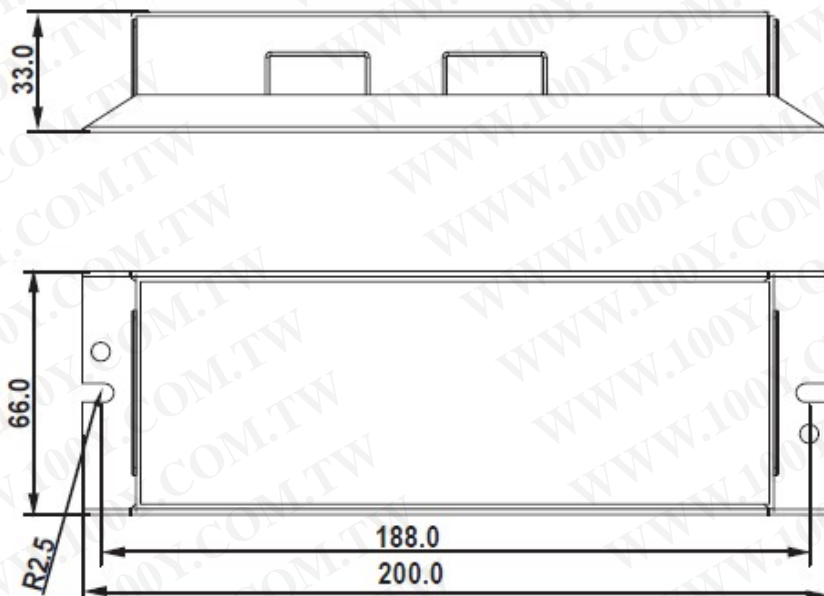

### Wiring Diagram

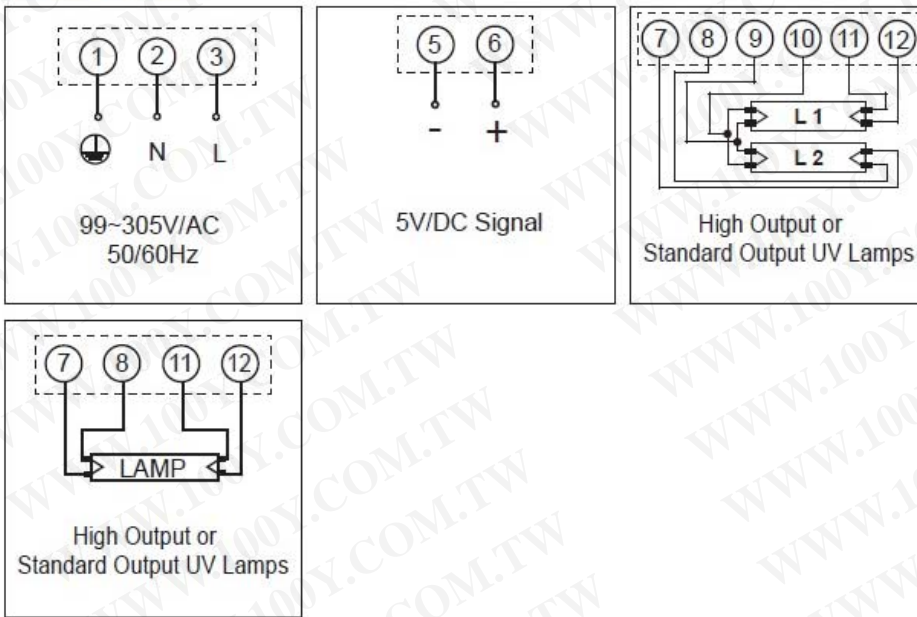

### Features & Functions

- Preheat Start
  - Constant Current Output
  - Limiting Lamp Power
  - Lamp Open Protection
  - Lamp Fault Protection
  - Status Indication / Remote
  - DC 5V Signal
- Lamp on: Max.5V/DC Max.5mA, Lamp fault: 0V