


GP1A50HR/GP1A51HR GP1A52HR/GP1A53HR


OPIC
Photointerrupter

■ Features

1. High sensing accuracy (Slit width : 0.5mm)
2. LSTTL and TTL compatible output
3. Both-sides mounting type : **GP1A50HR** (Gap: 3mm)
Either-side mounting type : **GP1A51HR** (Gap: 3mm)
PWB mounting type : **GP1A52HR** (Gap: 3mm)
GP1A53HR (Gap: 5mm)

■ Outline Dimensions

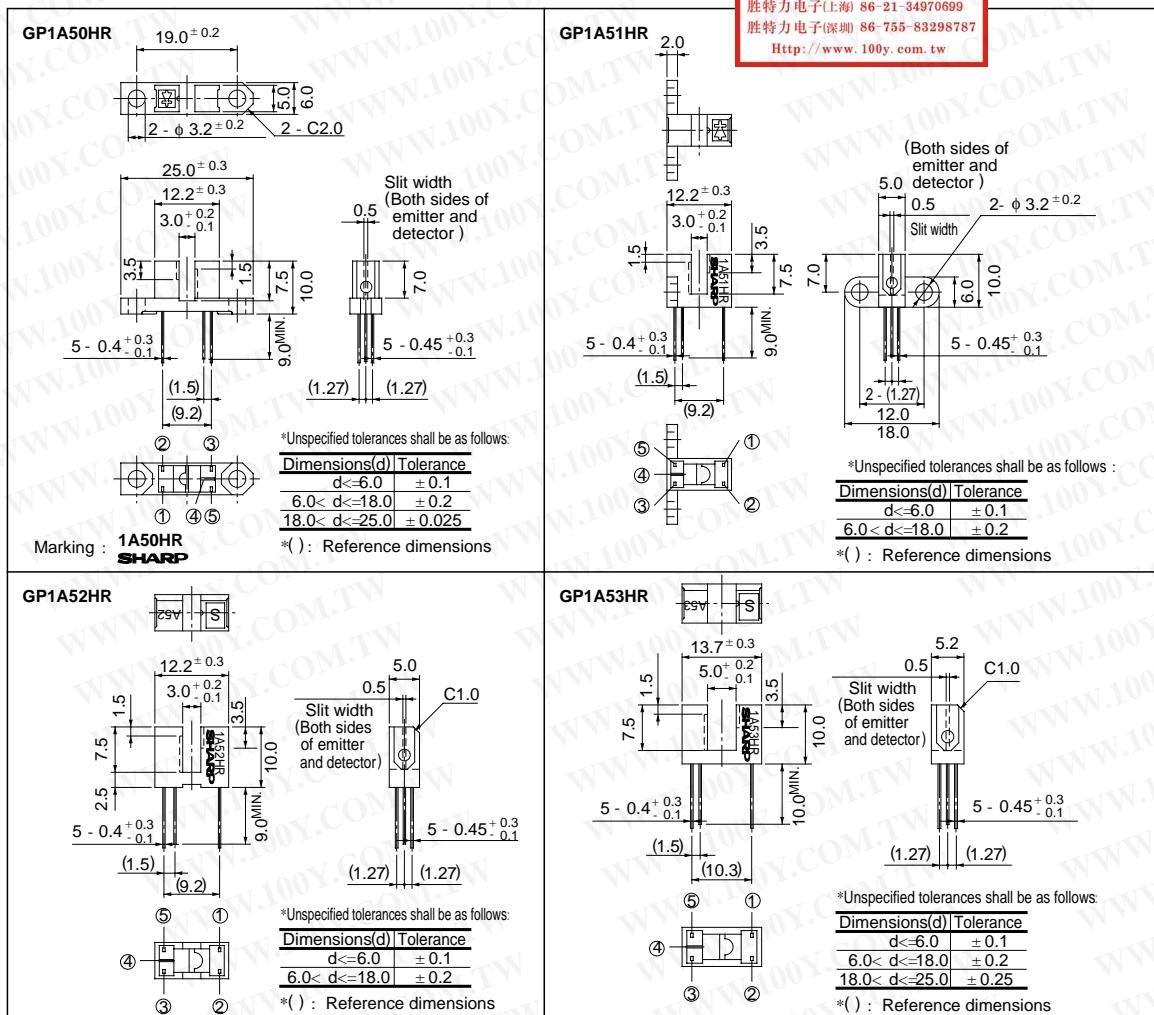

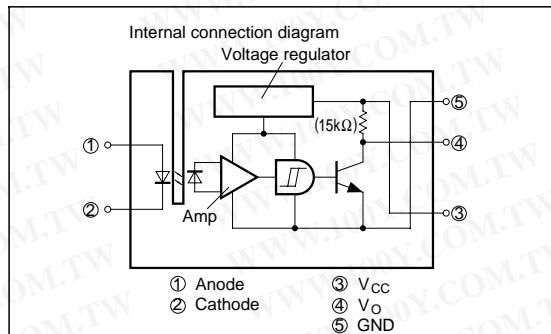

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ Absolute Maximum Ratings

(Ta= 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	*1 Peak forward current	I _{FM}	1	A
	Reverse voltage	V _R	6	V
Output	Power dissipation	P	75	mW
	Supply voltage	V _{CC}	- 0.5 to + 17	V
	Output current	I _O	50	mA
Operating temperature		T _{opr}	- 25 to + 85	°C
Storage temperature		T _{stg}	- 40 to + 100	°C
*2 Soldering temperature		T _{sol}	260	°C

*1 Pulse width<=100μs, Duty ratio= 0.01

*2 For 5 seconds

■ Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage GP1A50HR/GP1A51HR GP1A52HR	V _F	I _F = 5mA	-	1.1	1.4	V
		V _F	I _F = 8mA	-	1.14	1.4	V
	Reverse current	I _R	V _R = 3V	-	-	10.0	μA
Output	Operating supply voltage	V _{CC}		4.5	-	17.0	V
	Low level output voltage	V _{OL}	V _{CC} = 5V, I _F = 0, I _{OL} = 16mA	-	0.15	0.4	V
	High level output voltage	V _{OH}	V _{CC} = 5V, *5I _F = 5mA	4.9	-	-	V
	Low level supply current	I _{CCL}	V _{CC} = 5V, I _F = 0	-	1.7	3.8	mA
	High level supply current	I _{CCH}	V _{CC} = 5V, *5I _F = 5mA	-	0.7	2.2	mA
Transfer characteristics	*3“Low→High” threshold input current	I _{FLH}	V _{CC} = 5V	-	1.0	5.0	mA
	GP1A53HR	I _{FLH}	V _{CC} = 5V	-	1.5	8.0	mA
	*4 Hysteresis	I _{FHL} / I _{FLH}	V _{CC} = 5V	0.55	0.75	0.95	
	“Low→High” propagation delay time	t _{PLH}	V _{CC} = 5V, *5I _F = 5mA R _L = 280Ω	-	3.0	9.0	μs
	“High→Low” propagation delay time	t _{PHL}		-	5.0	15.0	
	Rise time	t _r		-	0.1	0.5	
	Fall time	t _r		-	0.05	0.5	

*3 I_{FLH} represents forward current when output changes from low to high.*4 I_{FHL} represents forward current when output changes from high to low. Hysteresis stands for I_{FHL} / I_{FLH}.*5 GP1A53HR Condition of V_{OH}, I_{CCH}. Response time; I_F= 8mA

■ Recommended Operating Conditions

Parameter	Symbol	Operating temp.	MIN.	MAX.	Unit
Low level output current	I _{OL}	Ta = 0 to + 70°C	-	16.0	mA
Forward current	I _F		10.0	20.0	mA

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Fig. 1 Forward Current vs. Ambient Temperature

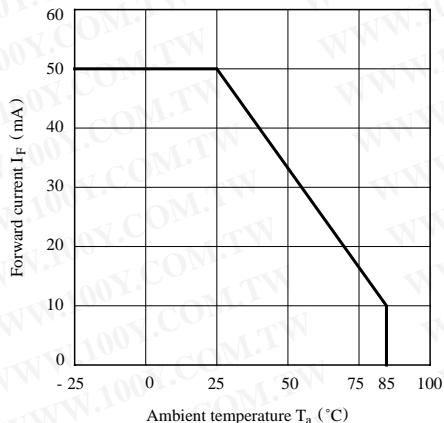


Fig. 2 Output Power Dissipation vs. Ambient Temperature

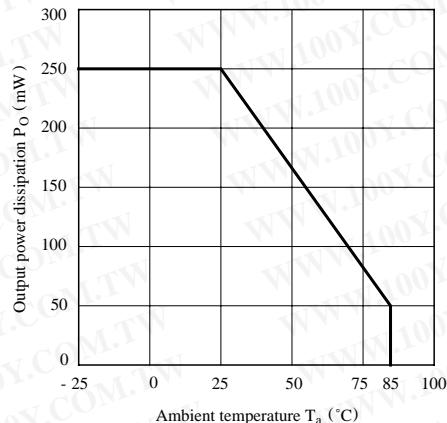


Fig. 3 Low Level Output Current vs. Ambient Temperature

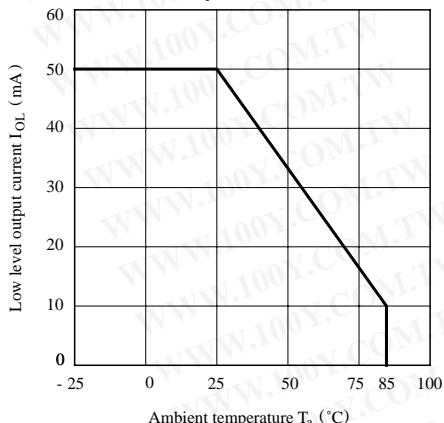


Fig. 4 Forward Current vs. Forward Voltage

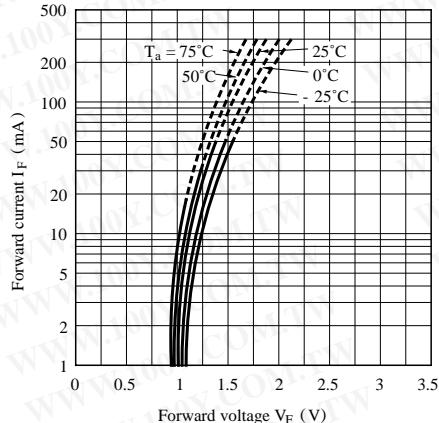


Fig. 5 Relative Threshold Input Current vs. Supply Voltage

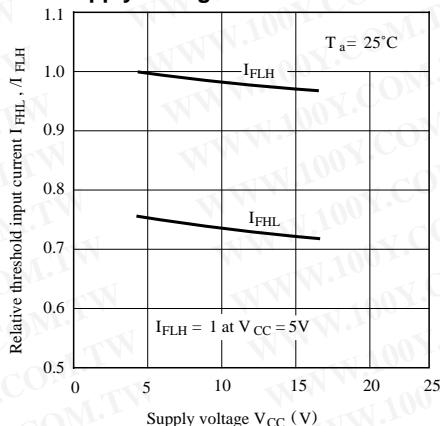


Fig. 7 Low Level Output Voltage vs. Low Level Output Current

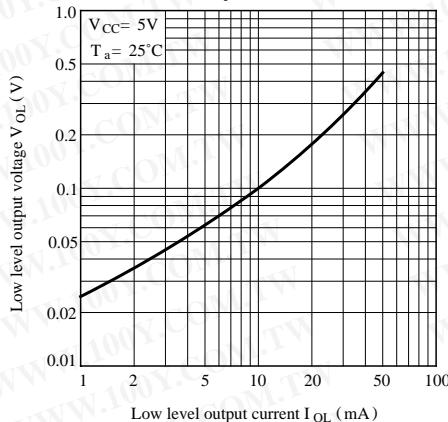


Fig. 9 Supply Current vs. Ambient Temperature

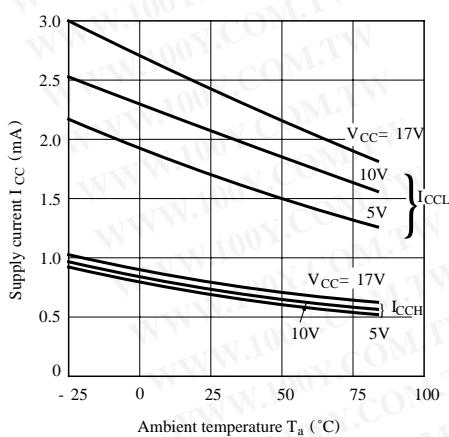


Fig. 6 Relative Threshold Input Current vs. Ambient Temperature

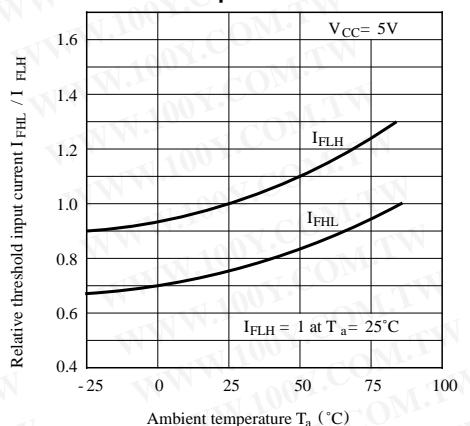


Fig. 8 Low Level Output Voltage vs. Ambient Temperature

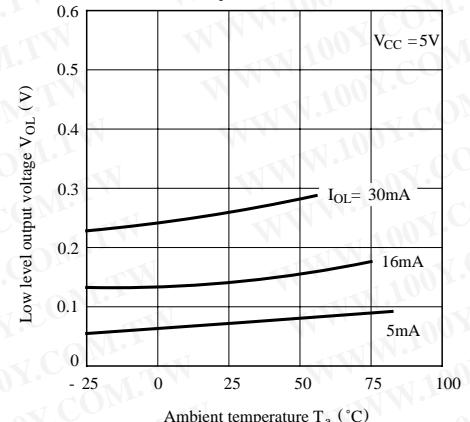
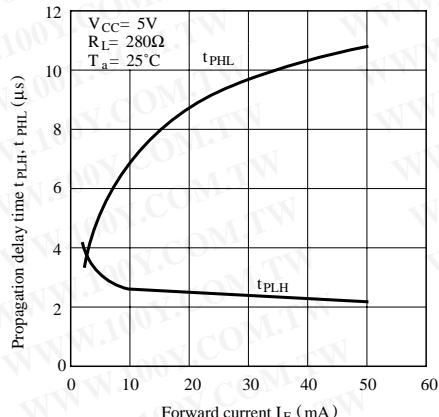
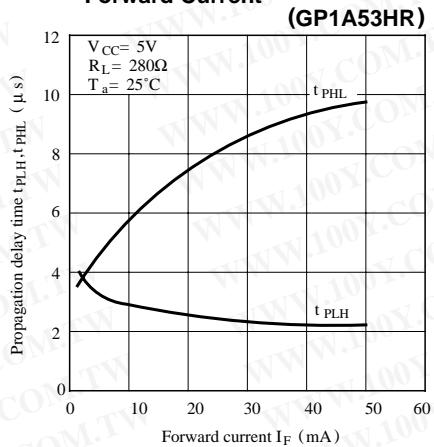



Fig.10-a Propagation Delay Time vs. Forward Current (GP1A50HR/GP1A51HR/GP1A52HR)





**Fig.10-b Propagation Delay Time vs.
Forward Current**



**Fig.12 Rise Time, Fall Time vs.
Load Resistance**

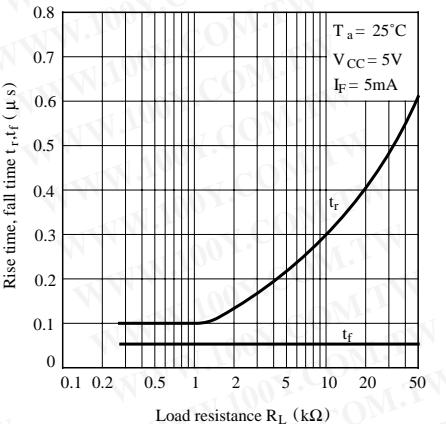

Test Circuit for Response Time

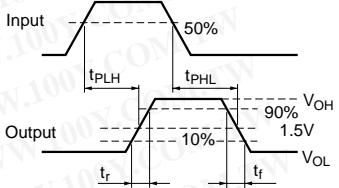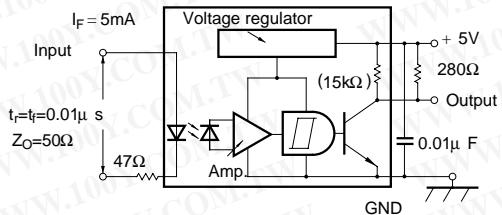

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ Precautions for Use

- (1) In order to stabilize power supply line, connect a by-pass capacitor of more than $0.01\mu F$ between V_{CC} and GND near the device.
- (2) In case of cleaning, use only the following type of cleaning solvent.
Ethyl alcohol, Methyl alcohol, Isopropyl alcohol
- (3) As for other general cautions refer to the chapter "Precautions for Use".