

150W Single Output Switching Power Supply

HLG-150H series

特力材料886-3-5753170 胜特力电子(上海) 86-21-34970699 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw



■ Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 94%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Type HL LED Driver for use in Class I, Division 2 hazardous location luminaires
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)



















HLG-150H-12 A

Blank: IP67 rated. Cable for I/O connection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.


D (option, safety pending): IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION


MODEL		HLG-150H-12	HLG-150H-15	HLG-150H-20	HLG-150H-24	HLG-150H-30	HLG-150H-36	HLG-150H-42	HLG-150H-48	HLG-150H-54				
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54 V				
N.100X	CONSTANT CURRENT REGION Note.4	6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V				
	RATED CURRENT	12.5A	10A	7.5A	6.3A	5A	4.2A	3.6A	3.2A	2.8A				
	RATED POWER	150W	150W	150W	151.2W	150W	151.2W	151.2W	153.6W	151.2W				
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p				
	VOLTAGE ADJ. RANGE Note.6		4 8 8 4 7	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V				
UTPUT	OW: 1	Can be adjusted by internal potentiometer A type only												
	CURRENT ADJ. RANGE	7.5 ~ 12.5A	6 ~ 10A	4.5 ~ 7.5A	3.8 ~ 6.3A	3 ~ 5A	2.5 ~ 4.2A	2.16 ~ 3.6A	1.92 ~ 3.2A	1.68 ~ 2.8/				
	VOLTAGE TOLERANCE Note.3		±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%				
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	SETUP, RISE TIME Note.8			00ms,50ms/23					100					
	HOLD UP TIME (Typ.)	16ms at full lo			o viito at iaii ioa	id , b type 100	01113,2001113/11	5 V/10 5001110	3,2001113/2004/	10 01 30 70 11				
-1					-1 COA	-41	<u> </u>	-TAN W	-×1 C	0///-				
	VOLTAGE RANGE Note.5 FREQUENCY RANGE	90 ~ 305VAC 127 ~ 431VDC 47 ~ 63Hz												
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.92/277VAC at full load (Please refer to "Power Factor Characteristic" curve) THD< 20% when output loading ≥ 60% at 115VAC/230VAC input and output loading ≥ 75% at 277VAC input												
NPUT			 							0.404				
	EFFICIENCY (Typ.)	91.5%	92%	93%	93%	93.5%	93.5%	94%	94%	94%				
	AC CURRENT (Typ.)	1.7A / 115VAC 0.75A / 230VAC 0.7A / 277VAC												
	INRUSH CURRENT (Typ.)	COLD START 65A(twidth=425 \(\mu\) s measured at 50% Ipeak) at 230VAC												
	LEAKAGE CURRENT	<0.75mA/277VAC												
	OVER CURRENT	95 ~ 108% Protection type: Constant current limiting, recovers automatically after fault condition is removed												
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed												
ROTECTION	11007	14 ~ 17V	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 63V	59 ~ 65V				
	OVER VOLTAGE	Protection tyr	e : Shut down	o/p voltage wit	h auto-recoven	v or re-power o	n to recovery		11/11	400				
	OVER TEMPERATURE	Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery Shut down o/p voltage, recovers automatically after temperature goes down												
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")												
	WORKING HUMIDITY	20 ~ 95% RH non-condensing												
NVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,		9		1100	.011.3			- TXV .1				
MANOMINEM	TEMP. COEFFICIENT	±0.03%/°C (1111			-01	COM			1				
		4343		ala maniani fan "	70in anah ala	V V 7	- and			-1111				
	VIBRATION		<u> </u>	cle, period for				IDC7 IC4047	4 104047.0	10				
	SAFETY STANDARDS Note.7	100		50.0-08, EN61;		17-2-13 Indepe	endent IP65 or	1P67, J61347	·1, Jb134 <i>1</i> -2-1	3 approve				
AFFTV 0		-		TUV EN60950		2 110				M. J.				
AFETY &	WITHSTAND VOLTAGE	7		G:2KVAC O		(N 41.	CO	Mr.						
MC	ISOLATION RESISTANCE			00M Ohms / 50			$\theta_{0,j}$.	1						
	EMC EMISSION			N55022 (CISPF					-					
	EMC IMMUNITY			2,3,4,5,6,8,11,		5024, light ind	ustry level (sur	ge 4KV), criteri	ia A					
	MTBF	192.2K hrs m	414.	BK-217F (25°C)		- cox.	1						
THERS	DIMENSION	228*68*38.8r	mm	Mr.			Too	COMP.	1					
	PACKING	•	s/14.8Kg/0.8C		N	Al A.	-100X		IW					
IOTE	All parameters NOT special Ripple & noise are measure Tolerance : includes set up Please refer to "DRIVING N Derating may be needed ur A type only. Safety and EMC design ref Length of set up time is me The power supply is considion complete installation, the fir Refer to warranty stateme	ed at 20MHz of tolerance, line METHODS OF inder low input er to EN60598 assured at cold lered as a com- nal equipment	of bandwidth be regulation and LED MODUL voltages. Pleaself, subject 87 if first start. Turn ponent that we	y using a 12" t d load regulati .E". ase check the s '50(UL), CNS1 ming ON/OFF rill be operated	wisted pair-wir on. static character 5233, GB7000 the power sup in combination	e terminated viristics for more 1.1, FCC part1 ply may lead in with final equ	vith a 0.1uf & details. 8. to increase of uipment. Since	47uf parallel ca the set up time EMC perform	· •.	ffected by t				

11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently




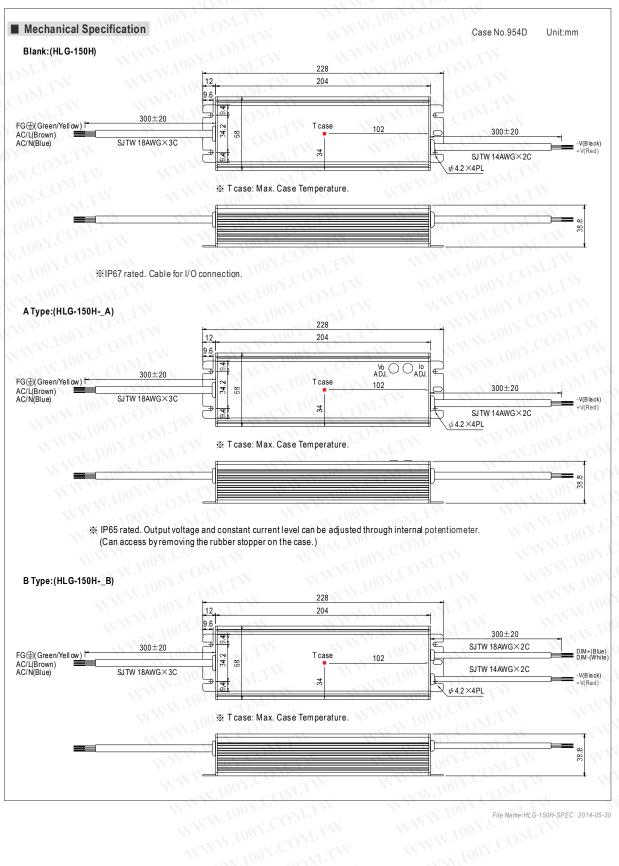



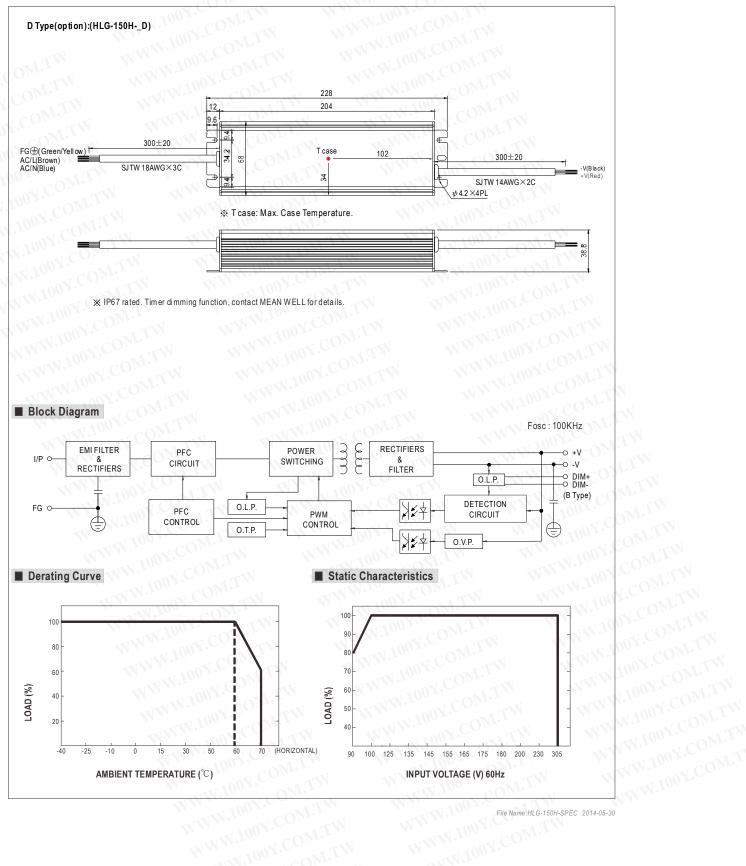




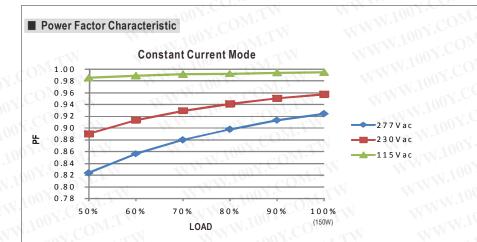

■ EFFICIENCY vs LOAD (48V Model)

HLG-150H series possess superior working efficiency that up to 94% can be reached in field applications.

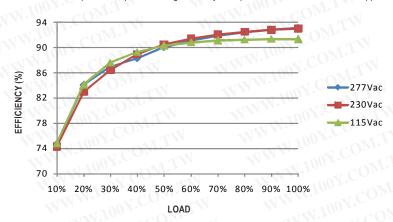


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

WWW.100X.COM.




Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



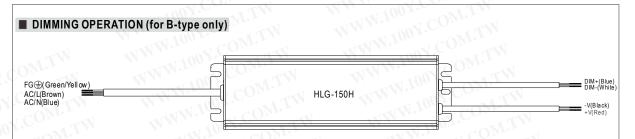

- ※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- ※ Please DO NOT connect "DIM-" to "-V".
- * Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	10KΩ	20 K Ω	30 K Ω	40 K Ω	50KΩ	60KΩ	70K Ω	80KΩ	90KΩ	$100 \text{K}\Omega$	OPEN
	Multiple drivers	10K Ω/N	20K Ω /N	30K Ω/N	40K Ω/N	50K Ω/N	60K Ω/N	70K Ω /N	80K Ω /N	90K Ω /N	100K Ω /N	Y.COM
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

※ 1 ~ 10V dimming function for output current adjustment (Typical)


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

imes 10V PWM signal for output current adjustment (Typical): Frequency range : 100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

- **Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- *Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF:

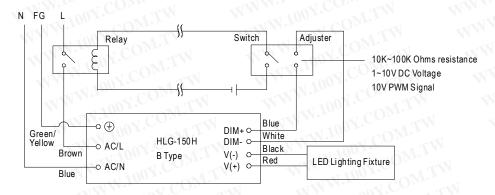

WWW.100Y.COM.

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-
- 2.The LED lighting fixture can be turned ON/OFF by the switch.



