



Features :

- AC input 180 ~ 264VAC
- AC input active surge current limiting
- High efficiency up to 91%
- Built-in active PFC function, PF>0.95
- Protections: Short circuit / Overload / Over voltage / Over temperature / Fan alarm
- Forced air cooling by built-in DC with fan speed control function
- Output voltage can be trimmed between 20~110% of the rated output voltage
- High power density 12.5W/inch³
- Current sharing up to 2 units
- Alarm signal output (relay contact and TTL signal)
- Built-in 12V/0.1A auxiliary output for remote control
- Built-in remote ON-OFF control
- Built-in remote sense function
- 3 years warranty



SPECIFICATION


MODEL	RSP-2400-12		RSP-2400-24		RSP-2400-48	
OUTPUT	DC VOLTAGE	12V		24V		48V
	RATED CURRENT	166.7A		100A		50A
	CURRENT RANGE	0 ~ 166.7A		0 ~ 100A		0 ~ 50A
	RATED POWER	2000.4W		2400W		2400W
	RIPPLE & NOISE (max.) Note.2	150mVp-p		150mVp-p		200mVp-p
	VOLTAGE ADJ. RANGE	10.8 ~ 13.2V		22 ~ 28V		43 ~ 56V
	VOLTAGE TOLERANCE Note.3	±1.0%		±1.0%		±1.0%
	LINE REGULATION	±0.5%		±0.5%		±0.5%
	LOAD REGULATION	±0.5%		±0.5%		±0.5%
	SETUP, RISE TIME	1000ms, 80ms at full load				
	HOLD UP TIME (Typ.)	10ms at full load				
INPUT	VOLTAGE RANGE	180 ~ 264VAC		254 ~ 370VDC		
	FREQUENCY RANGE	47 ~ 63Hz				
	POWER FACTOR (Typ.)	0.95/230VAC at full load				
	EFFICIENCY (Typ.)	87%		89.5%		91.5%
	AC CURRENT (Typ.)	15.5A/180VAC		12A/230VAC		
	INRUSH CURRENT (Typ.)	60A/230VAC				
	LEAKAGE CURRENT	<2.0mA / 240VAC				
PROTECTION	OVERLOAD	100 ~ 110% rated output power User adjustable continuous constant current limiting or constant current limiting with delay shutdown after 5 seconds, re-power on to recover				
	OVER VOLTAGE	13.8 ~ 16.8V		28.8 ~ 33.6V		57.6 ~ 67.2V
		Protection type : Shut down o/p voltage, re-power on to recover				
	OVER TEMPERATURE	95℃ ±5℃ (12V), 100℃ ±5℃ (24V,48V) (TSW1: detect on heatsink of power transistor) 95℃ ±5℃ (12V), 85℃ ±5℃ (24V), 80℃ ±5℃ (48V) (TSW2 : detect on heatsink of o/p diode) Protection type : Shut down o/p voltage, recovers automatically after temperature goes down				
FUNCTION	AUXILIARY POWER(AUX)	12V@0.1A(Only for Remote ON/OFF control)				
	REMOTE ON/OFF CONTROL	Please see the Function Manual				
	ALARM SIGNAL OUTPUT	Please see the Function Manual				
	OUTPUT VOLTAGE TRIM	2.4 ~ 13.2V		4.8 ~ 28V		9.6 ~ 56V
	CURRENT SHARING	Please see the Function Manual				
ENVIRONMENT	WORKING TEMP.	-20 ~ +70℃ (Refer to output load derating curve)				<div>勝特力材料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw</div>
	WORKING HUMIDITY	20~90% RH non-condensing				
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.05%/℃ (0 ~ 50℃)				
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes				
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved				
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC				
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH				
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22)				
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3				
OTHERS	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, light industry level, criteria A				
	MTBF	106.7K hrs min. MIL-HDBK-217F (25℃)				
	DIMENSION	278*177.8*63.5mm (L*W*H)				
	PACKING	3.3Kg; 4pcs/14.2Kg/1.89CUFT				
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.					

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Mechanical Specification

Case No.982B

Unit:mm

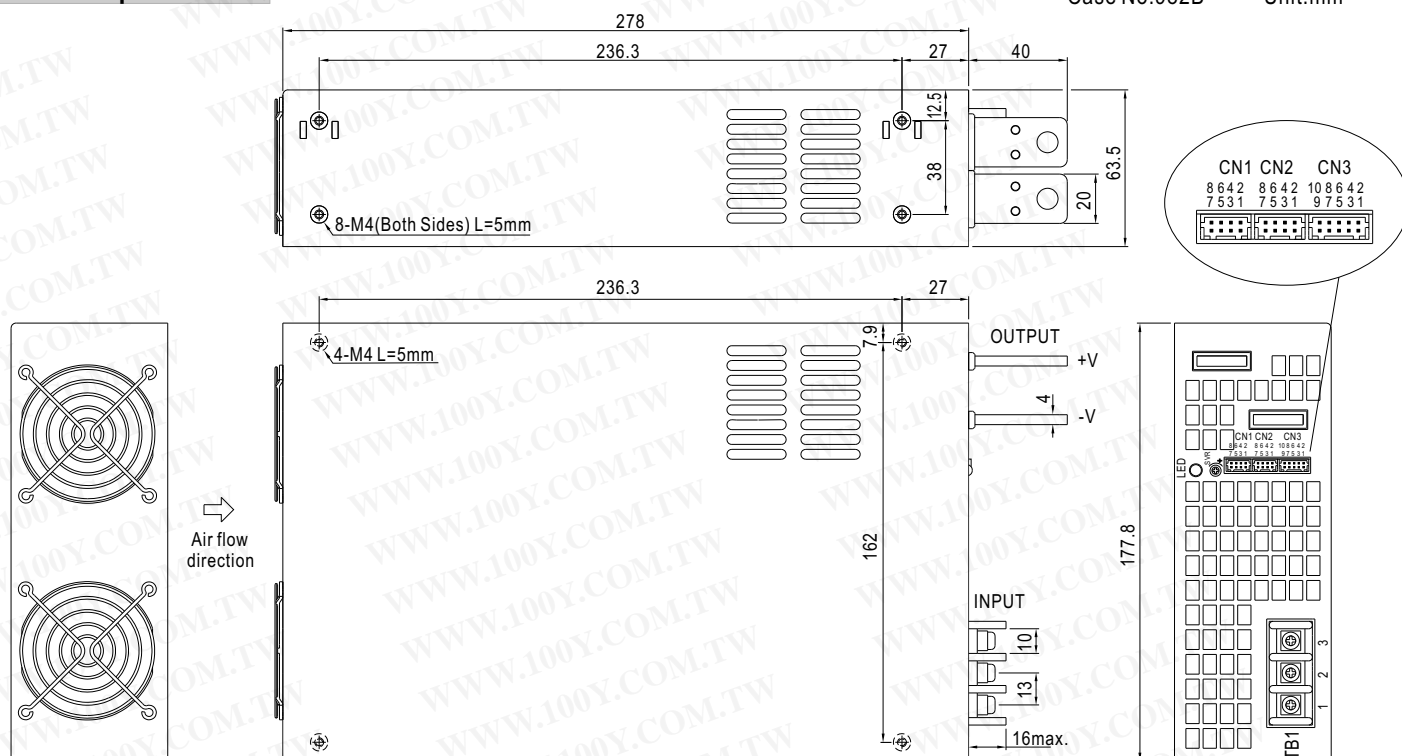

AC Input Terminal Pin No. Assignment

Pin No.	Assignment
1	AC/L
2	AC/N
3	FG \perp

Control Pin No. Assignment(CN1,CN2) : HRS DF11-8DP-2DS or equivalent

Pin No.	Assignment	Pin No.	Assignment	Mating Housing	Terminal
1	RCG	5,7	-S	HRS DF11-8DS or equivalent	HRS DF11-**SC or equivalent
2	RC	6	CS(Current Share)		
3	PV	8	+S		
4	PS				

RCG: Remote ON/OFF Ground

RC : Remote ON/OFF

PV :Output Voltage External Control

PS : Reference Voltage Terminal

-S : -Remote Sensing

CS: Load Share

+S: +Remote Sensing

Control Pin No. Assignment(CN3) : HRS DF11-10DP-2DS or equivalent

Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment	Mating Housing	Terminal
1	P OK GND	4	P OK2	7	AUXG	10	OL-SD	HRS DF11-10DS or equivalent	HRS DF11-**SC or equivalent
2	P OK	5	RCG	8	AUX				
3	P OK GND2	6	RC	9	OLP				

P OK GND: Power OK Ground

P OK: Power OK Signal (Relay Contact)

P OK2: Power OK Signal (TTL Signal)

RCG: Remote ON/OFF Ground

RC: Remote ON/OFF


AUXG: Auxiliary Ground

AUX: Auxiliary Output

OLP: OLP Signal


OL-SD: OLP Shutdown Signal

Block Diagram

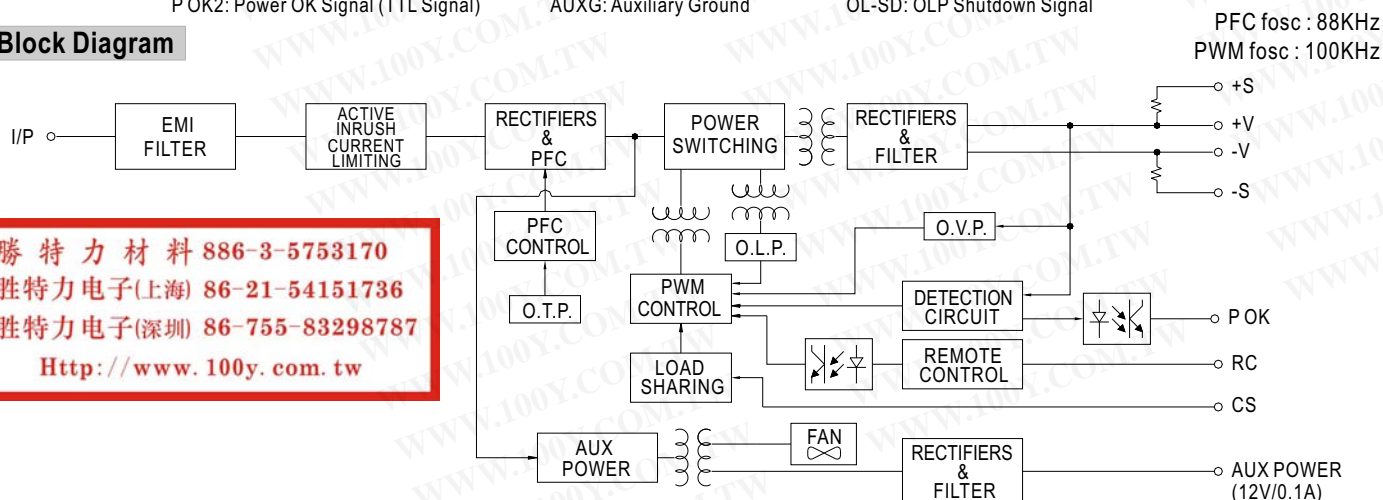


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Derating Curve

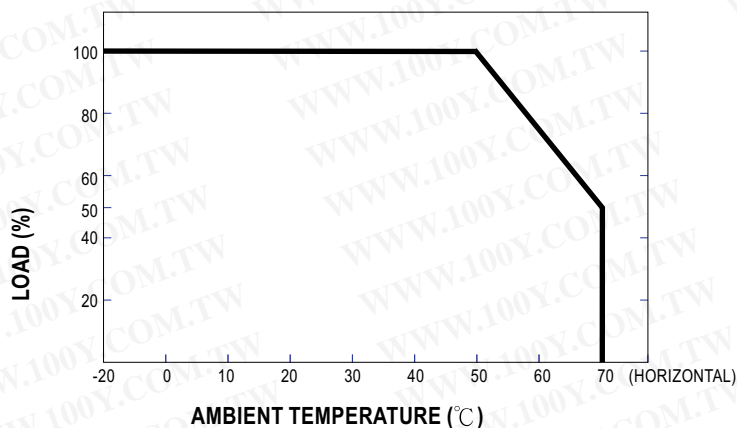

Static Characteristics

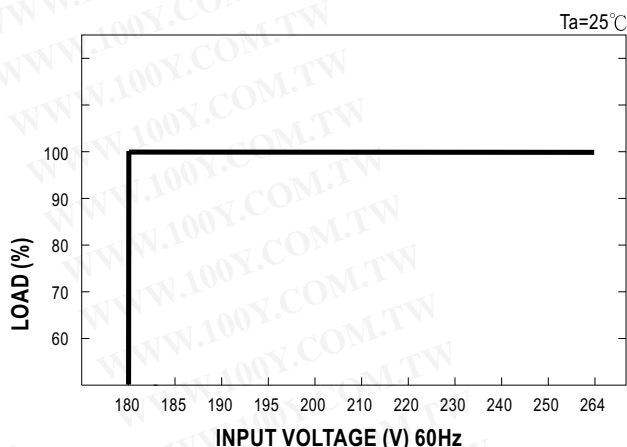

Function Manual

1.Remote ON/OFF


- Remote ON/OFF control becomes available by applying voltage in CN1 & CN2 & CN3.
- Table 1.1 shows the specification of Remote ON/OFF function.
- Fig.1.2 shows the example to connect Remote ON/OFF control function.

Table 1.1 Specification of Remote ON/OFF


Connection Method		Fig. 1.2(A)	Fig. 1.2(B)	Fig. 1.2(C)
SW Logic	Output on	SW Open	SW Open	SW Close
	Output off	SW Close	SW Close	SW Open

Fig.1.2 Examples of connecting remote ON/OFF


(A)Using external voltage source

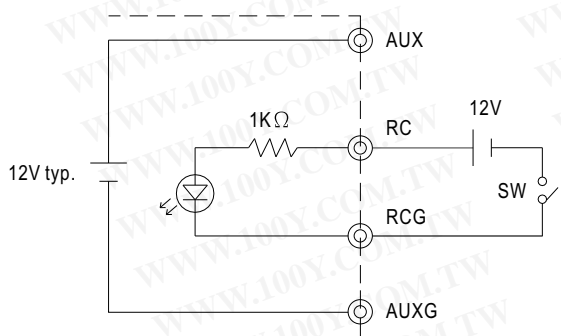

(B)Using internal 12V auxiliary output

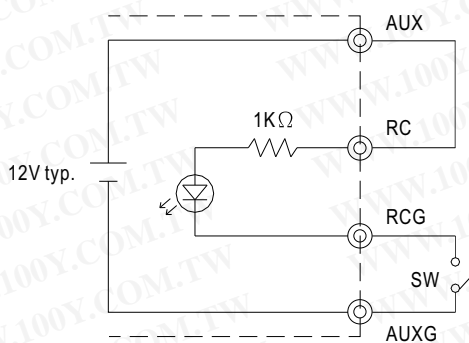


(C)Using internal 12V auxiliary output

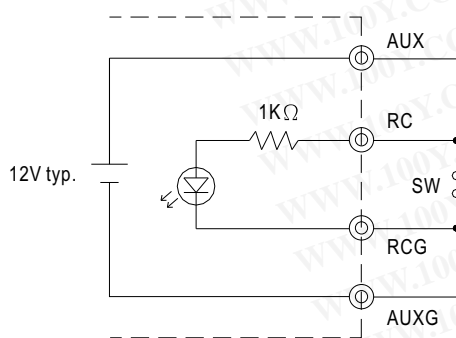

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

4. Current Sharing

- (1) Parallel operation is available by connecting the units shown as below (+S, -S and CS are connected mutually in parallel):
- (2) The voltage difference among each output should be minimized that less than $\pm 2\%$ is required.
- (3) The total output current must not exceed the value determined by the following equation.
(Output current at parallel operation) = (The rated current per unit) \times (Number of unit) \times 0.9
- (4) In parallel operation 2 units is the maximum, please consult the manufacturer for other applications.
- (5) When remote sensing is used in parallel operation, the sensing wire must be connected only to the master unit.
- (6) Wires of remote sensing should be kept at least 10 cm from input wires.

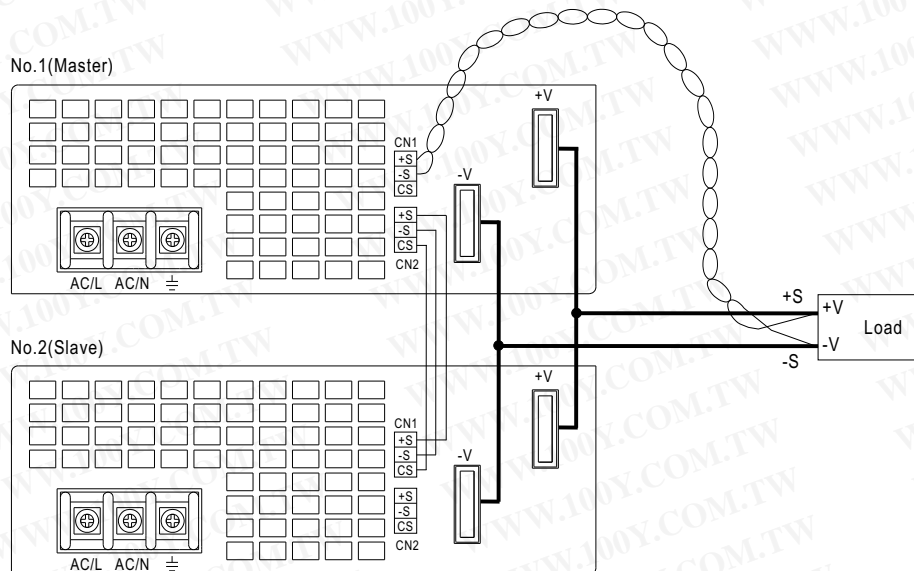

- (7) Under parallel operation, the "output voltage trim" function is not available.

5. Select O.L.P mode

- (1) Remove the shorting connector on CN3 that is shown in Fig 5.1, the O.L.P. mode will be "continuous constant current limiting".
- (2) Insert the shorting connector on CN3 that is shown in Fig 5.2, the O.L.P. mode will be "constant current limiting with delay shutdown after 5 seconds, re-power on to recover".




Fig. 5.1 Remove the CN3




Fig. 5.2 Insert the CN3