

ULTRA MINIATURE 2-POLES 2A (SLIM PROFILE SIGNAL RELAY) FTR-B4 Series

RoHS compliant

■ FEATURES

- DPDT 2A
- Ultra miniature slim type relay for surface mounting
 Height: 9.3 mm maximum (THT)
 10 mm maximum (SMT)
 Weight: Approximately 1.0 g
- Conforms to Bellcore & FCC part 68, and Telcordia & FCC part 68
- Conforms to UL1950 / CSA 950, IEC 950 / EN60950 spacing and high breakdown voltage
 Clearance: 1.0mm
 Creepage: 1.6mm
 Basic insulation, 150V working voltage, pollution degree 2
- High reliable bifurcated gold overlay silver contact
- Low power consumption 140 mV (standard), 100 mW (latching)
- RoHS compliant since date code: 0430B8
 Please see page 8 for more information



■ ORDERING INFORMATION

FTR-B4 C A 4.5 Z - B 05
 [Example] (a) (b) (c) (d) (e) (f) (g)

(a)	Series Name	FTR-B4 Series
(b)	Terminal type	C: Through hole G: surface mount S: surface mount type - space saving
(c)	Operation function	A: standard type B: latching type
(d)	Coil Number	Nominal voltage
(e)	Contact material	Z: gold overlay silver nickel (standard) P: gold overlay silver palladium
(f)	Relay enclosing direction*	B: standard enclosing direction
(g)	Number of relays per reel*	05: 500 (standard)

Remarks: Actual marking on relay would not carry code FTR and be as below:

Ordering code Actual marking

Notes: *FTR-B4CA4.5Z → B4CA4.5Z

- Only surface mount types (G and S) are applicable

- All relays are packaged in tubes unless P/N ends with -B05

FTR-B4 Series

■ PART NUMBERS

Standard type

Ordering Part Number	Series	Terminal Type	Operation	Coil Voltage	Contact Material
FTR-B4CA1.5Z	FTR-B3	C: through hole	A: non-latch	1.5	Z: Au-Ag-Ni P: Au-Ag-Pd
FTR-B4CA003Z				3	
FTR-B4CA4.5Z				4.5	
FTR-B4CA006Z				6	
FTR-B4CA009Z				9	
FTR-B4CA012Z				12	
FTR-B4CA024Z				24	
FTR-B4GA1.5Z		G: surface mount		1.5	
FTR-B4GA003Z				3	
FTR-B4GA4.5Z				4.5	
FTR-B4GA006Z				6	
FTR-B4GA009Z				9	
FTR-B4GA012Z				12	
FTR-B4GA024Z				24	
FTR-B4SA1.5Z		S: space saving surface mount		1.5	
FTR-B4SA003Z				3	
FTR-B4SA4.5Z				4.5	
FTR-B4SA006Z				6	
FTR-B4SA009Z				9	
FTR-B4SA012Z				12	
FTR-B4SA024Z				24	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

FTR-B4 Series

Latching type (1 coil)

Ordering Part Number	Series	Terminal Type	Operation	Coil Voltage	Contact Material
FTR-B4CB1.5Z	FTR-B3	C: through hole	B: latch	1.5	Z: Au-Ag-Ni P: Au-Ag-Pd
FTR-B4CB003Z				3	
FTR-B4CB4.5Z				4.5	
FTR-B4CB006Z				6	
FTR-B4CB009Z				9	
FTR-B4CB012Z				12	
FTR-B4CB024Z				24	
FTR-B4GB1.5Z		G: surface mount		1.5	
FTR-B4GB003Z				3	
FTR-B4GB4.5Z				4.5	
FTR-B4GB006Z				6	
FTR-B4GB009Z				9	
FTR-B4GB012Z				12	
FTR-B4GB024Z				24	
FTR-B4SB1.5Z		S: space saving surface mount		1.5	
FTR-B4SB003Z				3	
FTR-B4SB4.5Z				4.5	
FTR-B4SB006Z				6	
FTR-B4SB009Z				9	
FTR-B4SB012Z				12	
FTR-B4SB024Z				24	

COIL DATA CHART

Standard type

Coil Voltage	Nominal Voltage (VDC)	Max. Coil Voltage* ¹	Coil Resistance (±10%)	Must Operate Voltage* ²	Must Release Voltage* ²	Nominal Power (mW)
1.5	1.5	3.53 VDC	16.1 Ω	1.13 VDC	0.15 VDC	140
003	3	7.05 VDC	64.3 Ω	2.25 VDC	0.3 VDC	
4.5	4.5	10.58 VDC	145 Ω	3.38 VDC	0.45 VDC	
006	6	14.10 VDC	257 Ω	4.5 VDC	0.6 VDC	
009	9	21.15 VDC	579 Ω	6.75 VDC	0.9 VDC	
012	12	28.20 VDC	1,028 Ω	9.0 VDC	1.2 VDC	
024	24	56.40 VDC	2,504 Ω	18.0 VDC	2.4 VDC	230

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Latching type (1 coil)

Coil Voltage	Nominal Voltage (VDC)	Max. Coil Voltage* ¹	Coil Resistance (±10%)	Must Operate Voltage* ²	Must Release Voltage* ²	Set/Re-set current	Nominal Power (mW)
1.5	1.5	3.53 VDC	22.5 Ω	1.13 VDC	-0.13 VDC	50mA	100
003	3	7.05 VDC	90 Ω	2.25 VDC	-2.25 VDC	25mA	
4.5	4.5	10.58 VDC	203 Ω	3.38 VDC	-3.38 VDC	17mA	
006	6	14.10 VDC	360 Ω	4.5 VDC	-4.5 VDC	13mA	
009	9	21.15 VDC	810 Ω	6.75 VDC	-6.75 VDC	8mA	
012	12	28.20 VDC	1,440 Ω	9.0 VDC	-9.0 VDC	6mA	120
024	24	56.40 VDC	4,800 Ω	18.0 VDC	-18.0 VDC	4mA	

* Pulse driven

Note: All values in the table are measured at 20°C.

■ SPECIFICATIONS






			Standard Type	Latching Type
			FTR-B4 () A	FTR-B4-C () B
Contact	Arrangement		2 Form C	
	Contact material		Gold overlay silver nickel / Gold overlay silver palladium	
	Contact type		Bifurcated contact (cross-bar)	
	Contact resistance (initial value)		100mΩ maximum at 6VDC 1	
	Contact rating		30 VDC 1A, 125 VAC 0.3 A (resistive)	
	Maximum carrying current		2A	
	Maximum switching power		62.5 VA / 30W	
	Maximum switching voltage		250 VAC/ 220 VDC	
	Minimum switching load*		10m VDC, 0.01mA*	
Coil	Nominal power (at 20°C)		140 mW up to 230 mW	100 mW up to 130 mW
	Operate power (at 20°C)		80 mW up to 130 mW	57 mW up to 68 mW
	Operating temperature (no frost)		-40°C to +85°C	
Time value	Operate (at nominal voltage, without bounce)		3ms maximum	3ms maximum (set)
	Release (at nominal voltage, without bounce)		3ms maximum	3ms maximum (reset)
Life	Mechanical		50 x 10 ⁶ operations	20 x 10 ⁶ operations
	Electrical (resistive load)	DC load	100 x 10 ³ ops. min. at 1A, 30 VDC (at 0.5 Hz)	
		AC load	100 x 10 ³ ops. min. at 0.3A, 125VAC (at 0.5 Hz)	
Vibration resistance	Misoperation		10 to 55 Hz at double amplitude of 3 mm	
	Endurance		10 to 55 Hz at double amplitude of 5 mm	
Shock resistance	Misoperation		Min. 750 m/s ²	
	Endurance		Min. 1,000 m/s ²	
Weight			Approximately 1.0 g	
US/CSA	Contact rating		0.5A, 125 VAC; 1A, 30 VDC; 0.3A, 110 VDC	

*1 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

FTR-B4 Series







■ CHARACTERISTIC DATA

● Non-latch

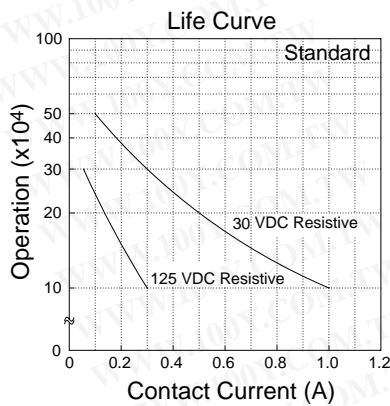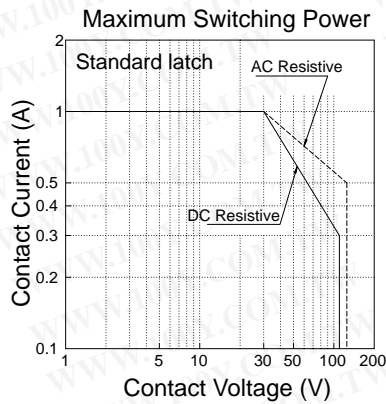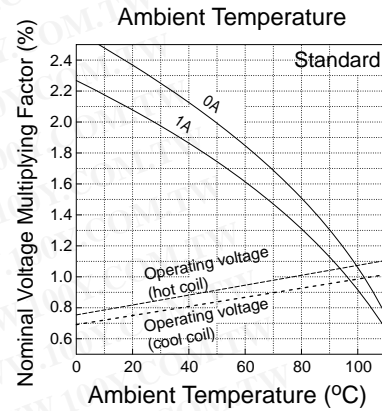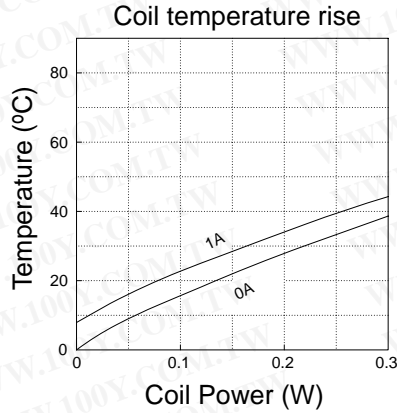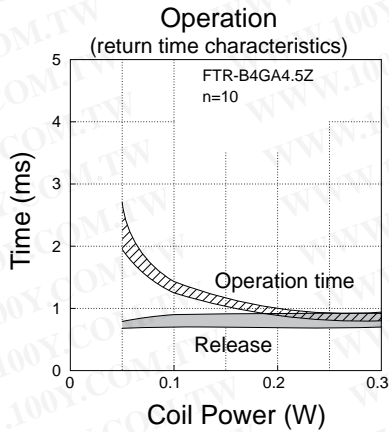

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


● Latch

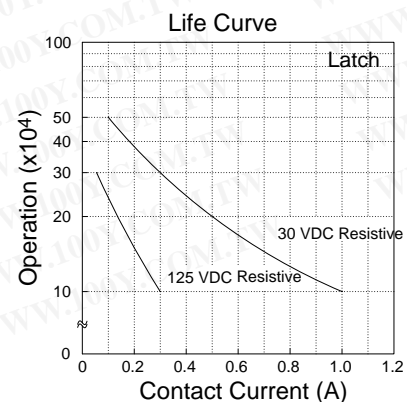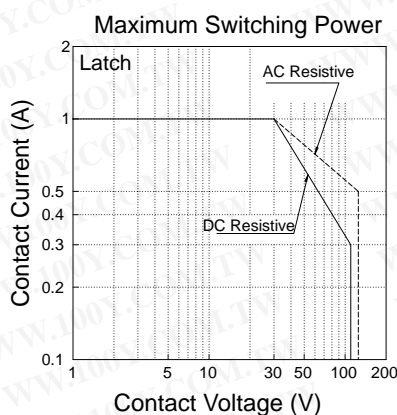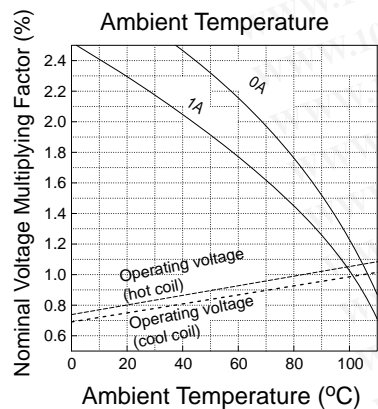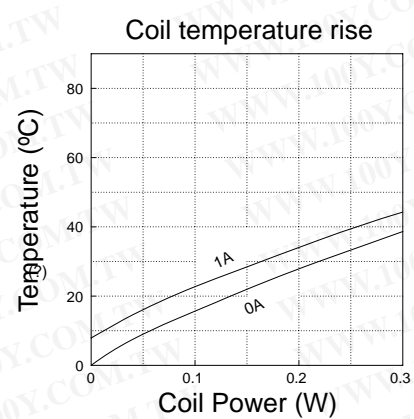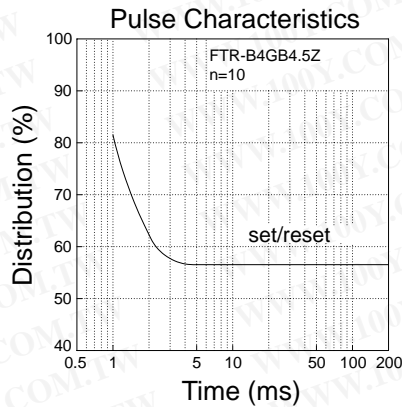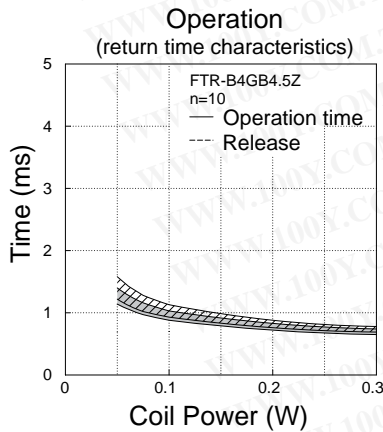


■ REFERENCE DATA

● Non-latch


Distribution of Operate and Release Voltage

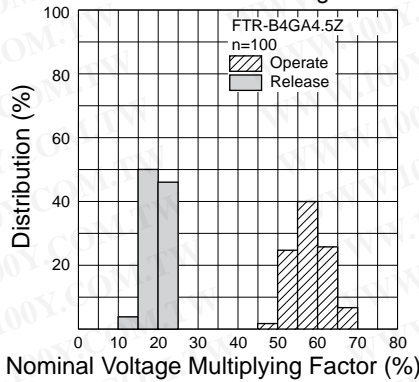


Distribution of Operate and Release Time

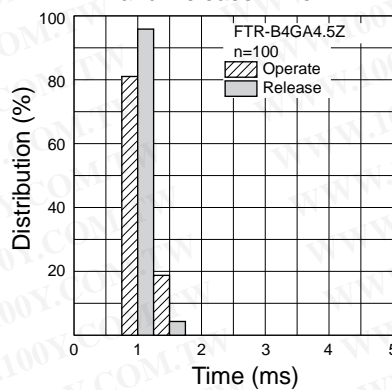


Distribution of Bounce Time

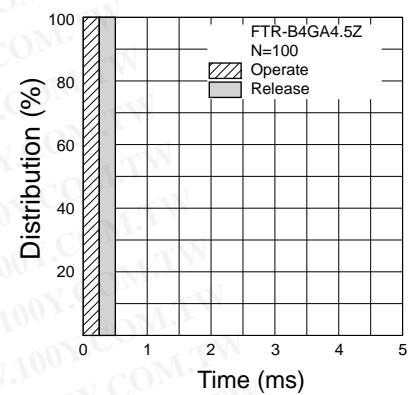


Distribution of contact resistance

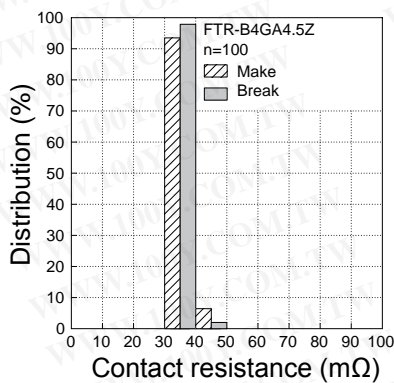

High Frequency Characteristics

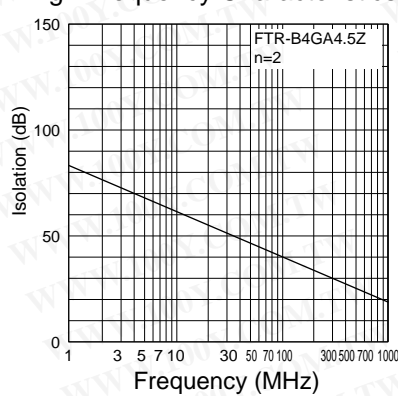


High Frequency Characteristics

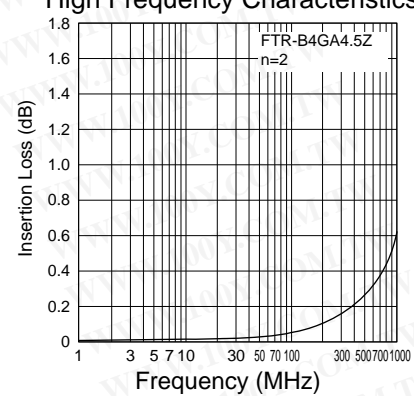


● Latch


Distribution of Operate and Release Voltage

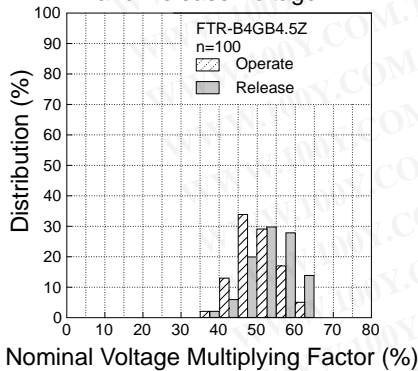


Distribution of Bounce Time

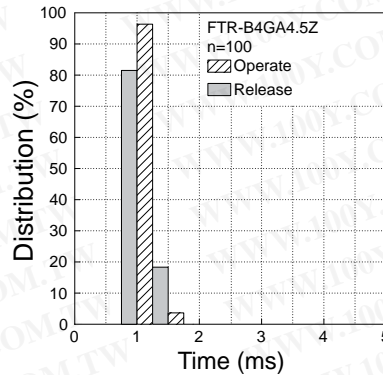


Distribution of Bounce Time

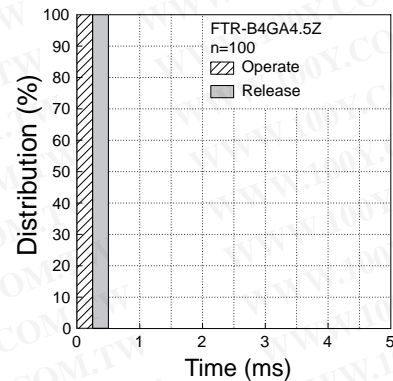


Distribution of contact resistance

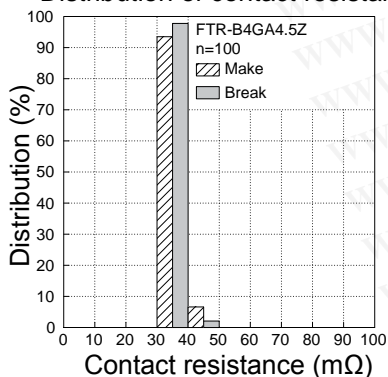

High Frequency Characteristics

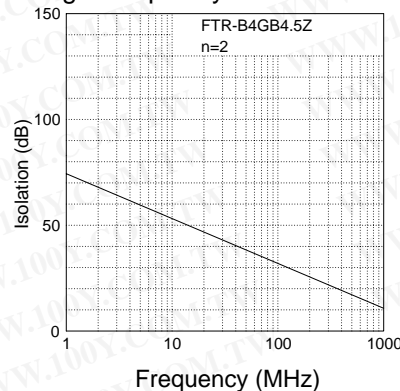


High Frequency Characteristics

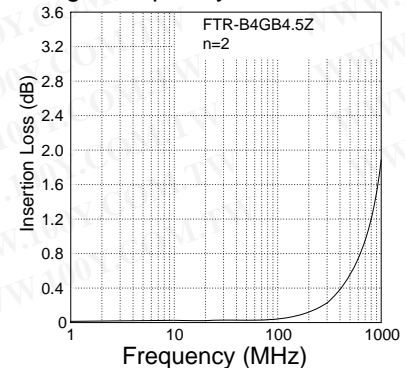

FTR-B4 Series

■ DIMENSIONS AND SCHEMATICS


Through hole type

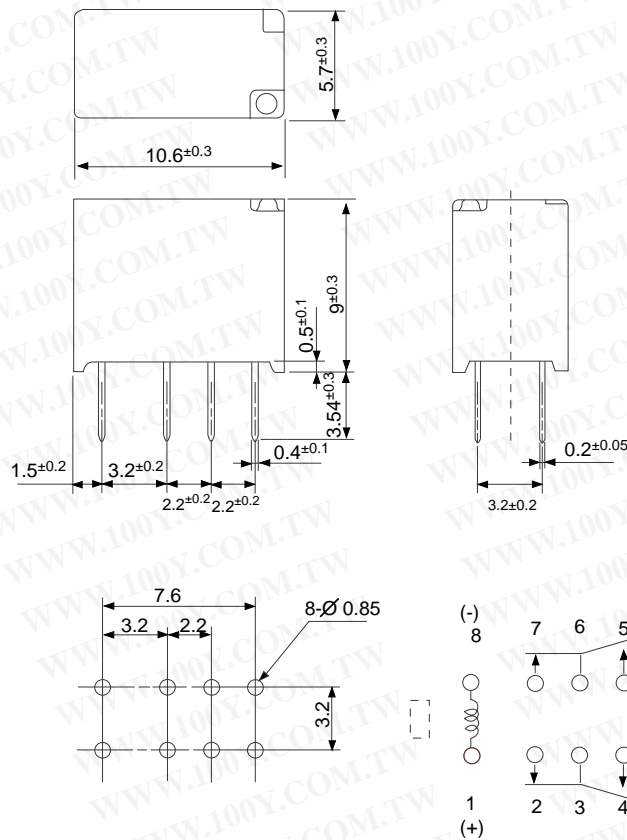

Recommended mounting pad
(Tolerance: ± 0.1 mm)

Terminal designations
(Top view de-energized
position)

Surface mount type (standard)

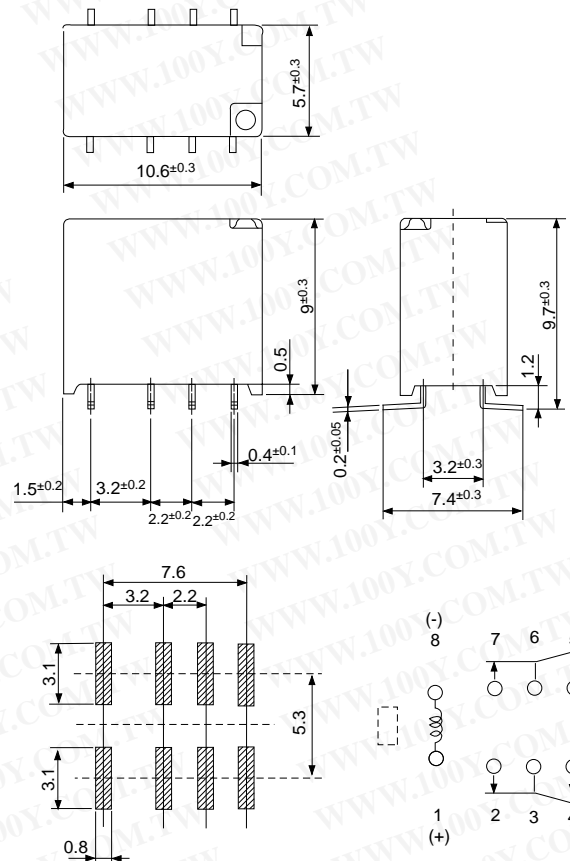


Recommended mounting pad
(Tolerance: ± 0.1 mm)

Terminal designations
(Top view de-energized
position)


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

DIMENSIONS AND SCHEMATICS

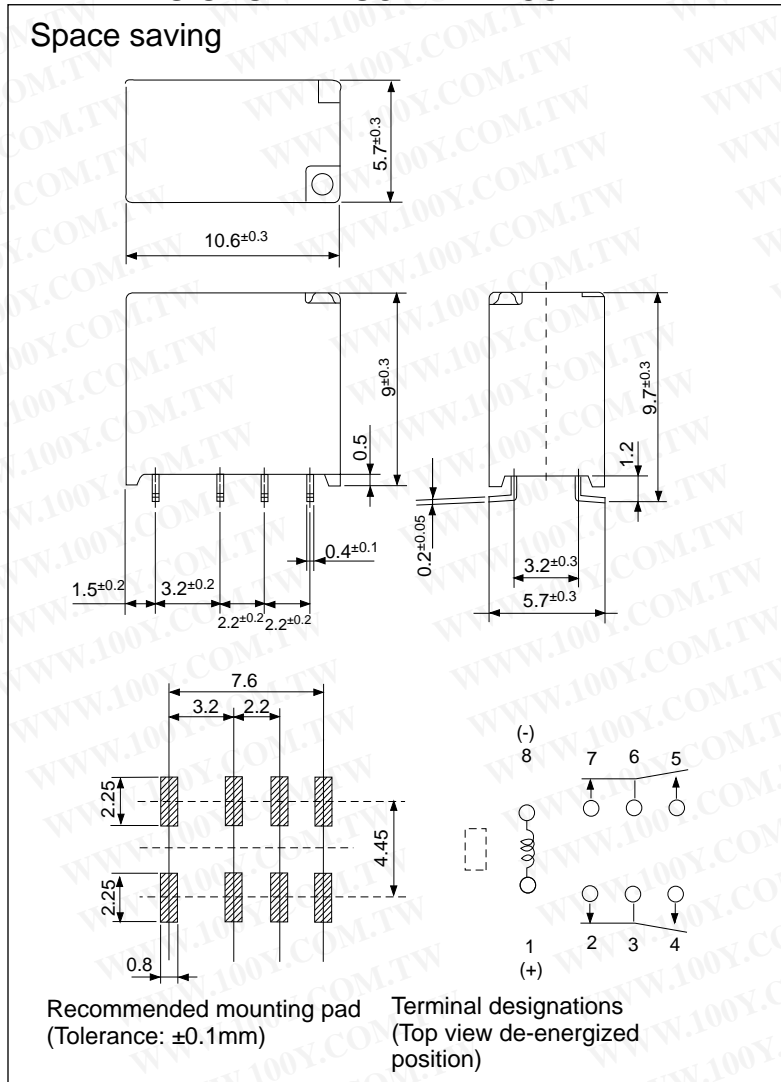

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

RECOMMENDED SOLDERING CONDITIONS (TEMPERATURE PROFILE)

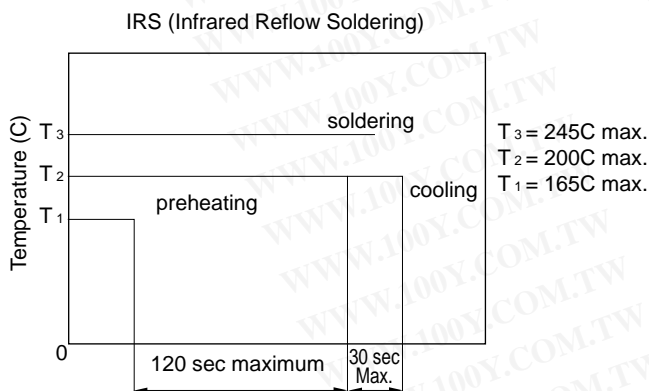

- Note:
1. Temperature profiles show the temperature of PC board surface.
 2. Please perform soldering test with your actual PC board before mass production, since the temperatures of PC board surfaces vary according to the size of PC board, status of parts mount and heating method.

PRECAUTIONS

- For details on general precautions, refer to the section on technical descriptions.
- Since this is a polar relay, follow the instructions of the internal wiring diagram for the +- connections of the coil.
- Note that the terminal array and internal wiring of the surface mount relay are a top view.

RoHS Compliance and Lead Free Relay Information

1. General Information


- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. All of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu. From February 2005 forward Sn-3.0Cu-Ni will be used for the FTR-B3 and FTR-B4 series relays.
- All signal and power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in lead assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
 - We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu and Sn-3.0 Cu-Ni (only FTR-B3 and FTR-B4 from February 2005).

Reflow Solder condition

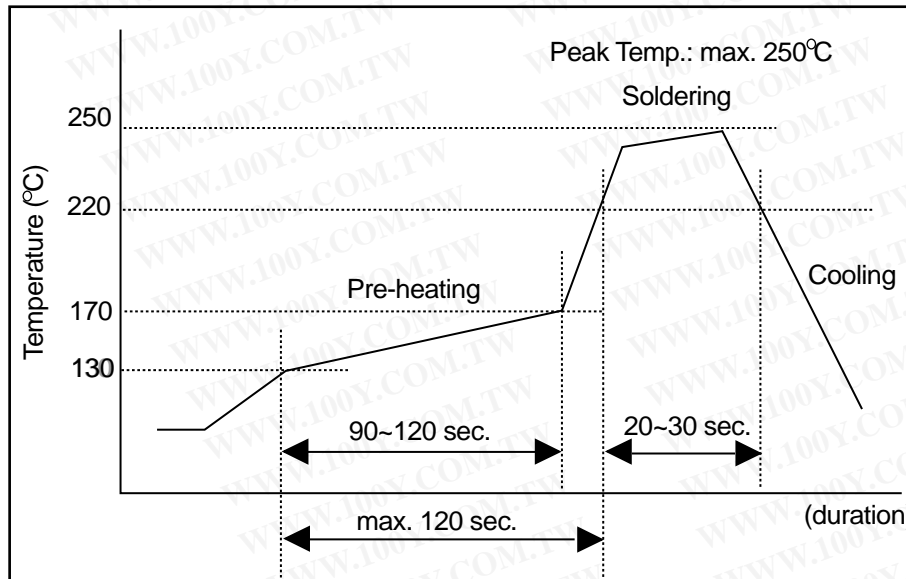

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at 260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

4. Tin Whisker

- SnAgCu and SnCuNi solder is known as low risk of tin whisker. No considerable length whisker was found by our in-house test.

FTR-B4 Series

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/relays/>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcsl@fcsl.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2008 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. February 4, 2008

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)