





## RCA插板&amp;焊線式母座

[詳細產品規格請點擊www.100y.com.tw](http://www.100y.com.tw)



Part No.	Product No.	說明	Color	材質
3819	KY-006-1Y-L	插板式 90°RCA 插座	黃色	鍍錫



## Specification

- Contact Resistance: 30m Ohm Max. At AC 100mA Max. 1KHz
- Insulation Resistance: 100M Ohm Min. At 500V DC
- Rated Voltage And Current: DC 12V, 2A Max
- Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute
- Durability(Life Test): 4000 Cycles


Part No.	Product No.	說明	Color	材質	重量
11498	RJ-1515-1(B)	RCA 插板式插座 黑色 90°	黑色	鍍錫	2.1g
11497	RJ-1515-1R	RCA 插板式插座 紅色 90°	紅色	鍍錫	2g
29056	RJ-1515-1W	RCA 插板式插座 白色 90°	白色	鍍錫	2g
29055	RJ-1515-1Y-L	RCA 插板式插座 黃色 90°	黃色	鍍錫	2g



## Specification

- Contact Resistance: 30m Ohm. Max. At AC 100mA Max. 1KHz
- Insulation Resistance: 100M Ohm Min. At 500V DC
- Rated Voltage And Current: DC 12V, 2A Max; AC 100V, 1A Max
- Dielectric Withstanding Voltage: 500VAC At 60Hz for 1 Minute
- Durability(Life Test): 4000 Cycles

Part No.	Product No.	說明	Color	材質	重量
12184	RJ-3313G	RCA 鍍金直立插板式 2*1 插座	紅.黑色	鍍金	0.64Kg/100pcs




## Specification

- Contact Resistance: 30m Ohm. Max. At AC 100mA Max. 1KHz
- Insulation Resistance: 100M Ohm Min. At 500V DC
- Rated Voltage And Current: DC 12V, 2A Max; AC 100V, 1A Max
- Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute
- Durability(Life Test): 4000 Cycles

Part No.	Product No.	說明	Color	材質
12884	RL-1416-2	RCA 直立插板式 2*1 插座	紅.白	鍍錫



Part No.	Product No.	說明	Color	材質
20924	RL-1416-2G(W/R)	RCA 直立插板式 2*1 插座	紅.白	鍍金
20925	RL-1416-2G(Y/Y)	RCA 直立插板式 2*1 插座	黃.黃	鍍金

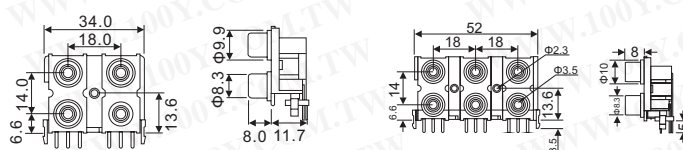

Part No.	Product No.	說明	Color	材質
39185	RL-1418-4G	RCA 插板式 2*2 插座	紅色.白色	鍍半金
8515	RL-1418-6G	RCA 插板式 2*3 插座	紅色.白色	鍍半金



Part No.	Product No.	說明	Color	材質
20926	RL-1418-6G(R/BL/G)	RCA 插板式 2*3 插座	左紅/中藍/右綠	鍍金

● 假如您需要適合特殊用途的產品或更詳細的技術資料，我們的業務專員將會透過電話，傳真，E-mail幫助您

