



d.c.電源座- 焊線式


詳細產品規格-請點擊www.100y.com.tw




- Housing: Thermoplastic
- Center pin: Nickel plating
- Terminal: Brass / Copper alloy

- Rating: 2A 16VDC
- Withstanding voltage: AC 500V, 60Hz for 1 minute
- Insulation resistance(initial): 100MΩ(min.) At 500VDC
- Contact resistance(initial): 30mΩ(max). At AC 100mA(max) 1KHz

Part No.	Product No.	說明	Pin Size
19769	2052	DC 公座	φ 2.1mm




Part No.	Product No.	說明	Pin Size	重量
8081	2084A	DC 固定座	φ 2.1mm	3g
8082	2084B	DC 固定座	φ 2.5mm	3.1g

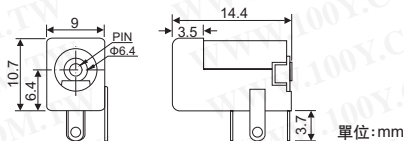

- Contact resistance: 30m ohm. Max. At AC 100Ma max. 1KHz
- Insulation resistance: 100M ohm min. At 500VDC
- Rating: DC 12V, 2A max; AC 100V, 1A max
- Dielectric withstanding voltage: 500V AC(rms) for 1 minute

Part No.	Product No.	說明	Pin Size	重量
3820	KD-014-L	MIC 音訊接公頭 DC 座	φ 2.0mm	1.8g
3797	KD-014A-L	MIC 音訊接公頭 DC 座	φ 2.5mm	1.9g



- Specification**
 Contact resistance:30m ohm. Max. At AC 100mA max. 1KHz
 Insulation resistance: 100M ohm min. At 500VDC
 Rating: DC 12V, 2A max; AC 100V, 1A max
 Dielectric withstanding voltage: 500V AC(rms) for 1 minute

Part No.	Product No.	說明	Pin Size
3821	KD-015	DC 公座	φ 2.0mm
3796	KD-015A	DC 公座	φ 2.5mm

各型Jack的D.C.轉換線/頭

詳細產品規格-請點擊www.100y.com.tw



Part No.	Product No.	說明	重量
40343	*AMP02E*	轉接頭直行 4*1.75 (180°)	1.9g



Part No.	Product No.	說明
48348	0.7 轉接頭直行	轉接頭直行 0.7*2.35 (180°)



國際DC線 長度6尺 DC插頭尺寸: 1.75*4

Part No.	Product No.	說明	Length
8348	0048H	國際 DC 線 1.75*4/6 尺(吊卡)	6 尺



- 適用線材: 2468 22-28#
- PLG: 2.5*5.5
- 線材溫度: 90°C
- 電壓: AC 65V/2Sec 電流: 6MA/SEC
- 絕緣阻抗: 100MΩ, DC500V/SEC
- 導道阻抗: 3Ω

Part No.	Product No.	說明	Length
8349	0197BN	0.7*2.35 隨身聽 DC 線(無吊卡)	6 尺



Part No.	Product No.	說明	Length
5905	0200B	1.7*4.75mm 隨身聽 DC 線-吊卡	6 尺

