




2.54mm 單/雙/三排 排針

詳細產品規格請點擊www.100y.com.tw



- 絕緣體：30% Glass filled PBT UL94V-0
- 接點腳座：Brass
- 鍍層：Gold plated
- 額定電流：1 Amp
- 絕緣電阻：5000MΩ Min. At DC 500V
- 接點電阻：20mΩ Max. At DC 100mA


- Up(mm): 6
- Down(mm): 3.3



Part No.	Product No.	說明	Angle	排*Pins	Up(mm)	Down(mm)	全長(mm)
7779	D14-80P	2.54mm 雙排排針	90°	2*40	6	3.3	13.2





Part No.	Product No.	說明	Angle	排*Pins	Up(mm)	全長(mm)
48915	D15-15F3	P:2.54mm 三排排針	180°	3*5	6	11.6

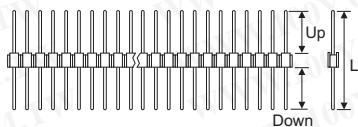


	Up	Down	L
D15-40A1S	6	6	14.5
D15-40P/18MM/等長	7.8	7.8	18

Part No.	Product No.	說明	Angle	排*Pins	Up(mm)	Down(mm)	全長(mm)	重量
1940	D15-40A1S	2.54mm 單排排針	180°	1*40	6	6	14.5	2.6G
4686	D15-40P/18MM/等長	2.54mm 單排排針	180°	1*40	7.8	7.8	18	3.15g




	Up	Down	L
D15-40P/14.2MM	8.6	3.3	14.2
D15-40P/18MM	12.8	3.3	18.0

Part No.	Product No.	說明	Angle	排*Pins	Up(mm)	Down(mm)	全長(mm)	重量
7778	D15-40P/14.2MM	2.54mm 單排排針	180°	1*40	8.6	3.3	14.2	2.6G
3769	D15-40P/18MM	2.54mm 單排排針	180°	1*40	12.8	3.3	18.0	3.1g




- Insulator: 30% Glass filled PBT UL94V-0
- Contact Pin: Brass
- Plated: Gold plated, Tin plated

Part No.	Product No.	說明	Angle	排*Pins	Up(mm)	Down(mm)	全長(mm)
3473	D15-80P/18MM	2.54mm 雙排排針	180°	2*40	12.8	3.3	18





- Insulator: 30% Glass filled PBT UL94V-0
- Contact Pin: Brass
- Plated: Gold plated

Part No.	Product No.	說明	Angle	排*Pins	Up(mm)	Down(mm)	全長(mm)
11297	D15-80P/18MM/等長	2.54mm 雙排排針	180°	2*40	7.8	7.8	18



- Insulator: 30% Glass fiber PBT
- Contact Pin: Brass

Part No.	Product No.	說明	Angle	排*Pins	Up(mm)	Down(mm)	全長(mm)
11540	PHS3-40*3-254-3-6	2.54mm 三排排針	180°	3*40	6	3	11



- Insulator: 30% Glass fiber PBT
- Contact Pin: Brass

Part No.	Product No.	說明	Angle	排*Pins	Up(mm)	Down(mm)	全長(mm)
11627	PHS3-40GB106	2.54mm 三排排針	180°	3*40	8	8	18

