




探針





詳細產品規格-請點擊www.100y.com.tw

- 針軸：鍍銻
- 內管：磷青銅鍍金
- 彈簧：琴鋼線鍍金
- 外管：磷青銅鍍金

| 最小中心距 Min.Center | 最大行程 Full Stroke | 行程全壓彈力(±20%) Full Stroke Spring Force(±20%) | 額定電流 Current Rating | 接觸電阻 Contact Resistance |
|---------------------|---------------------|--|------------------------|----------------------------|
| 0.9mm[0.0354] | 2.0mm[0.0787] | 60g[2.11oz] | 1A | 150mΩ |




| Part No. | Product No. | 說明 |
|----------|----------------------------|----|
| 10742 | P-048BS-0606/PR-048VS-D360 | 探針 |

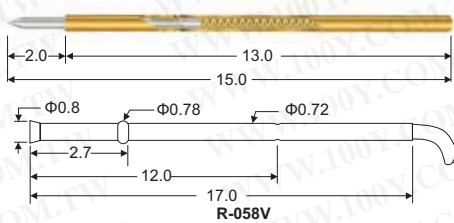

- 針軸：鍍銻或碳工具鋼鍍金
- 內管：鍍銅或磷青銅鍍金
- 彈簧：琴鋼線鍍金
- 外管：磷青銅鍍金

| 最小中心距 Min.Center | 最大行程 Full Stroke | 行程全壓彈力(±20%) Full Stroke Spring Force(±20%) | 額定電流 Current Rating | 接觸電阻 Contact Resistance |
|---------------------|---------------------|--|------------------------|----------------------------|
| 1.0mm[0.0394] | 2.0mm[0.0787] | 60g[2.11oz] | 1A | 120mΩ |

| Part No. | Product No. | 說明 | 最小間距 | 行程 | 彈力 | 額定電流 | 接觸電阻 | 全長 |
|----------|-------------|----|-------|-------|-----|------|---------|----|
| 54641 | P-058F3 | 探針 | 1.0mm | 2.0mm | 60g | 1A | 120 毫歐姆 | 15 |
| 54639 | R-058V | 套管 | 1.0mm | 2.0mm | 60g | 1.5A | 120 毫歐姆 | 17 |

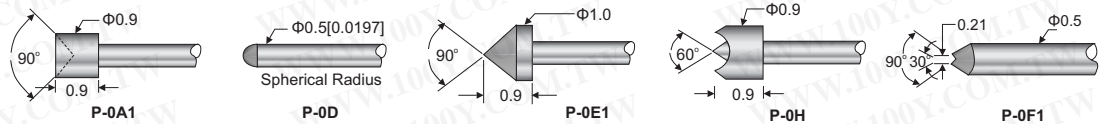

- 針軸：鍍銅或碳工具鋼鍍銻
- 內管：磷青銅鍍金
- 彈簧：琴鋼線鍍金
- 外管：磷青銅鍍金


| 最小中心距 Min.Center | 最大行程 Full Stroke | 行程全壓彈力(±20%) Full Stroke Spring Force(±20%) | 額定電流 Current Rating | 接觸電阻 Contact Resistance |
|---------------------|---------------------|--|------------------------|----------------------------|
| 1.27mm[0.05] | 3.35mm[0.1319] | 100g[3.54oz] | 1.5A | 70mΩ |

| Part No. | Product No. | 說明 | 最小間距 | 行程 | 彈力 | 額定電流 | 接觸電阻 |
|----------|-------------|----|--------|---------------|--------|------|------------|
| 47639 | P-0D | 探針 | 1.27mm | 3.35mm | | 1.5A | 70 毫歐 |
| 54017 | P-0A1 | 探針 | 1.27mm | 2.65mm | 120gms | 3A | 50milliohm |
| 54016 | P-0E1 | 探針 | 1.27mm | 2.65mm | 120gms | 3A | 50milliohm |
| 54640 | P-0F1 | 探針 | 1.27mm | 3.35mm/2.65mm | 100g | 1.5A | 70 毫歐姆 |
| 12501 | P-0H-0612 | 探針 | 1.27mm | 2.65mm | 120gms | 3A | 50milliohm |



- 針軸：鍍銅或碳工具鋼鍍銻
- 內管：磷青銅鍍金
- 彈簧：不銹鋼
- 外管：磷青銅鍍金


| 最小中心距 Min.Center | 最大行程 Full Stroke | 行程全壓彈力(±20%) Full Stroke Spring Force(±20%) | 額定電流 Current Rating | 接觸電阻 Contact Resistance |
|---------------------|---------------------|--|------------------------|----------------------------|
| 1.9mm[0.0748] | 3.35mm[0.1319] | 128g[4.52oz] | 3A | 30mΩ |



| Part No. | Product No. | 說明 | 最小間距 | 行程 | 額定電流 | 接觸電阻 |
|----------|-------------|----|-------|--------|------|-------|
| 47637 | P-1A1 | 探針 | 1.9mm | 3.35mm | 3A | 30 毫歐 |
| 54116 | P-1E2 | 探針 | 1.9mm | 3.35mm | 3A | 30 毫歐 |



- 針管：黃銅管鍍金
- 彈簧：不銹鋼線
- 套管：黃銅管鍍金
- 鑽孔尺寸：2.75mm
- 額定電流：5安培
- 接觸電阻：50毫歐姆
- 接觸彈力：(50g)(200g)(250g)(280g)(380g)
- 括號內為定制品
- 最小測試間距：3.96mm



| Part No. | Product No. | 說明 | 鑽孔尺寸 | 行程 | 彈力 | 額定電流 | 全長 | 尾端直徑 |
|----------|-------------|-----------|--------|-------|------------|------|---------|--------|
| 37345 | P156-H | P156 系列探針 | 2.75MM | 0.8MM | 250g(380g) | 5A | 33.35MM | 2.36MM |

