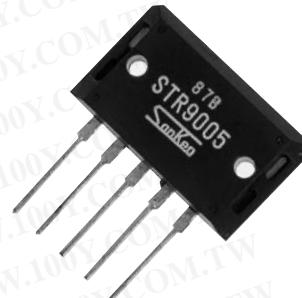


STR9000 Series**5-Terminal, Low Dropout Voltage Dropper Type****■Features**

- 5-terminal regulator with two screw mount package
- Output current: 4.0A
- Low dropout voltage : $V_{DIF} \leq 1V$ (at $I_o=4A$)
- Fine adjustment of output voltage
- Output ON/OFF control
- Built-in foldback overcurrent protection circuits

■Applications

- For stabilization of the secondary stage of switching power supplies
- Electronic equipment

**■Absolute Maximum Ratings**

Parameter	Symbol	Ratings			Unit
		STR9005	STR9012/9015		
DC Input Voltage	V_{IN}	25		30	V
DC Output Current	I_o		4.0		V
Power Dissipation	P_{D1}	$75(T_c=25^\circ C)$			W
	P_{D2}	3.2 (Without heatsink, stand-alone operation)			W
Junction Temperature	T_j	-30 to +125			°C
Ambient Operating Temperature	T_{op}	-20 to +100			°C
Storage Temperature	T_{stg}	-30 to +125			°C
Thermal Resistance (junction to case)	$R_{th(j-c)}$	1.25			°C/W



■Electrical Characteristics

Parameter	Symbol	Ratings								(Ta=25°C)	
		STR9005			STR9012			STR9015			
		min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	
Input Voltage	V_{IN}	6		15	13		25	16		25	V
Output Voltage	V_o	4.9	5.0	5.1	11.8	12.0	12.2	14.8	15.0	15.2	V
	Conditions	$V_{IN}=8V, I_o=2.0A$			$V_{IN}=16V, I_o=2.0A$			$V_{IN}=20V, I_o=2.0A$			V
Dropout Voltage	V_{DIF}			0.5			0.5			0.5	V
	Conditions	$I_o=2.0A$									V
	Conditions			1.0			1.0			1.0	V
Line Regulation	ΔV_{OLINE}		10	30		30	80		50	100	mV
	Conditions	$V_{IN}=6$ to $15V, I_o=2.0A$			$V_{IN}=13$ to $25V, I_o=2.0A$			$V_{IN}=16$ to $25V, I_o=2.0A$			mV
Load Regulation	ΔV_{OLOAD}		40	100		80	200		100	200	mV
	Conditions	$V_{IN}=8V, I_o=0$ to $3.0A$			$V_{IN}=16V, I_o=0$ to $3.0A$			$V_{IN}=20V, I_o=0$ to $3.0A$			mV
Temperature Coefficient of Output Voltage	$\Delta V_o/\Delta T_a$		± 0.5			± 1.5			± 1.5		mV/°C
Ripple Rejection	R_{REJ}		54			54			54		dB
	Conditions	$f=100$ to $120Hz$									dB
Overcurrent Protection	I_{S1}	4.1			4.1			4.1			A
	Conditions	$V_{IN}=8V$			$V_{IN}=16V$			$V_{IN}=20V$			A
Starting Current	$V_o(ON)$			0.6			0.6			0.6	V
	$V_o(OFF)$	2.0			2.0			2.0			V
Voltage with Output Off	V_o			0.5			0.5			0.5	V
	Conditions	$V_{IN}=8V, I_o=0A$			$V_{IN}=15V, I_o=0A$			$V_{IN}=20V, I_o=0A$			V


*Output is turned on when voltage between terminal No.3 and 5 is less than 0.6V, and turned off if more than 2.0V.

■Outline Drawing

(unit:mm)

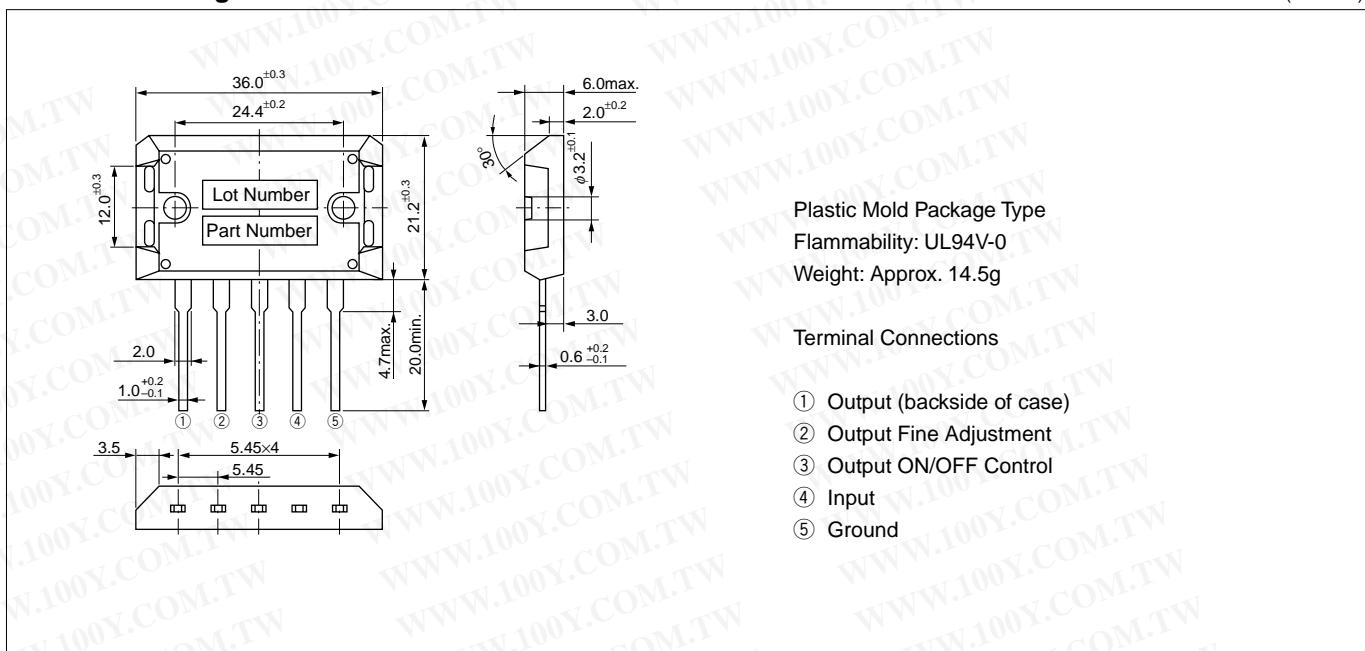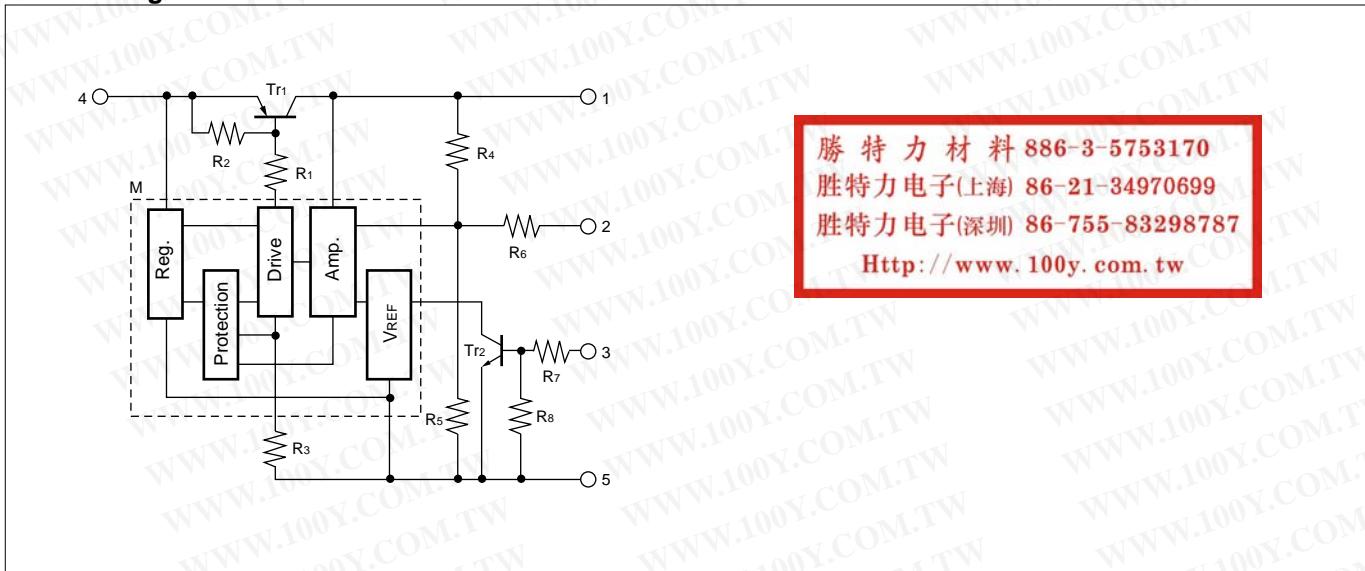**■Block Diagram**

■Standard External Circuit

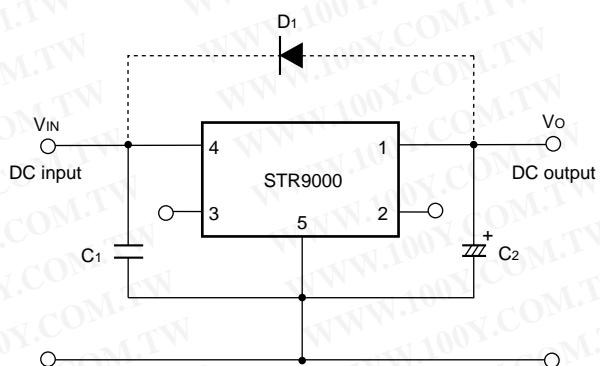

C1: Oscillation prevention capacitor (approx. 0.33μF)
Connection to terminal No.4 must be made as short as possible.

C2: Output capacitor (47 to 100μF)
Connection to terminal No.1 must be made as short as possible.


D1: Protection diode (RM1Z)
Required for protection against reverse biasing of input and output.

Note 1: Prevention of oscillation at low temperatures

At low temperatures, oscillation may occur unless an output capacitor with good tanδ is used. Be sure to connect a tantalum capacitor (approx. 10μF) in parallel with output capacitor C2.

Note 2: An isolation type diode is provided from input to ground and also from output to ground. These may be destroyed if the device is reverse biased. In this case, use a diode with low VF to protect them.

■Ta-Pd Characteristics

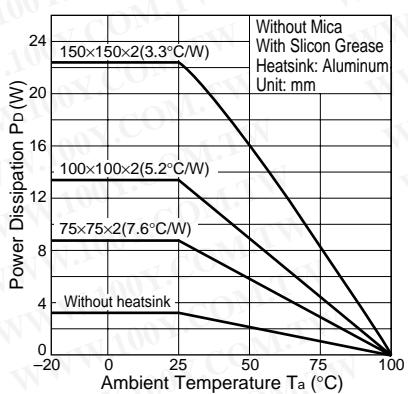


勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

External Variable Output Voltage Circuit

1. Variable output voltage with a single external resistor

The output voltage of the STR9000 series may be decreased by inserting a resistor between terminals No.1 (output terminal) and No.2 (output fine adjustment terminals). Alternatively, the output voltage may be increased by inserting a resistor between terminals No.2 and No.5 (ground terminal).


<Standard External Circuit>

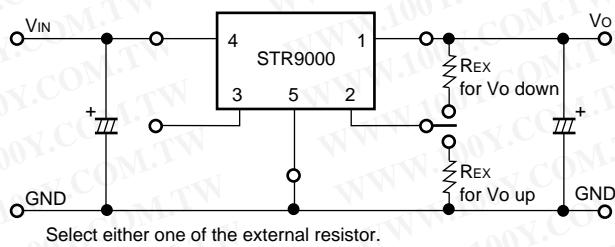

2. Fine adjustment of output voltage




The output voltage may be finely adjusted by using terminals No.1, No.2 and No. 5 as shown in the following connections.

<Standard External Circuit>

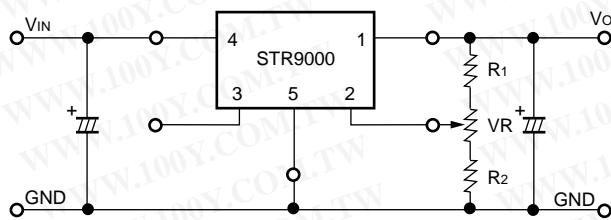




Note: The fine adjustment range of output voltage for the STR9000 series is $\pm 0.5V$ max for STR9012 and $+1.0V/-2.0V$ max for STR9015. Adjustment exceeding these values may cause start-up errors.

① Typical Characteristics of Variable Output Voltage

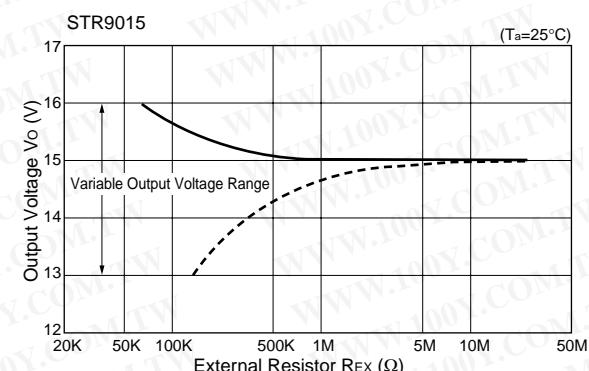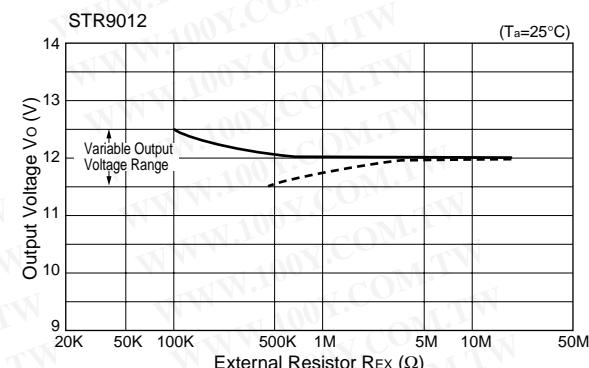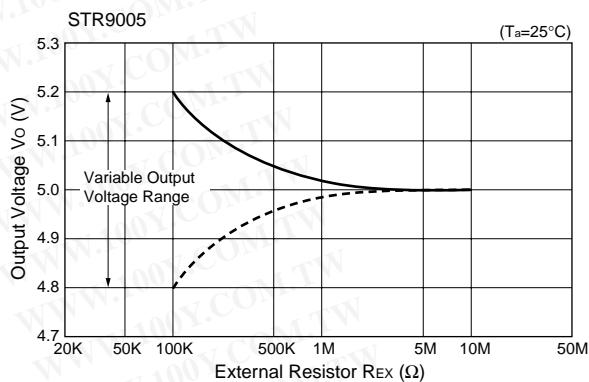

— : Insertion of resistor between terminals No. 2 and No. 5
--- : Insertion of resistor between terminals No. 2 and No. 1

② Typical Characteristics of Fine Output Voltage Adjustment







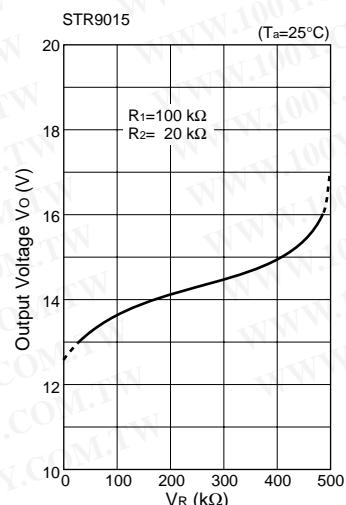
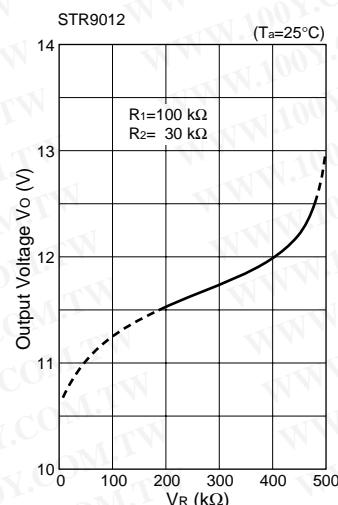
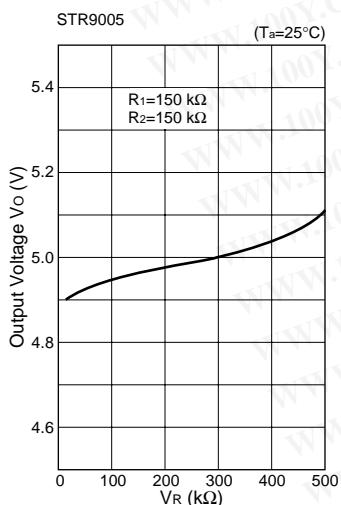


勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

■Typical Characteristics

($T_a=25^\circ\text{C}$)

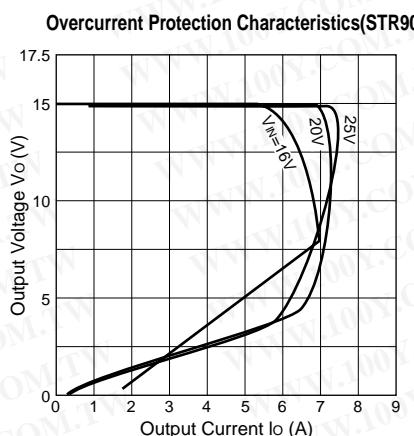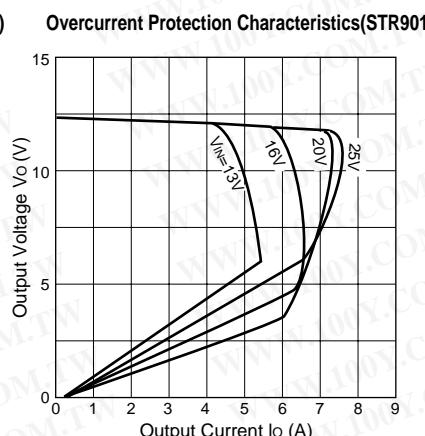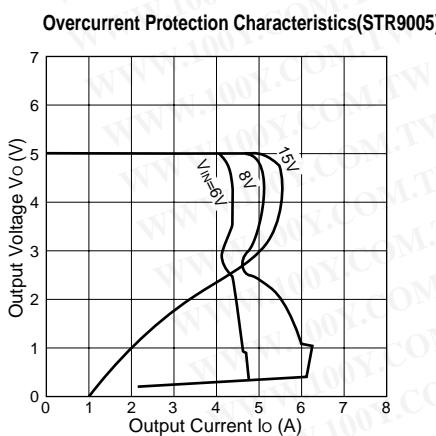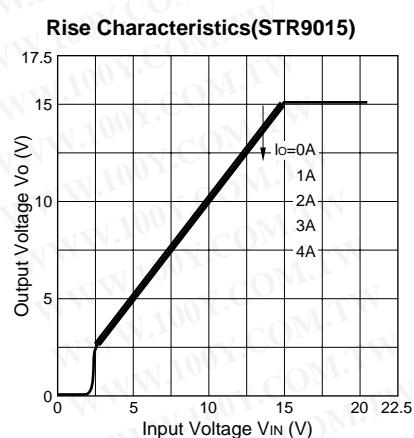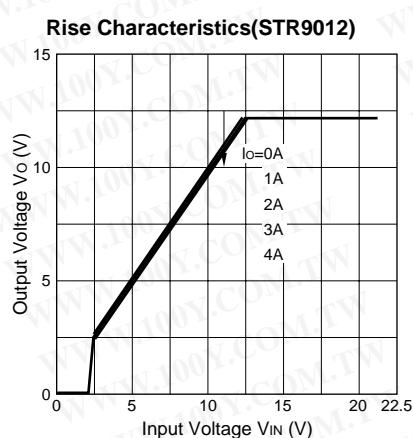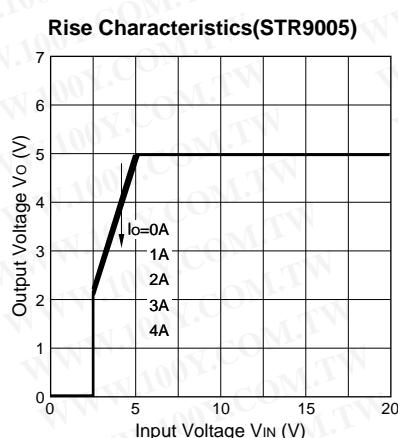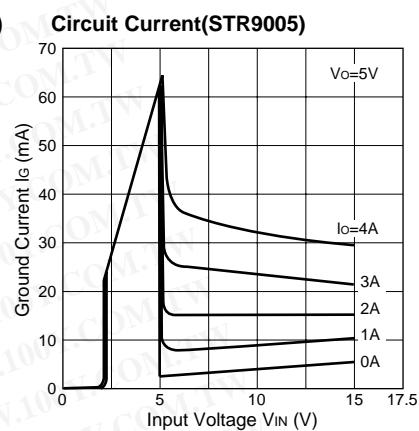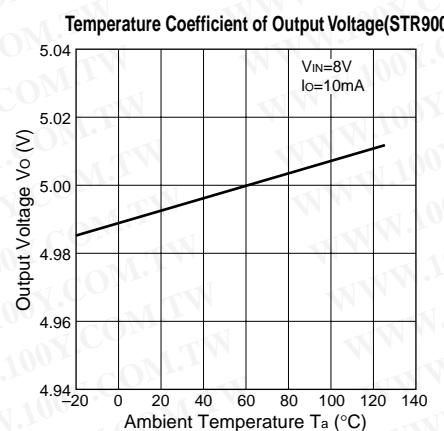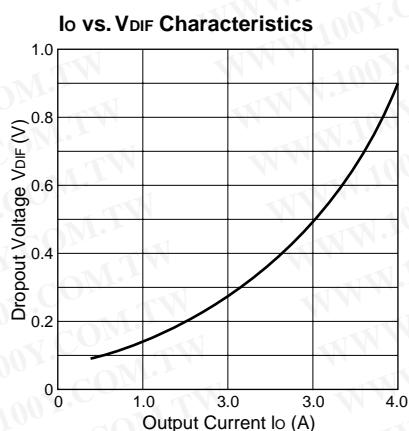

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)