

FUSES & CIRCUIT PROTECTION

Shocksafecasing
Vibration resistant
Specifications
Materials
Base/cap: BrownThermoplastic
PolyamidePA6.6,UL94V0
RoundPins:Copperalloy,tinplated
OperatingTemperature
-40 to +85 (considerde-rating)

ClimaticCategory
-25 /+70 /21days(IEC60068-2-1..3)
StockConditions
+10 to+60
relativehumidity 75%yearlyaverage,
withoutdew,maximumvalue for30days-95%
VibrationResistance
24cyclesat15min.each(IEC60068-2-6)
10-60Hzat0.75mmamplitude


詳細產品規格--請點擊www.100y.com.tw

60-2000Hzat10gacceleration
LeadPullStrength
10N(IEC60068-2-21)
Solderability
260 , 3sec.(Wave)
350 , 1sec.(Hand)
Solderability
260 , 10sec.(IEC60068-2-20)
UnitWeight
0.60g(approx.)



| PartNo. | ProductNo. | Manuf. | Description | 安規 | Amps mA/A | Volt |
|---------|-----------------|----------|-------------|---------------------|------------|------|
| 17544 | TE5-T-392-3.15A | Wickmann | 插板式保險絲 | IEC 60123-3 (歐規) | 3.15A | 250V |
| 17288 | TE5-T-396-0.2A | Wickmann | 插板式保險絲 | UL248-14(美規) | 200mA/0.2A | 125V |
| 27047 | TE5-T-396-1.25A | Wickmann | 插板式保險絲 | UL248-14(美規) | 1.25A | 125V |
| 27048 | TE5-T-396-1.60A | Wickmann | 插板式保險絲 | UL248-14(美規) | 1.60A | 125V |
| 17287 | TE5-T-396-1.6A | Wickmann | 插板式保險絲 | UL248-14(美規) | 1.6A | 125V |
| 27036 | TE5-T-396-100mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 100mA | 125V |
| 27037 | TE5-T-396-125mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 125mA | 125V |
| 27038 | TE5-T-396-160mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 160mA | 125V |
| 9914 | TE5-T-396-1A | Wickmann | 插板式保險絲 | UL248-14(美規) | 1 A | 125V |
| 27068 | TE5-T-396-2.50A | Wickmann | 插板式保險絲 | UL248-14(美規) | 2.50A | 125V |
| 17291 | TE5-T-396-2.5A | Wickmann | 插板式保險絲 | UL248-14,CSA,CE(美規) | 2.5A | 125V |
| 27039 | TE5-T-396-200mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 200mA | 125V |
| 27041 | TE5-T-396-250mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 250mA | 125V |
| 9876 | TE5-T-396-2A | Wickmann | 插板式保險絲 | UL248-14 | 2 A | 125V |
| 9912 | TE5-T-396-3.15A | Wickmann | 插板式保險絲 | UL 248-14(美規) | 3.15A | 125V |
| 27042 | TE5-T-396-315mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 315mA | 125V |
| 27069 | TE5-T-396-4.00A | Wickmann | 插板式保險絲 | UL248-14(美規) | 4.00A | 125V |
| 27043 | TE5-T-396-400mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 400mA | 125V |
| 24077 | TE5-T-396-4A | Wickmann | 插板式保險絲 | UL248-14 | 4 A | 125V |
| 27070 | TE5-T-396-5.00A | Wickmann | 插板式保險絲 | UL248-14(美規) | 5.00A | 125V |
| 27044 | TE5-T-396-500mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 500mA | 125V |
| 27033 | TE5-T-396-50mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 50mA | 125V |
| 9913 | TE5-T-396-6.3A | Wickmann | 插板式保險絲 | UL248-14(美規) | 6.3A | 125V |
| 27045 | TE5-T-396-630mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 630mA | 125V |
| 27034 | TE5-T-396-63mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 63mA | 125V |
| 27046 | TE5-T-396-800mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 800mA | 125V |
| 27035 | TE5-T-396-80mA | Wickmann | 插板式保險絲 | UL248-14(美規) | 80mA | 125V |

"Wickmann" MP19398系列保險絲 "Wickmann" MP19398 Fuse Series

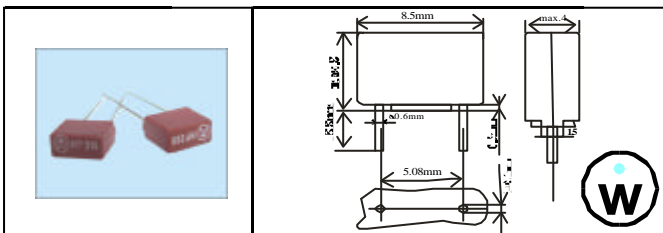

withoutdew,maximumvaluefor30 days-95%
VibrationResistance
24cyclesat15min.each(EN60068-6)
10-60Hzat0.75mmamplitude
60-2000Hzat10gacceleration
LeadPullStrength
10N(EN60068-2-21)

Solderability
260 , 3sec.(Wave)
350 , 1sec.(Hand)
SolderingHeatResistance
260 , 10sec.(IEC60068-2-20)
UnitWeight
0.60g(approx.)

ForshortCircuitProtectionofSensitive ElectronicComponentsAndAssemblies

Time-CurrentCharacteristic
MediumTimeLag(M)

Approvals

CULusRecognized
OperatingCriteria

Maximumcontinuouscurrent
C operatingmaxx^ttimelog
Maximummeltingintegral

$I^2 t_{mp} < I^2 t_{semiconductor(warm)}$

Minimumfaultcurrent
^tfault 3x^tC

Maximumfaultcurrent
^tfault 50Aat65V/ac/dc

Features

Forworldwideapplications
ReducedPCBspacerequirements

Highlydefinedcut-offtimes
Irreversiblephysicalseparation
Lowinternalresistance
Flameresistantencapsulatedcasing
Specifications

Packaging
000:Tape/Ampmpack(1400pcs.)

Materials
Base/Cap: BrownThermoplastic
PolyamidePA6.6,UL94V0
RoundPins:Copperalloy,Snplated
OperatingTemperature

-40 to+85 (considerde-rating)

ClimaticCategory
-40 to+85 /21days(EN60068-1..3)

StockConditions
+10 to+60
relativehumidity 75%yearlyaverage,

| Part No. | ProductNo. | Description | Manuf. | Amps mA/A | Volt |
|----------|------------|-------------|----------|-----------|------|
| 10206 | MP100 | 插板式保險絲 | Wickmann | 1A | 65V |
| 27094 | MP125 | 插板式保險絲 | Wickmann | 1.25A | 65V |
| 27076 | MP13 | 插板式保險絲 | Wickmann | 125mA | 65V |
| 27095 | MP160 | 插板式保險絲 | Wickmann | 1.60A | 65V |
| 10205 | MP200 | 插板式保險絲 | Wickmann | 2A | 65V |
| 27077 | MP25 | 插板式保險絲 | Wickmann | 250mA | 65V |
| 10203 | MP250 | 插板式保險絲 | Wickmann | 2.5A | 65V |
| 10207 | MP315 | 插板式保險絲 | Wickmann | 3.15A | 65V |
| 27090 | MP32 | 插板式保險絲 | Wickmann | 315mA | 65V |
| 27089 | MP40 | 插板式保險絲 | Wickmann | 400mA | 65V |
| 27096 | MP400 | 插板式保險絲 | Wickmann | 4.00A | 65V |
| 27091 | MP50 | 插板式保險絲 | Wickmann | 500mA | 65V |
| 27092 | MP63 | 插板式保險絲 | Wickmann | 630mA | 65V |
| 27093 | MP80 | 插板式保險絲 | Wickmann | 800mA | 65V |

詳細產品規格--請點擊www.100y.com.tw

