


FUSES & CIRCUIT PROTECTION

詳細產品規格--請點擊www.100y.com.tw




Interrupting Rating: 10KA
 UL Listed, STD. 248-14
 0-5A/600Vac OR LESS, 6-10A/250Vac
 (GUIDE# JDYX, FILE# E19180)
 CSA CERTIFIED, C22.2 NO. 248.14
 0-5A/600V, 6-10A/250Vac
 (CLASS# 1422-01, FILE# 53787)

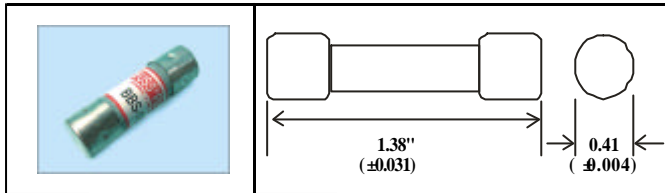


For control circuits, gaseous vapor fixture, HID ballasts; electronic circuits and hand-held meters.
 Fibre Tube.
 Nickel Plated Brass Endcaps.
 Size: 10.3*34.9mm

Part No.	Product No.	Description	IR(A)	Current(A)	Volt
10119	BBS-1	快溶保險絲	10kA	1 A	600Vac
10736	BBS-1/2	快溶保險絲	10kA	0.5A	600Vac
10120	BBS-3	快溶保險絲	10kA	3 A	600Vac
10321	BBS-4	快溶保險絲	10kA	4A	600Vac

Bussmann-FNQ/LP-CC系列保險絲 Buamann-FNQ/LP-CC Fuse Series

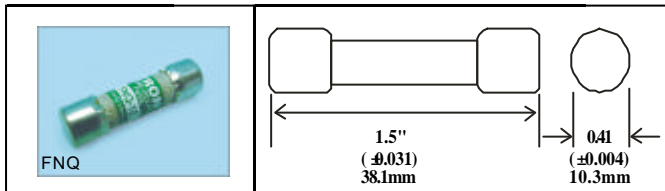


Part No.	Product No.	Manuf.	Description	IR(A)	Current(A)	Volt	Size
10039	FNQ-1	Bussmann	Time-Delay 保險絲	10,000A	1 A	500Vac	10.3*38.1mm
15400	FNQ-1/2	Bussmann	Time-Delay 保險絲	10,000A	0.5A	500V	10.3*38.1mm
2026	FNQ-10	Bussmann	Time-Delay 保險絲	10,000A	10A	500Vac	10.3*38.1mm
15132	FNQ-12	Bussmann	Time-Delay 保險絲	10,000A	10A	500Vac	10.3*38.1mm
23746	FNQ-20	Bussmann	Time-Delay 保險絲	10,000A	20A	500Vac	10.3*38.1mm
23741	FNQ-25	Bussmann	Time-Delay 保險絲	10,000A	25A	500Vac	10.3*38.1mm
10023	FNQ-4	Bussmann	Time-Delay 保險絲	10,000A	4A	500V	10.3*38.1mm
2221	FNQ-5	Bussmann	Time-Delay 保險絲	10,000A	5A	500Vac	10.3*38.1mm
10038	FNQ-6	Bussmann	Time-Delay 保險絲	10,000A	6A	500Vac	10.3*38.1mm
2223	FNQ-8	Bussmann	Time-Delay 保險絲	10,000A	8A	500Vac	10.3*38.1mm

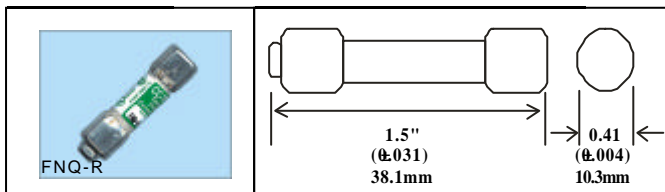

Ampere Rating: 1/4to30A
Voltage Rating: 600Vac(orless)
Interrupting Rating: 200,000 ARMSSym.(UL)
Agency Information: UL Listed, Std. 248-4, Class CC, Guide JDDZ, File E4273
 CSA Certified, Class CCCSA, Class 1422-01, File 53787 HRC-MISC
 12-30A is 300Vdc and 10kAIR.

Part No.	Product No.	Manuf.	Description	IR(A)	Current(A)	Volt	Size
26974	FNQ-R-0.25	Bussmann	可與LL-CC-0.5A替換保險絲	200,000A RMS Sym.(UL)	0.25A	600Vac	10.3*38.1mm
26975	FNQ-R-0.3	Bussmann	可與LL-CC-0.5A替換保險絲	200,000A RMS Sym.(UL)	0.3A	600Vac	10.3*38.1mm
26976	FNQ-R-0.4	Bussmann	可與LL-CC-0.5A替換保險絲	200,000A RMS Sym.(UL)	0.4A	600Vac	10.3*38.1mm
26977	FNQ-R-0.6	Bussmann	可與LL-CC-0.5A替換保險絲	200,000A RMS Sym.(UL)	0.6A	600Vac	10.3*38.1mm
26978	FNQ-R-0.75	Bussmann	可與LL-CC-0.5A替換保險絲	200,000A RMS Sym.(UL)	0.75A	600Vac	10.3*38.1mm
26979	FNQ-R-0.8	Bussmann	可與LL-CC-0.5A替換保險絲	200,000A RMS Sym.(UL)	0.8A	600Vac	10.3*38.1mm

Bussmann-FNM系列保險絲 Buamann-FNM Fuse Series

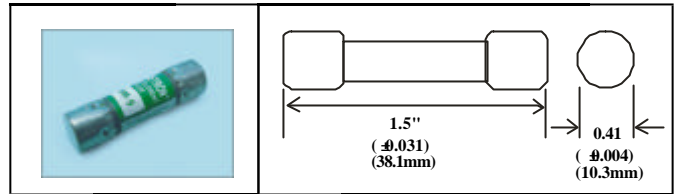

Interrupting Rating - SEE CHART BELOW
 UL Listed STD. 248-14, 0-10/250Vac; 12-15/125Vac
 FILE# E19180, GUIDE# JDYX
 CSA Certified: 1-10/250Vac; CLASS 1422-01, 12-15/125Vac; FILE 53787

Fibre tube.
 For circuits with high inrush currents. Formerly designated 5AB.
 Fusetron® Dual-Element fuse.
 Size: 10.3*38.1mm



Part No.	Product No.	Description	IR(A)	Current(A)	Volt
9865	FNM-1.4	Time-delay 保險絲	100A/250V, 10,000A/125V	1.4A	250V
9866	FNM-1.5	Time-delay 保險絲	100A/250V, 10,000A/125V	1.5A	250V
9864	FNM-1/4	Time-delay 保險絲	35A/250V, 10,000A/125V	0.25A	250V
2025	FNM-4.5	Time-delay 保險絲	200A/250V, 10,000A/125V	4.5A	250V
16475	FNM-6-1/4	Time-delay 保險絲	200A/250V, 10,000A/125V	6.25A	250V
11760	FNM-9	Time-delay 保險絲	200A/250V, 10,000A/125V	9A	250V

TronR Time-Delay Fuses
 13/32" x 1-1/2" Midget
500 Volt, 1/10-30 Amps



Fibre tube.
 Nickel plated brass endcaps.
 For motor control transformers and other circuits within-rush currents.
 Interrupting Rating: 10,000A
 UL LISTED STD 248-14, (GUIDE# JDYX, FILE# E19180)
 CSA CERTIFIED (CLASS 1422-01; FILE 53787)

Time-Delay Fuses
 13/32" X 1 1/2", 600 Volt, 1/4 to 30 Amps



General Information:
 The Bussmann CC-TRONR (FNQ-R) was designed to meet the needs of control circuit transformer protection.
 Current-limitation protects downstream components against damaging thermal and magnetic effects of short circuit currents.
High inrush time-delay. Control circuit transformers can experience inrush currents up to 85 times their full-load current rating. FNQ-R fuses can be sized according to NEC and UL requirements and still allow the high inrush currents, with significantly more time-delay than the UL minimum value of 12 seconds at 200% for Class CC fuses.
 Melamine tube. Nickel-plated brass endcaps.
Application: Circuit Transformer Protection

