


# FUSES & CIRCUIT PROTECTION

PartNo.	ProductNo.	Manuf.	Description	IR(A)	Current(A)	Volt	Size
13076	FNQ-R-1	Bussmann	可與 LP-CC-1 替換保險絲	200,000A RMS Sym. (UL)	1A	600Vac	10.3*38.1mm
26980	FNQ-R-1.125	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	1.125A	600Vac	10.3*38.1mm
26981	FNQ-R-1.25	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	1.25A	600Vac	10.3*38.1mm
26982	FNQ-R-1.3	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	1.3A	600Vac	10.3*38.1mm
26983	FNQ-R-1.4	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	1.4A	600Vac	10.3*38.1mm
26984	FNQ-R-1.5	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	1.5A	600Vac	10.3*38.1mm
26985	FNQ-R-1.6	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	1.6A	600Vac	10.3*38.1mm
26986	FNQ-R-1.8	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	1.8A	600Vac	10.3*38.1mm
2024	FNQ-R-1/2	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	0.5A	600Vac	10.3*38.1mm
27030	FNQ-R-10	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	10A	600Vac	10.3*38.1mm
27211	FNQ-R-12	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	12A	600Vac	10.3*38.1mm
27213	FNQ-R-15	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	15A	600Vac	10.3*38.1mm
27220	FNQ-R-17.5	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	17.5A	600Vac	10.3*38.1mm
26987	FNQ-R-2	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	2A	600Vac	10.3*38.1mm
26988	FNQ-R-2.25	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	2.25A	600Vac	10.3*38.1mm
26989	FNQ-R-2.5	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	2.5A	600Vac	10.3*38.1mm
26990	FNQ-R-2.8	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	2.8A	600Vac	10.3*38.1mm
27226	FNQ-R-20	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	20A	600Vac	10.3*38.1mm
27227	FNQ-R-25	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	25A	600Vac	10.3*38.1mm
27004	FNQ-R-3	Bussmann	可與 LL-CC-0.5A 替換保險絲	200,000A RMS Sym. (UL)	3A	600Vac	10.3*38.1mm
27202	FNQ-R-3.2	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	3.2A	600Vac	10.3*38.1mm
27203	FNQ-R-3.5	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	3.5A	600Vac	10.3*38.1mm
27228	FNQ-R-30	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	30A	600Vac	10.3*38.1mm
12923	FNQ-R-4	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	4A	600Vac	10.3*38.1mm
27204	FNQ-R-4.5	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	4.5A	600Vac	10.3*38.1mm
12924	FNQ-R-5	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	5A	600Vac	10.3*38.1mm
27205	FNQ-R-5.6	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	5.6A	600Vac	10.3*38.1mm
27206	FNQ-R-6	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	6A	600Vac	10.3*38.1mm
27207	FNQ-R-6.25	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	6.25A	600Vac	10.3*38.1mm
27208	FNQ-R-7	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	7A	600Vac	10.3*38.1mm
27209	FNQ-R-7.5	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	7.5A	600Vac	10.3*38.1mm
16272	FNQ-R-8	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	8A	600Vac	10.3*38.1mm
27210	FNQ-R-9	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym. (UL)	9A	600Vac	10.3*38.1mm

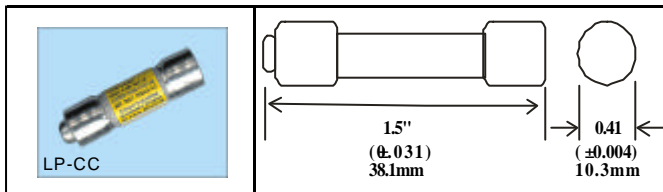

### LOW-PEAK RLP-CC Time-Delay Fuses

**Class CC 600 Volt, 1/2" to 30 Amps**

**Interrupting Rating:** 200,000 ARMSSym.

**Agency Information:**

UL Listed, Std. 248-4, Class CC, Guide JDDZ, File E4273

CSA Certified, C22.2 No. 248.4, Class 1422-02, File 53787

**DC Voltage Rating:** 300Vdc (or less)

1/2" - 28/10A and 20-30A, 20,000AIR, UL198L

150Vdc or less 3-15A, 20,000AIR, UL198L



**General Information:**

**LP-CC LOW-PEAK Yellow Fuse**

A superior all-purpose, space-saving branch circuit fuse that meets most protection requirements up to 30A.

Very compact; physical size is only 13/32" x 1 (10.3mm X 38.1mm) with reject ion tip.

The unique yellow color makes it easy to tell that the correct fuse type is installed.

Faster response to damaging short-circuit currents and higher interrupting rating than mechanical overcurrent protective devices.

**200,000A Interrupting Rating**

Maximum interrupting rating for available fault current in today's large capacity systems.

Helps ensure that future growth will not obsolete the system.

### Dual Characteristics

Time-delay to avoid unwanted fuse openings from surge currents.

Fast speed of response under short-circuit conditions for a high degree of current limitation.

**ADVANTAGE:** The LOW-PEAK fuse can be sized close to full load ratings for maximum overload and short-circuit protection.

**ADVANTAGE:** Can be used where either a time-delay or fast-acting fuse is needed, making selection easier and reducing spare fuse inventories for substantial cost reduction.

### Superior Motor Protection

For protection of small horsepower motor circuits.

Proper sizing can provide Type "2" coordinated protection for NEMA and IEC motor controllers.

Motors receive maximum protection against burnout from overloads and single phasing.

PartNo.	ProductNo.	Manuf.	Description	IR(A)	Current(A)	Volt	Size
27157	LP-CC-0.6	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym.	0.6A	600Vac	10.3*38.1mm
27159	LP-CC-0.8	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym.	0.8A	600Vac	10.3*38.1mm
13067	LP-CC-1	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym.	1A	600Vac	10.3*38.1mm
27158	LP-CC-1.125	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym.	1.125A	600Vac	10.3*38.1mm
27160	LP-CC-1.25	Bussmann	Time-Delay Class CC Current Limiting Fuse	200,000A RMS Sym.	1.25A	600Vac	10.3*38.1mm

詳細產品規格--請點擊 [www.100y.com.tw](http://www.100y.com.tw)

