


FUSES & CIRCUIT PROTECTION

Littelfuse-保險絲 Littelfuse-FLM系列保險絲 Littelfuse-FLM Fuse Series

詳細產品規格--請點擊www.100y.com.tw

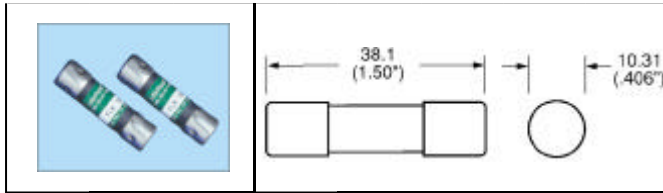

FLMFuses

TIME-DELAY 250VAC

UseFLM250volttime0delayfusetoprotectcontrolcircuittransformers,solenoids,and othercircuitswithhighinrushcurrents.Excellentforsupplementalprotectionof smallmotors.Formotor **branch-circuit** protection,SeeClassCCfuses.

VoltageRating:250VoltsAC

InterruptingRating:AC:10,000amperesrmsymmetrical.



AmpereRatings: 3A

Approvals: Standard248-14 ULListed(FileNo:E10480)CSACertified

(FileNo:LR29862)


Dimensions:13/32"X1-1/2"

Example partnumber (series&erage):FLM15

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
26850	FLM0.1	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	0.1A	250Vac	10000A
26851	FLM0.15	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	0.15A	250Vac	10000A
26852	FLM0.2	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	0.2A	250Vac	10000A
26853	FLM0.25	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	0.25A	250Vac	10000A
26854	FLM0.3	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	0.3A	250Vac	10000A
26855	FLM0.4	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	0.4A	250Vac	10000A
26856	FLM0.5	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	0.5A	250Vac	10000A
26857	FLM0.6	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	0.6A	250Vac	10000A
26858	FLM0.8	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	0.8A	250Vac	10000A
26859	FLM1	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	1.0A	250Vac	10000A
26860	FLM1.125	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	1.125A	250Vac	10000A
26861	FLM1.25	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	1.25A	250Vac	10000A
26862	FLM1.4	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	1.4A	250Vac	10000A
26863	FLM1.6	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	1.6A	250Vac	10000A
26864	FLM1.8	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	1.8A	250Vac	10000A
26880	FLM10	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	10A	250Vac	10000A
26881	FLM12	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	12A	250Vac	10000A
26882	FLM15	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	15A	250Vac	10000A
26885	FLM2	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	2A	250Vac	10000A
26886	FLM2.25	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	2.25A	250Vac	10000A
26887	FLM2.5	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	2.5A	250Vac	10000A
26888	FLM2.8	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	2.8A	250Vac	10000A
26883	FLM20	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	20A	250Vac	10000A
26884	FLM25	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	25A	250Vac	10000A
12424	FLM3	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	3A	250Vac	10000A
26869	FLM3.2	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	3.2A	250Vac	10000A
26870	FLM3.5	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	3.5A	250Vac	10000A
26885	FLM35	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	35A	250Vac	10000A
26871	FLM4	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	4A	250Vac	10000A
26872	FLM4.5	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	4.5A	250Vac	10000A
26873	FLM5	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	5A	250Vac	10000A
26874	FLM5.6	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	5.6A	250Vac	10000A
26875	FLM6	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	6A	250Vac	10000A
26876	FLM6.25	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	6.25A	250Vac	10000A
26877	FLM7	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	7A	250Vac	10000A
26878	FLM8	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	8A	250Vac	10000A
26879	FLM9	Littelfuse	慢熔陶瓷保險絲	10.3*38.1mm	9A	250Vac	10000A

Littelfuse-452/454系列保險絲 Littelfuse-452/454 Fuse Series

詳細產品規格--請點擊www.100y.com.tw

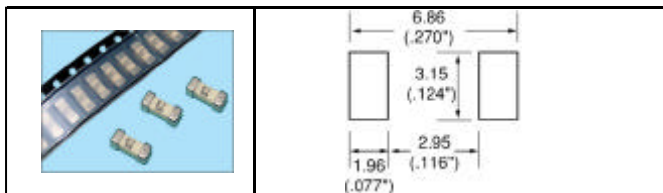

AGENCY APPROVALS Recognized under the Components Program of Underwriters Laboratories and Certified by CSA.

AGENCY FILE NUMBERS: ULE10480, CSALR29862.

INTERRUPTING RATINGS: 50 amperes at 125VAC/VD



ENVIRONMENTAL SPECIFICATIONS:

Operating Temperature: -55 to 125

Shock: MIL-STD-202, Method 213, Test Condition I (100G's peak for 6 milliseconds).

Vibration: MIL-STD-202, Method 201 (10-55Hz, .06in. total excursion).

Salt Spray: MIL-STD-202, Method 101, Test Condition B (48hrs.).

Insulation Resistance (After Opening): MIL-STD-202, Method 302, Test Condition A, (10,000ohms minimum).

ResistancetoSolderingHeat:MIL-STD-202,Method210,(3secretary.At260)

ThermalShock: MIL-STD-202,Method107,TestConditionB(-65to125).

PartNo.	ProductNo.	Manuf.	Description	Size	Volt	Current(A)
23830	R452005	Littelfuse	Slow-Blow Subminiature S surface Mount Fuse	2.1*2.69mm	125V	5A

