


# FUSES & CIRCUIT PROTECTION

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
26956	NLS70	Littelfuse	NLS-ONE-TIME保險絲	127*20.6mm	70A	600Vac/dc	50kAac/20kAac
26945	NLS8	Littelfuse	NLS-ONE-TIME保險絲	127*20.6mm	8A	600Vac/dc	50kAac/20kAac
26957	NLS80	Littelfuse	NLS-ONE-TIME保險絲	127*20.6mm	80A	600Vac/dc	50kAac/20kAac
26958	NLS90	Littelfuse	NLS-ONE-TIME保險絲	127*20.6mm	90A	600Vac/dc	50kAac/20kAac

## Littelfuse-BLF/BLN系列保險絲 Littelfuse-BLF/BLNFuseSeries

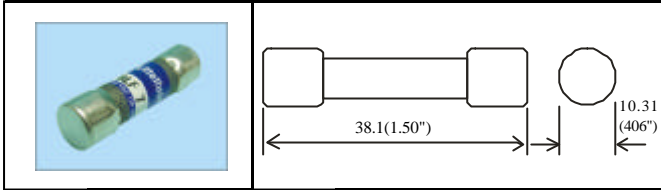

詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)

### BLF Fuses

**FAST-ACTING 125/250VAC**

Laminated tube BLF fuses are the lowest priced midget fuse. They are suitable for control circuit and instrument protection in dry locations.


**Voltage Ratings:** 250 Volts AC: 1/2 15 amperes; 125 Volts AC: 20 30 amperes  
**Interrupting Rating:** 10,000 amperes rms symmetrical

**Approvals:** Standard 248-14 ULL listed (File No: E10480) CSA Certified (File No: LR29862)

**Dimensions:** 13/32"x1-1/2"

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
14489	BLF7	Littelfuse	Fast-Acting Laminated Body Midget Fuse	38.1*10.31mm	7A	250V	10KA

## Littelfuse-2AG-229系列保險絲 Littelfuse-2AG-229FuseSeries

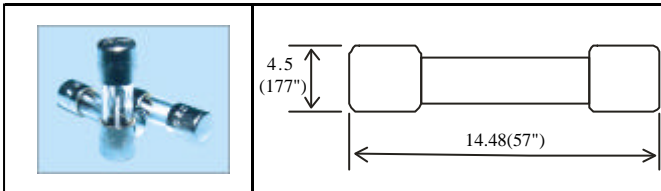

詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)


The 2AG SLO-Blo fuses are available in cartridge form or with axial leads. Axial leaded fuses are board washable. 2AG fuses provide the same performance characteristics as their 3AG counterpart, while occupying one-third the space. Sleeve fuses are available.

**AGENCY APPROVALS:** Listed by Underwriters Laboratories and Certified by CSA through 3.5 amperes. Recognized under the Components Program of Underwriters Laboratories from 4 through 7 amperes. 229004 and 229005 approved by MITI. 230001 through 230005 approved by METI.

**AGENCY FILE NUMBERS:** ULE10480, CSALR29862.

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
17081	2AG-229-0.5A	Littelfuse	慢熔玻璃管保險絲	4.5*14.5mm	0.5A	250V	10kA/125Vac
17082	2AG-229-2A	Littelfuse	慢熔保險絲	4.5*14.5mm	2A	250V	10kA/125Vac

## Littelfuse-PICO II 251/253系列保險絲 Littelfuse-PICO II 251/253FuseSeries

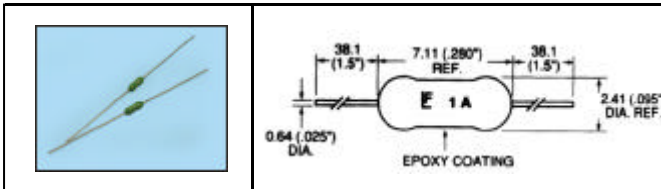

詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)

### AGENCY APPROVALS:

Recognized under the Components Program of Underwriters Laboratories and Certified by CSA. Approved by METI from 1 through 5 amperes.

**AGENCY FILE NUMBERS:** ULE10480, CSALR29862.


**REFERENCE TO MIL SPEC:** Available in FM110 on QPL for MIL-PRF-23419. To order, change 251 to 253 as shown below.

### INTERRUPTING RATINGS:

300 amperes at rated voltage VDC. 50 amperes at rated voltage VAC.

PartNo.	ProductNo.	Manuf.	Description	Size	Amp. Rating	Volt. Rating	IR(A)
24396	R251-0.125A	Littelfuse	PICO II Very Fast-Acting Subminiature Axial leaded 保險絲	2.41*7.1mm	0.125A	125V	50A/Vac300A/Vac
13018	R251-0.25A	Littelfuse	PICO II Very Fast-Acting Subminiature Axial leaded 保險絲	2.41*7.1mm	0.25A	125V	50A/Vac300A/Vac
10082	R251-0.5A	Littelfuse	PICO II Very Fast-Acting Subminiature Axial leaded 保險絲	2.41*7.1mm	0.5A	125V	50A/Vac300A/Vac
10110	R251-1.5A	Littelfuse	PICO II Very Fast-Acting Subminiature Axial leaded 保險絲	2.41*7.1mm	1.5A	125V	50A/Vac300A/Vac
13406	R251-10A	Littelfuse	PICO II Very Fast-Acting Subminiature Axial leaded 保險絲	2.41*7.1mm	10A	125V	50A/Vac300A/Vac
18064	R251-15A	Littelfuse	PICO II Very Fast-Acting Subminiature Axial leaded 保險絲	2.41*7.1mm	15A	32V	50A/Vac300A/Vac
11190	R251-1A	Littelfuse	PICO II Very Fast-Acting Subminiature Axial leaded 保險絲	2.41*7.1mm	1A	125V	50A/Vac300A/Vac
11191	R251-2A	Littelfuse	PICO II Very Fast-Acting Subminiature Axial leaded 保險絲	2.41*7.1mm	2A	125V	50A/Vac300A/Vac
10153	R251-3A	Littelfuse	PICO II Very Fast-Acting Subminiature Axial leaded 保險絲	2.41*7.1mm	3A	125V	50A/Vac300A/Vac
10154	R251-4A	Littelfuse	PICO II Very Fast-Acting Subminiature Axial leaded 保險絲	2.41*7.1mm	4A	125V	50A/Vac300A/Vac
11192	R251-5A	Littelfuse	PICO II Very Fast-Acting Subminiature Axial leaded 保險絲	2.41*7.1mm	5A	125V	50A/Vac300A/Vac
11193	R251-7A	Littelfuse	PICO II Very Fast-Acting Subminiature Axial leaded 保險絲	2.41*7.1mm	7A	125V	50A/Vac300A/Vac

## Littelfuse-KLK系列保險絲 Littelfuse-KLK Fuse Series

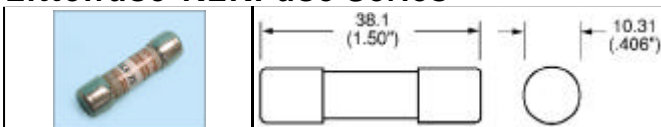

詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)

**AGENCY APPROVALS:** Listed by Underwriters Laboratories and Certified by CSA from 3/10 through 30 amperes.

**INTERRUPTING RATING:** 100,000 amperes (capable of 200,000) at 600VAC.

**MILITARY TYPE F60 INTERRUPTING RATINGS:** 200,000 amperes at 500VAC, 150,000 amperes at 500VDC  
**FUSE TO MIL SPEC:** See F60 C type in Military Section.

