


FUSES & CIRCUIT PROTECTION

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
13333	KLK20	Littelfuse	Fast-acting, high-interrupting capacity, current-limiting type fuse	10.3*38.1mm	20A	600V	200kA/500Vac

Littelfuse-272-3/278-9系列保險絲 Littelfuse-272-3/278-9FuseSeries

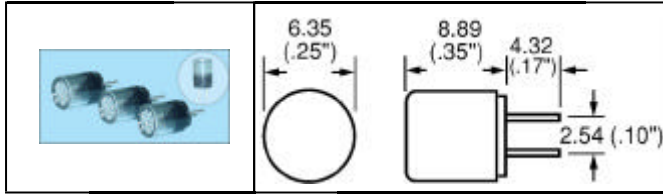


詳細產品規格--請點擊www.100y.com.tw



AGENCY APPROVALS: Recognized under the Components Program of Underwriters Laboratories and Certified by CSA.
AGENCY FILE NUMBERS: ULE10480, CSALR29862.
INTERRUPTING RATINGS: 10,000 amperes at 125VAC/VDC.
FUSE TO MIL SPEC: 273 Series is available in Military QPL type (FM02). To order, change 273 to 274.
Operating Temperature: 273 and 279: -55 to 85 °C, 272 and 278: -55 to 125 °C

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
17875	273.050	Littelfuse	Micro Fuse Very Fast-Acting	6.35*8.89mm	50mA	125V	10kA/125Vac
23903	273.500	Littelfuse	Micro Fuse Very Fast-Acting	6.35*8.89mm	500mA	125V	10kA/125Vac

Littelfuse-429系列1206SMD保險絲 Littelfuse-429Series1206SMD Fuse

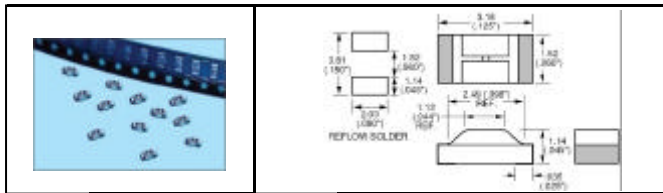


詳細產品規格--請點擊www.100y.com.tw



AGENCY APPROVALS: Recognized under the Components Program of Underwriters Laboratories and Certified by CSA.
AGENCY FILE NUMBERS: ULE10480, CSALR29862.
INTERRUPTING RATINGS: 0.125-3A 50 amperes at rated voltage, VAC/VDC
 4-7A 35 amperes at rated voltage, VAC/VDC
ENVIRONMENTAL SPECIFICATIONS:
Operating Temperature: -55 to 90 °C
Vibration: Withstands 10-55 Hz per MIL-STD-202F, Method 201A and 10-2000 Hz at 20G per MIL-STD-202F, Method 204D, Condition D.
Insulation Resistance (After Opening): Greater than 10K Ohm. Resistance to Soldering Heat: Withstands 60 seconds above 200 °C up to 260 °C, maximum.
Thermal Shock: Withstands 5 cycles of -55 to 125 °C

PartNo.	ProductNo.	Manuf.	Description	IR(A)	Current(A)	Volt
19652	429.005	Littelfuse	1206 Very Fast-Acting Thin-Film Fuse	35A/Vac	5A	24V

Conquer-保險絲 Conquer-ABE/ABP系列保險絲 Conquer-ABE/ABPFuseSeries

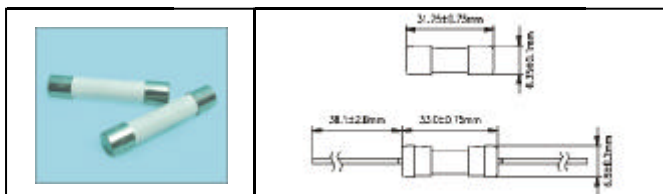

詳細產品規格--請點擊www.100y.com.tw




Approvals
 ABE
 UL Listed 10mA~15A
 UL Recognized 15.1A~25A
 CSA Certified 10mA~15A
 CSA Acceptance 15.1A~25A
 MITI 1A~15A
Electrical Characteristics

Interrupting Ratings
 10mA~10A: 10,000 amperes at 125VAC
 10mA~1A: 35 amperes at 250VAC
 1.25A~3.5A: 100 amperes at 250VAC
 3.75A~10A: 200 amperes at 250VAC
 10.1A~25A: 75 amperes at 250VAC/DC

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
12734	ABE-0.75A	conquer	Fast-Acting快溶陶瓷保險絲	6.3*32mm	0.75A	250V	10kA/125Vac
12735	ABE-1.5A	conquer	Fast-Acting快溶陶瓷保險絲	6.3*32mm	1.5A	250V	10kA/125Vac
13054	ABE-10A	conquer	Fast-Acting快溶陶瓷保險絲	6.3*32mm	10A	250V	10kA/125Vac
14613	ABE-12A	conquer	Fast-Acting快溶陶瓷保險絲	6.3*32mm	12A	250V	750A/250Vac
17181	ABE-15A	conquer	Fast-Acting快溶陶瓷保險絲	6.3*32mm	15A	250V	750A/250Vac
17378	ABE-20A	conquer	Fast-Acting快溶陶瓷保險絲	6.3*32mm	20A	250V	750A/250Vac
12737	ABE-3A	conquer	Fast-Acting快溶陶瓷保險絲	6.3*32mm	3A	250V	10kA/125Vac
17379	ABE-6A	conquer	Fast-Acting快溶陶瓷保險絲	6.3*32mm	6A	250V	10kA/125Vac
12736	ABE-8A	conquer	Fast-Acting快溶陶瓷保險絲	6.3*32mm	8A	250V	10kA/125Vac

Conquer-GSL/GST系列保險絲 Conquer-GSL/GSTFuse Series

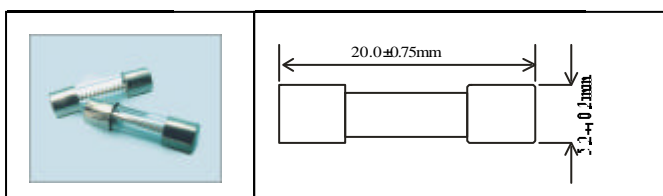

詳細產品規格--請點擊www.100y.com.tw



Approvals
 GTE
 UL Listed 500mA~10A
 CSA Certified 500mA~10A
 MITI 1A~10A
Interrupting Rating
 10mA~1A: 35 amperes at 250VAC
 1.25~3.5A: 100 amperes at 250VAC
 3.75A~10A: 200 amperes at 250VAC

Operating Temperature
 -55 to +125 °C

Physical Specification
Material
 Glass body/Nickel Plated Brass Caps
 Lead Wire:
 Diameter 0.8mm 14A and less.
 Diameter 1.0mm for rating above 15A to 19A
 Diameter 1.2mm for rating above 20A.

