


FUSES & CIRCUIT PROTECTION

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
12682	GSL-0.125A	conquer	慢熔玻璃管保險絲	5*20mm	0.125A	250V	10kA/125Vac
12683	GSL-0.16A	conquer	慢熔玻璃管保險絲	5*20mm	0.16A	250V	10kA/125Vac
12681	GSL-0.1A	conquer	慢熔玻璃管保險絲	5*20mm	0.1A	250V	10kA/125Vac
12685	GSL-0.25A	conquer	慢熔玻璃管保險絲	5*20mm	0.25A	250V	10kA/125Vac
12684	GSL-0.2A	conquer	慢熔玻璃管保險絲	5*20mm	0.2A	250V	10kA/125Vac
12686	GSL-0.315A	conquer	慢熔玻璃管保險絲	5*20mm	0.315A	250V	10kA/125Vac
13422	GSL-0.4A	conquer	慢熔玻璃管保險絲	5*20mm	0.4A	250V	10kA/125Vac
12687	GSL-0.5A	conquer	慢熔玻璃管保險絲	5*20mm	0.5A	250V	10kA/125Vac
13024	GSL-0.63A	conquer	慢熔玻璃管保險絲	5*20mm	0.63A	250V	10kA/125Vac
17004	GSL-0.8A	conquer	慢熔玻璃管保險絲	5*20mm	0.8A	250V	10kA/125Vac
13023	GSL-1.25A	conquer	慢熔玻璃管保險絲	5*20mm	1.25A	250V	10kA/125Vac
13748	GSL-10A	conquer	慢熔玻璃管保險絲	5*20mm	10A	250V	10kA/125Vac
13053	GSL-12A	conquer	慢熔玻璃管保險絲	5*20mm	12A	250V	10kA/125Vac
12688	GSL-1A	conquer	慢熔玻璃管保險絲	5*20mm	1A	250V	10kA/125Vac
12690	GSL-2.5A	conquer	慢熔玻璃管保險絲	5*20mm	2.5A	250V	10kA/125Vac
12689	GSL-2A	conquer	慢熔玻璃管保險絲	5*20mm	2A	250V	10kA/125Vac
12692	GSL-3.15A	conquer	慢熔玻璃管保險絲	5*20mm	3.15A	250V	10kA/125Vac
17382	GSL-3A	conquer	慢熔玻璃管保險絲	5*20mm	3A	250V	10kA/125Vac
12980	GSL-4A	conquer	慢熔玻璃管保險絲	5*20mm	4A	250V	10kA/125Vac
12691	GSL-5A	conquer	慢熔玻璃管保險絲	5*20mm	5A	250V	10kA/125Vac
13025	GSL-6.3A	conquer	慢熔玻璃管保險絲	5*20mm	6.3A	250V	10kA/125Vac
12693	GSL-6A	conquer	慢熔玻璃管保險絲	5*20mm	6A	250V	10kA/125Vac
12694	GSL-7A	conquer	慢熔玻璃管保險絲	5*20mm	7A	250V	10kA/125Vac
12695	GSL-8A	conquer	慢熔玻璃管保險絲	5*20mm	8A	250V	10kA/125Vac

Conquer-ADL/ADP系列保險絲 Conquer-ADL/ADPFuseSeries

詳細產品規格--請點擊www.100y.com.tw

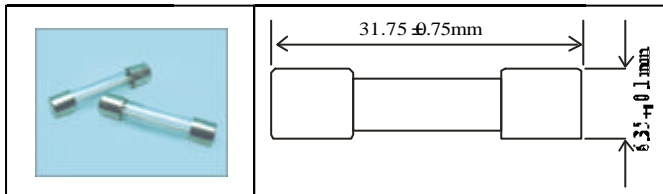

Approvals
 ADL
 ULListed 200mA~10A
 CSA Certified 200mA~10A
 MITI 1A~10A

Operating Temperature
 -55 to +125

Physical Specification
Materials
 Glassbody/Nickel Plated Brass Caps


Interrupting Ratings
 10mA~10A: 10,000 amperes at 125VAC
 10mA~1A: 35 amperes at 250VAC
 1.2A~3.5A: 100 amperes at 250VAC
 3.75A~10A: 200 amperes at 250VAC

LeadWire:
 Diameter 0.8mm 12A and less.
 Diameter 1.0mm for rating above 13A to 19A.
 Diameter 1.2mm for rating above 20A.

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
12706	ADL-0.5A	conquer	慢熔玻璃管保險絲	6.3*32mm	0.5A	250V	10kA/125Vac
13021	ADL-1.25A	conquer	慢熔玻璃管保險絲	6.3*32mm	1.25A	250V	10kA/125Vac
15501	ADL-1.5A	conquer	慢熔玻璃管保險絲	6.3*32mm	1.5A	250V	10kA/125Vac
13405	ADL-10A	conquer	慢熔玻璃管保險絲	6.3*32mm	10A	250V	10kA/125Vac
13022	ADL-15A	conquer	慢熔玻璃管保險絲	6.3*32mm	15A	250V	10kA/125Vac
12979	ADL-1A	conquer	慢熔玻璃管保險絲	6.3*32mm	1A	250V	10kA/125Vac
18063	ADL-2.5A	conquer	慢熔玻璃管保險絲	6.3*32mm	2.5A	250V	10kA/125Vac
13020	ADL-2A	conquer	慢熔玻璃管保險絲	6.3*32mm	2A	250V	10kA/125Vac
17381	ADL-3A	conquer	慢熔玻璃管保險絲	6.3*32mm	3A	250V	10kA/125Vac
12707	ADL-4A	conquer	慢熔玻璃管保險絲	6.3*32mm	4A	250V	10kA/125Vac
17971	ADL-5A	conquer	慢熔玻璃管保險絲	6.3*32mm	5A	250V	10kA/125Vac
17380	ADL-6.25A	conquer	慢熔玻璃管保險絲	6.3*32mm	6.25A	250V	10kA/125Vac
13404	ADL-7A	conquer	慢熔玻璃管保險絲	6.3*32mm	7A	250V	10kA/125Vac
14025	ADL-8A	conquer	慢熔玻璃管保險絲	6.3*32mm	8A	250V	10kA/125Vac

Conquer-SDL/SDP系列保險絲 Conquer-SDL/SDPFuse Series

詳細產品規格--請點擊www.100y.com.tw

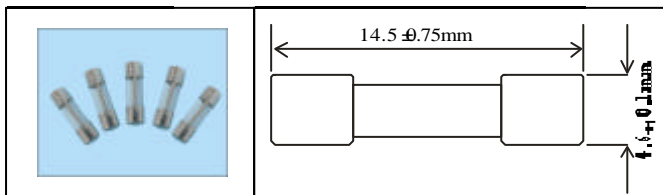

Approvals
 ULListed 10mA~8A
 CSA Certified 10mA~8A
 MITI 1A~8A

Lighting Surge Withstand Capability
 Peak Currents And Perk 800V, 10x560
 Microseconds.

Physical Specification
Material
 Glassbody/Nickel Brass Caps

Interrupting Ratings
 10mA~1A: 35 amperes at 250VAC

Operating Temperature
 -55 to +125

LeadWire:
 Tin-lead plated Copper, Diameter 0.6mm.

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
13441	SDL-0.25A	conquer	慢熔玻璃管	4.5* 14.5mm	0.25A	250V	10kA/125Vac

