

AC Current transducer AKR-B420L

$$I_{PN} = 2..200A$$

A Split Core transducer for the electronic measurement AC waveforms current, with galvanic isolation between the primary (High power) and the secondary circuits (Electronic circuit). Jumper selectable ranges and True RMS 4-20mA current output.



Electrical data

Primary Nominal Current I_{PN} (A.t.RMS)	Analogue Output Signal ¹⁾ I_{OUT} (mA)	Type	RoHS Date Code
2,5	4-20	AKR 5 B420L	JUNE 2006
10,20,50	4-20	AKR 50 B420L	planned
100,150,200	4-20	AKR 200 B420L	planned
V_c	Supply voltage (Loop powered)	24	V DC
R_L	Load resistance	see power supply diagram	
V_b	Rated voltage (CAT III, PD2)	150	V AC
V_d	RMS Isolation voltage test, 50 Hz, 1mn	3	kV AC
f	Frequency bandwidth	10-400	Hz

Accuracy - Dynamic performance data

X	Accuracy @ I_{PN} , $T_A=25^\circ C$	± 1	%
t_r	Response time @ 90% of I_{PN}	< 600	ms

General data

T_A	Ambient operating temperature (0-95% RH)	- 20 ...+ 50	$^\circ C$
T_S	Ambient storage temperature	- 20 ...+ 85	$^\circ C$
m	Mass	120	g
	Safety	IEC 61010-1	
	EMC	EN 61326	

Note: ¹⁾ For 4-20mA output model, no saturation output up to 23 mA.

Selecting the transducer

VFD (Variable Frequency Drive) and SCR (Semi Conductor Rectifier) output waveforms are rough approximations of a sine wave. There are numerous spikes and dips in each cycle. AKR transducers use a mathematical algorithm called "True RMS," which integrates the actual waveform over time. True RMS is the only way to accurately measure distorted AC waveforms. *Select AKR transducers for nonlinear loads or in "noisy" power environments.*

LEM reserves the right to carry out modifications on its transducers, in order to improve them, without previous notice.

Features

- VFD and SCR waveforms current measurement
- True RMS responding
- Split core box
- Current output
- Loop powered transducers
- Panel mounting
- Jumper selectable ranges

Advantages

- Large aperture
- High isolation between primary and secondary circuits
- Easy to mount


Applications

- VFD Controlled Loads: VFD output indicates how the motor and attached load are operating.
- SCR Controlled Loads: Accurate measurement of phase angle fired or burst fired (time proportioned) SCRs.
- Switching Power Supplies and Electronic Ballasts: True RMS sensing is the most accurate way to measure power supply or ballast input power.

Options on request

- DIN mounting

Dimensions AKR-B420L (unit : mm, 1mm = 0.0394 inch)

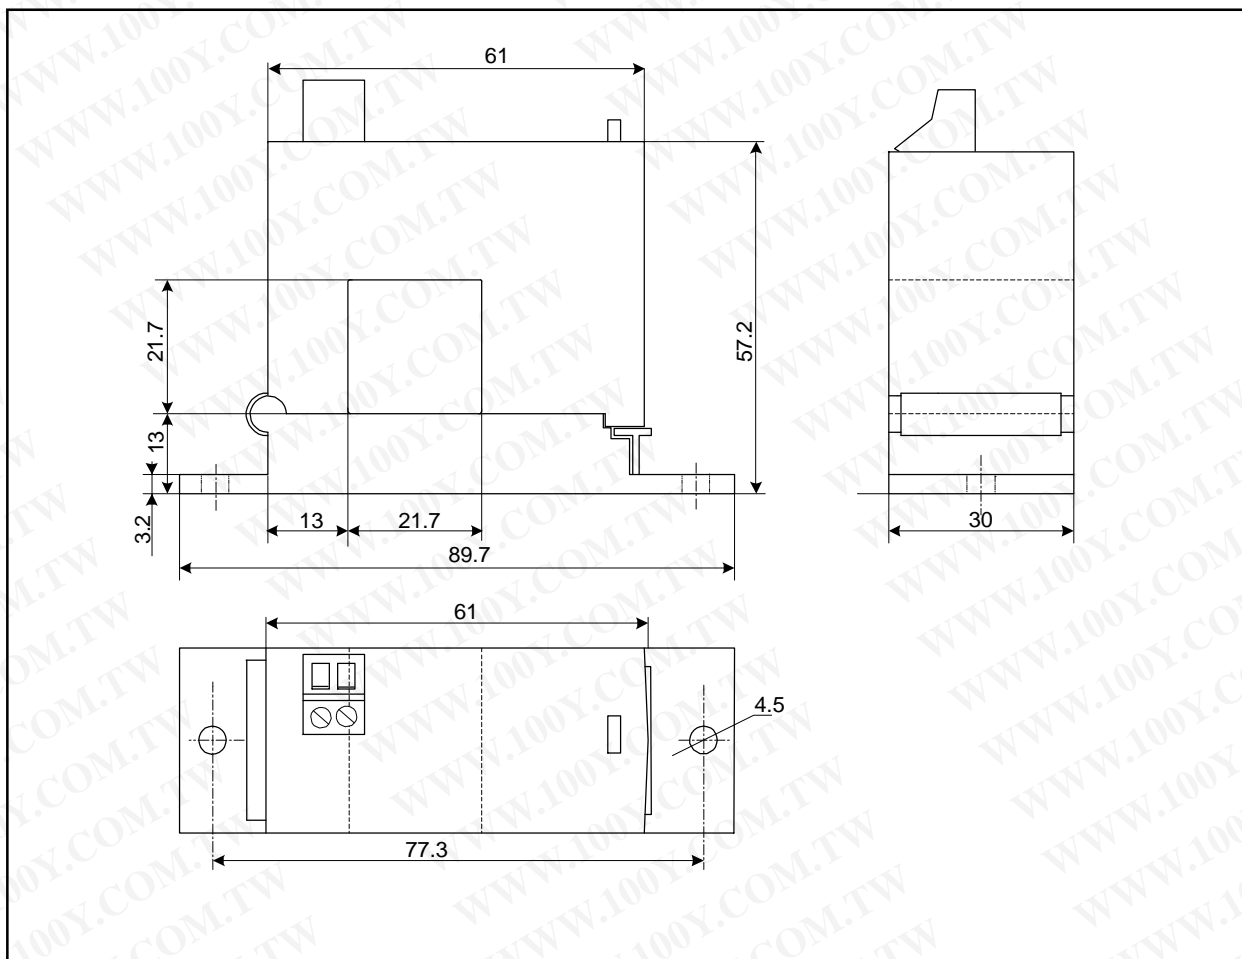


Mechanical characteristics

- General tolerance ± 1 mm
- Primary aperture 21.7 mm sq.
- Panel mounting 2 holes $\varnothing 4.5$ mm
- Distance between holes 77.3 mm

Connections


- 2 x UNC8 Cylindric Head

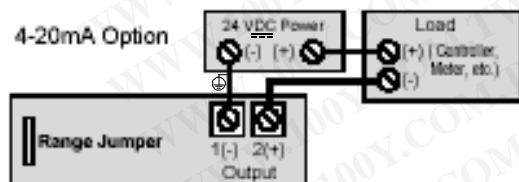

Notes:

- Captive screw terminals.
- 12-22 AWG solid or stranded.
- Observe polarity.

Power Supply diagram

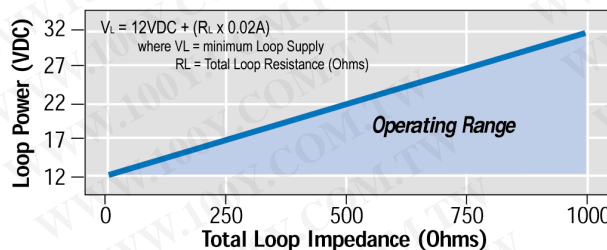

Remark

- Temperature of the primary conductor should not exceed 60°C.