


# FUSES & CIRCUIT PROTECTION

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
10058	AFE-7A	conquer	快熔玻璃管保險絲	6.3*32mm	7A	250V	10kA/125Vac
15056	AFE-8A	conquer	快熔玻璃管保險絲	6.3*32mm	8A	250V	10kA/125Vac

## Conquer-MET系列保險絲 Conquer-METFuseSeries

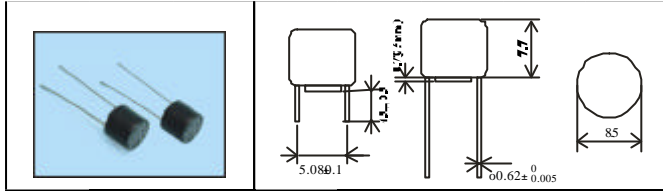

詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)

**Approvals**  
 VDE 40mA~4A  
 ULRecognized 40mA~6.3A  
 CSAAcceptance 40mA~6.3A  
 MITI 1A~6.3A


**EnvironmentalSpecification**  
 OperatingTemperature:-55 to+125  
 SolderingConditions  
 InfraredReflow:260 , 20secmax.  
 WaveSolder:260 , 10secmax.  
 (MIL-STD-202,Method210)  
 Solderability:MIL-STD-202,Method208

**InterruptingRatings**  
 35amperesor10xratedcurrent;  
 whicheverisgreaterat250VAC.

**Materials:**  
 BaseAndCap:Blockthermoplastic,  
 UL94-V0Pin:Tin-leadplatedalloy

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
13359	MET-1A	conquer	慢溶插板式保險絲	8.35*7.7mm	1A	250V	35A/250Vac

## Conquer-GTE/GTP系列保險絲 Conquer-GTE/GTPFuseSeries

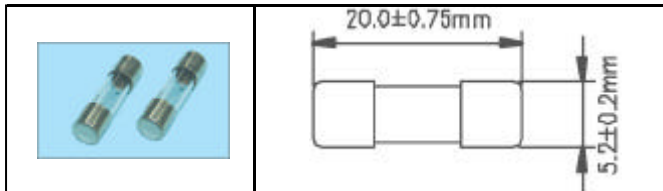

詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)

**GTE**  
 ULListed:500mA~10A  
 CSA Certified:500mA~10A  
 MITI:1A~10A


**InterruptingRatings**  
 500mA~10A:10,000amperesat  
 125VAC  
 500mA~1A:35amperesat250VAC  
 1.25A~3.5A:100amperesat250VAC  
 3.75A~10A:200amperesat250VAC

**OperatingTemperature**  
 -55 to+125

**PhysicalSpecification**  
**Materials**  
 Glassbody/NickelPlatedBrassCaps  
 LeadWire:  
 Diameter 0.8mm14Aandless.  
 Diameter 1.0mmforratingabove15A  
 to19A.  
 Diameter 1.2mmforratingabove20A.

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
23878	GTE-0.8A	conquer	慢熔玻璃保險絲	5*20mm	0.8A	250Vac	10kA/125V

## Conquer-JSO/JSP系列保險絲 Conquer-JSO/JSPFuseSeries

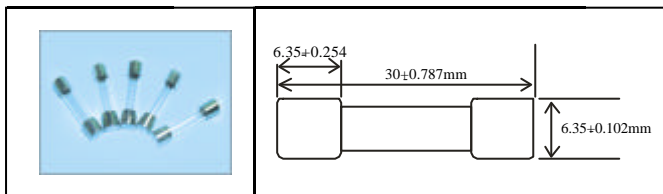

詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)

**Approvals**  
 JSO  
 MITI 1A~30A


**PhysicalSpecification**  
**Materials**  
 Glassbody/NickelPlatedBrassCaps  
 LeadWire:  
 Diameter0.8mm12Aandless.  
 Diameter0.1.0mmforratingabove  
 13Ato19A  
 Diameter01.6mmforratingabove

**InterruptingRatings**  
 1A~30A: 100amperesat250VAC

**OperatingTemperature**  
 20A  
 -55 to+125

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
15305	JSO-0.15A-250V	conquer	玻璃管保險絲 日規特性	6.4*30mm	0.15A	250V	500A/125Vac

## Conquer-ADA/APA系列保險絲 Conquer-ADA/APAFuse Series

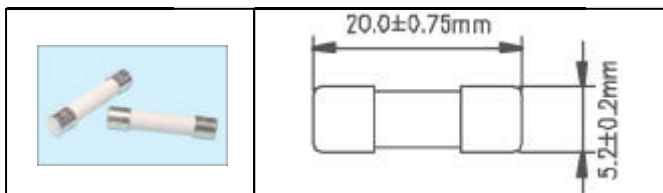

詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)

**ADA**  
 ULListed:100mA~20A  
 CSA Certified:100mA~15A  
 MITI:1A~5A

**InterruptingRatings**  
 500mA~10A:10,000amperesat  
 125VAC  
 500mA~1A:35amperesat250VAC  
 1.25A~3.5A:100amperesat250VAC  
 3.75A~10A:200amperesat250VAC

**OperatingTemperature**  
 -55 to+125

**PhysicalSpecification**  
**Materials**  
 Glassbody/NickelPlatedBrassCaps  
 LeadWire:  
 Diameter 0.8mm14Aandless.  
 Diameter 1.0mmforratingabove15A  
 to19A.  
 Diameter 1.2mmforratingabove20A.

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
19474	ADA-25A	conquer	慢熔陶瓷保險絲	6.3*32mm	25A	250V	250V

## Conquer-UBM/UBM-A系列保險絲 Conquer-UBM/UBM-AFuse Series

詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
24055	UBM-0.1A	conquer	QuickActing High BreakingCapacity快溶陶瓷保險絲	5*20mm	0.1A	250V	1500A/250Vac

