


FUSES & CIRCUIT PROTECTION



UBM-A(WithPig-Tail)
 SEMKO:63mA-6.3A
 VDE:63mA-6.3A
 BSI:63mA-6.3A
 IMQ:63mA-6.3A
 ULRecognized:63mA-10A
 CSAAcceptance:63mA-10A
 MITI:1A-5A
 CCEE:63mA-6.3A
InterruptingRatings
 1500ampersat250VAC.

OperatingTemperature
 -55 to+125
PhysicalSpecification
Materials
 Glassbody/NickelPlated
 BrassCapsLeadWire:
 Tin-leadplatedCopper,Diameter
 0.8mm

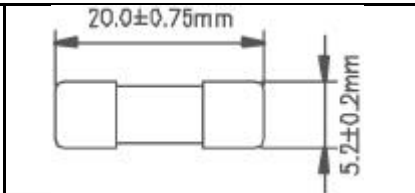

PartNo.	ProductNo.	Manuf.	Description	Size	Current(A)	Volt	IR(A)
24055	UBM-0.1A	conquer	QuickActing High BreakingCapacity快溶陶瓷保險絲	5*20mm	0.1A	250V	1500A/250Vac

Conquer-EAF/UAF/AUE/JUE/AUB系列保險絲 Conquer-EAF/UAF/AUE/JUE/AUBFuseSeries



AUBFastActingCeramicTubeFuses
 10.3 x38.1mm(13/32x1-1/2inch)
 AmpereRating:500mAto80A
 VoltageRating:600Vandless
ElectricalCharacteristics:
 135%-1Hour, Maximum
 200%-120Seconds, Maximum
 Caps:GoldFinishForHighPerformance
 Standards:ULListed,CSACertified30Aandless



PartNo.	ProductNo.	Manuf.	Description	Size(mm)	Current(A)	Volt
14221	AUB-5A	Conquer	快熔陶瓷保險絲	10.3*38.1	5A	600V


SIEMENS-保險絲 SIEMENS-5SE2系列保險絲 SIEMENS-5SE2 FuseSeries



PartNo.	ProductNo.	Manuf.	Description	Current(A)	Volt
20086	5SE2220	SIEMENS	SIEMENS FUSE	20A	380-250V

保險絲

Miniature G 系列保險絲 Miniature G FuseSeries

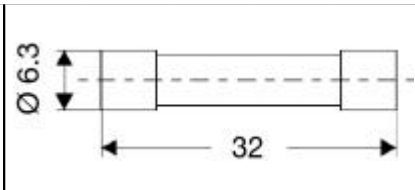


PartNo.	ProductNo.	Manuf.	Description	Size(D*Hmm)	WorkingVolt.	安培(A)	IR(A)
23980	70-125-40-10A	*****	快溶陶瓷保險絲 FF 20A	6.35*32mm	AC500V	10A	50kA
23981	70-125-40-16A	*****	快溶陶瓷保險絲 FF 20A	6.35*32mm	AC500V	16A	50kA
23923	70-125-40-20A	*****	快溶陶瓷保險絲 FF 20A	6.35*32mm	AC500V	20A	50kA
23977	70-125-40-2A	*****	快溶陶瓷保險絲 FF 20A	6.35*32mm	AC700V	2A	50kA
23978	70-125-40-5A	*****	快溶陶瓷保險絲 FF 20A	6.35*32mm	AC500V	5A	50kA
23979	70-125-40-6.3A	*****	快溶陶瓷保險絲 FF 20A	6.35*32mm	AC500V	6.3A	50kA

詳細產品規格--請點擊www.100y.com.tw

Features/Benefits
 Veryhighinterruptingratingupto70kA
 Highratedvoltagesupto10kV
 Highfuseratingsavailableforsemiconductorprotection
 Fusebases,clipsandaccessoriesareavailable

URZgR/aR/gRL 圓形系列保險絲 URZgR/aR/gRLSemiconductor Protection CylindricalFuses

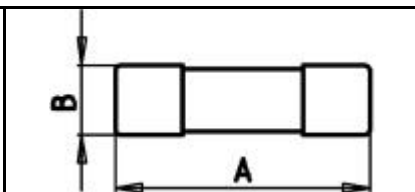

Features/Benefits
 Highinterruptingratingupto300kA
 VoltagegeratingAC250VuptoAC1000V
 ProtectionofPowerSemiconductorsaccordingtoIEC60269-1and-4
 Withorwithoutintegratedstrikerpin
 ClassaRaccordingtoIEC60269-4andDINVDE0636-40
 ClassgRaccordingDINVDE0636-40
 Fuse-Bases/Fuse-ClipsandAccessoriesareavailable
SIBA cylindricalultra-rapidfusesareavailablein6differentsizes.Theycanbe fittedwithorwithoutbuilt-instrikerpinforfuseblowindicationoroperationof microswitches.

PartNo.	ProductNo.	Manuf.	Description	Size(D*Hmm)	WorkingVolt.	安培(A)	IR(A)
22591	60 033 0 5	*****	g R Cylindrical Fuse -European Standard	10*38mm	600V	20A	300kA

日本大東-保險絲 日本大東-HM/DM/LM系列保險絲 HM/DM/LMSeriesMicroFusesForPCB

詳細產品規格--請點擊www.100y.com.tw

