

FUSES & CIRCUIT PROTECTION


PartNo.	ProductNo.	Manuf.	Description	極數(P)	額定電流	額定電壓
15279	NVB-50F-2P/15A	Shinlin	漏電斷路器	1P	15A	110V,220V
11207	NVB-50F-2P/20A	Shinlin	漏電斷路器	2P	20A	110V,220V
10991	S251		無熔絲開關	1P	10A	400VAC
13257	SR-40		漏電斷路器			

玻璃保險絲

快速5.2*20mm玻璃保險絲

FastActing5.2*20mmGlassTubeMiniatureFuses

詳細產品規格--請點擊www.100y.com.tw

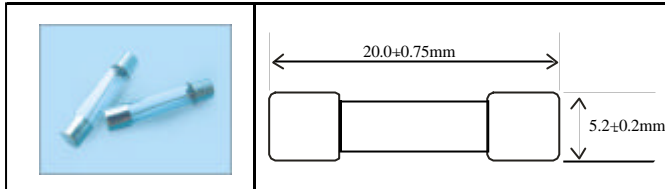

Structure:
 (1)Caps:Cylindrical,brasswithnickelfinish
 (2)Body:GlassTube
 (3)Wire:SilverAlloy
 (4)Leas:TinnedCopperWire

Approvals
 GFE
 ULListed 10mA~10A
 CSA Certified 10mA~10A
 MITI 1A~10A

InterruptingRatings
 10mA~1A 35amperesat250VAC
 1.5A~3.5A 100amperesat250VAC
 3.75A~10A 200amperesat250VAC


OperatingTemperature
 -55 to+125

Materials
 Glassbody/NickelPlatedBrassCaps
 Lead Wire:

PartNo.	ProductNo.	Manuf.	Description	直徑長	Amp.	Volt	安規
10071	G FE-8A		快速保險絲	5.2*20mm	8A	250Vac	UL,CSA
10072	MFG-0.1A	JENNFENG	快速保險絲	5.2*20mm	0.1A	250Vac	UL,CSA
8369	MFG-10A	JENNFENG	快速保險絲	5.2*20mm	10A	250Vac	UL,CSA
10081	MFG-15A	JENNFENG	快速保險絲	5.2*20mm	15A	250Vac	UL,CSA
10109	MFG-20A	JENNFENG	快速保險絲	5.2*20mm	20A	250Vac	UL,CSA
10080	MFG-7A	JENNFENG	快速保險絲	5.2*20mm	7A	250Vac	UL,CSA

快速6.3*30mm玻璃保險絲

FastActing6.3*30mmGlassTubeMiniatureFuses

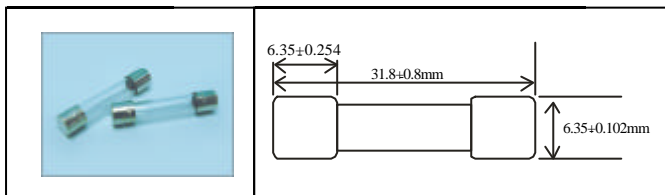

Structure:
 Caps:Cylindrical,brasswithnickelfinish
 Body:GlassTube
 Wire:SilverAlloy
 Leas:TinnedCopperWire

PartNo.	ProductNo.	Manuf.	Description	直徑長	Amp.	Volt	安規
10059	MFA-0.25A	JENN FENG	快速保險絲	6.3*31.75mm	0.25A	250Vac	UL,CSA
10083	MFA-0.75A	JENN FENG	快速保險絲	6.3*31.75mm	0.75A	250Vac	UL,CSA
7191	MFA-10A	JENN FENG	快速保險絲	6.3*31.75mm	10A	250Vac	UL,CSA
7192	MFA-15A	JENN FENG	快速保險絲	6.3*31.75mm	15A	250Vac	UL,CSA
10068	MFA-20A	JENN FENG	快速保險絲	6.3*31.75mm	20A	250Vac	UL,CSA
10222	MFA-3.15A	JENN FENG	快速保險絲	6.3*31.75mm	3.15A	250Vac	UL,CSA

其他類保險絲

OtherTypeFuses

詳細產品規格--請點擊www.100y.com.tw

	AGENCY APPROVALS ListedbyUnderwriters Laboratories(1-40amperes).CertifiedbyCSA(3-30amperes). DESIGNSTANDARDS U.L.Standardfor Automotive
	CR6L型特點 反復電流耐度高 熔斷體的設計構造完全可以承受因急電流引發的負載電流。 熔斷顯示,可帶微型開關 可裝配1C觸頭
	 EZ-M330015

	DESIGNSTANDARDS: U.L.Standardfor AutomotiveBladeTypeFusesSAE(Societyof AutomotiveEngineers)J1284. PATENTED COLOR-CODING: Autofusefusesarecolor-codedforeasyAmperageidentification. INTERRUPTINGRATING:1000A@23VDC
	AAE FastActingGlassTubeFuses 6.3 x15.9mm(1/4x5/8inch) AmpereRating:63MAto30A VoltageRating:250Vandless ElectricalCharacteristics: 135%-1Hour,Maximum 200%-5Seconds,Maximum

