

# EMC/RFI Filters for Industrial Electronics




- Excellent filter performance for applications with high interference levels
- Filters for two-phase supply up to 2x 520 VAC (P-P) available
- Fast and comfortable snap-in installation on popular TS 35 DIN-rails up to 45 A
- Industrial grade terminal blocks for unsurpassed electrical safety




### Performance indicators

Attenuation performance

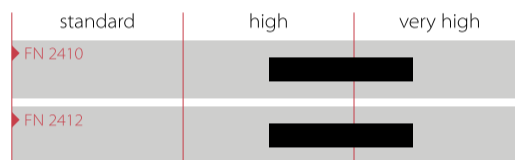

Rated current [A]

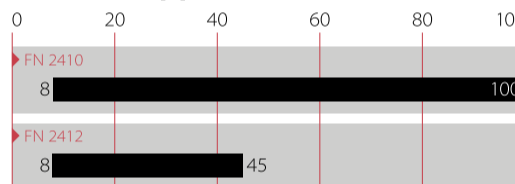

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Technical Specifications

<b>Maximum continuous operating voltage</b>	2x 520/300 VAC (FN 2410 H/FN 2412 H) 1x 250 VAC (FN 2410/FN 2412)
<b>Operating frequency</b>	DC to 400 Hz
<b>Rated currents</b>	8 to 45 A @ 50°C (FN 2412) 8 to 100 A @ 50°C (FN 2410)
<b>High potential test voltage</b>	P → P 2250 VDC for 2 sec (H types) P → E 2000 VAC for 2 sec P → N 1100 VDC for 2 sec P → E 2700 VDC for 2 sec (H types)
<b>Protection category</b>	IP 20
<b>Overload capability</b>	4x rated current at switch on, 1.5x rated current for 1 minute, once per hour
<b>Temperature range (operation and storage)</b>	-25°C to +100°C (25/100/21)
<b>Flammability corresponding to</b>	UL 94 V-2 or better
<b>Design corresponding to</b>	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939
<b>MTBF @ 50°C/250 V (Mil-HB-217F)</b>	1,200,000 hours 250,000 hours (H types)

### Approvals & Compliances




### Features and Benefits

- FN 2410 filters up to 100 A are designed for traditional chassis mounting
- For extra fast installation, FN 2412 filters up to 45 A can comfortably be snapped-in on popular TS 35 DIN-rails which are common in most electrical cabinets
- Both FN 2410 and FN 2412 are also available as „H versions“. These are ideally suitable for an operation on two phases in a three-phase power network, handling voltages up to 520 VAC
- All filters provide an exceptional conducted attenuation performance, based on chokes with high saturation resistance and excellent thermal behavior. Thus, all filters retain the expected filter performance even in very noisy applications and under full load conditions
- Touch-safe industrial grade terminal blocks provide maximum electrical safety and protect humans from undeliberate contact with life conductors. They help to fulfill the most demanding installation standards


### Typical Applications

- Small to medium-sized machines and industrial equipment
- High-end single-phase power supplies
- Single-phase variable speed motor drives, inverters and converters
- DIN-rail filter versions are ideal for panel building and electrical cabinets
- Various noisy applications with higher power single-phase or two-phase supply

### Typical electrical schematic

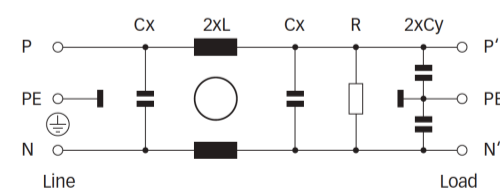

### Filter Selection Table

Filter	Rated current	Leakage current*	Power loss	Input/Output connections	Weight
	@ 50°C (40°C)	@ 250 VAC /50 Hz (@ 120 VAC /60 Hz)	@ 25°C/50 Hz		
	[A]	[mA]	[W]		[kg]
<b>FN 2410-8-44</b>	8 (8.8)	2.60 (1.49)	2.6	-44	0.4
<b>FN 2410-16-44</b>	16 (17.5)	2.60 (1.49)	3.5	-44	0.5
<b>FN 2410-25-33</b>	25 (27.4)	2.60 (1.49)	5.5	-33	0.6
<b>FN 2410-32-33</b>	32 (35.0)	2.60 (1.49)	5.6	-33	0.7
<b>FN 2410-45-33</b>	45 (49.3)	2.60 (1.49)	7.4	-33	0.7
<b>FN 2410-60-34</b>	60 (65.7)	2.60 (1.49)	5.5	-34	1.8
<b>FN 2410-80-34</b>	80 (87.6)	2.60 (1.49)	9.9	-34	1.8
<b>FN 2410-100-34</b>	100 (109.5)	2.60 (1.49)	15.4	-34	1.8
<b>FN 2410 H-8-44</b>	8 (8.8)	2.60 (1.49)	2.6	-44	0.5
<b>FN 2410 H-16-44</b>	16 (17.5)	2.60 (1.49)	3.5	-44	0.6
<b>FN 2410 H-25-33</b>	25 (27.4)	2.60 (1.49)	5.5	-33	0.7
<b>FN 2410 H-32-33</b>	32 (35.0)	2.60 (1.49)	5.6	-33	0.8
<b>FN 2410 H-60-34</b>	60 (65.7)	2.60 (1.49)	5.5	-34	1.9
<b>FN 2410 H-80-34</b>	80 (87.6)	2.60 (1.49)	9.9	-34	1.9
<b>FN 2410 H-100-34</b>	100 (109.5)	2.60 (1.49)	15.4	-34	1.9
<b>FN 2412-8-44</b>	8 (8.8)	2.60 (1.49)	2.6	-44	0.4
<b>FN 2412-16-44</b>	16 (17.5)	2.60 (1.49)	3.5	-44	0.6
<b>FN 2412-25-33</b>	25 (27.4)	2.60 (1.49)	5.5	-33	0.7
<b>FN 2412-32-33</b>	32 (35.0)	2.60 (1.49)	5.6	-33	0.8
<b>FN 2412-45-33</b>	45 (49.3)	2.60 (1.49)	7.4	-33	0.8
<b>FN 2412 H-8-44</b>	8 (8.8)	2.60 (1.49)	2.6	-44	0.5
<b>FN 2412 H-16-44</b>	16 (17.5)	2.60 (1.49)	3.5	-44	0.7
<b>FN 2412 H-25-33</b>	25 (27.4)	2.60 (1.49)	5.5	-33	0.8
<b>FN 2412 H-32-33</b>	32 (35.0)	2.60 (1.49)	5.6	-33	0.9



\* Maximum leakage under normal operating conditions (acc. to IEC60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.

### Typical Filter Attenuation

Per CISPR 17; A=50 Ω/50 Ω sym; B=50 Ω/50 Ω asym; C=0.1 Ω/100 Ω sym; D=100 Ω/0.1 Ω sym



8 to 45 A types

60 to 100 A types

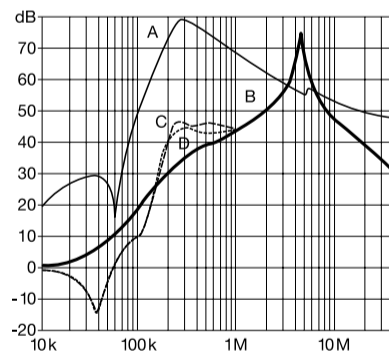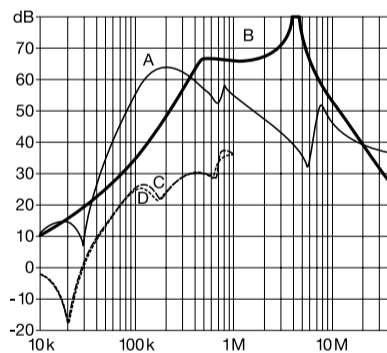

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Mechanical Data

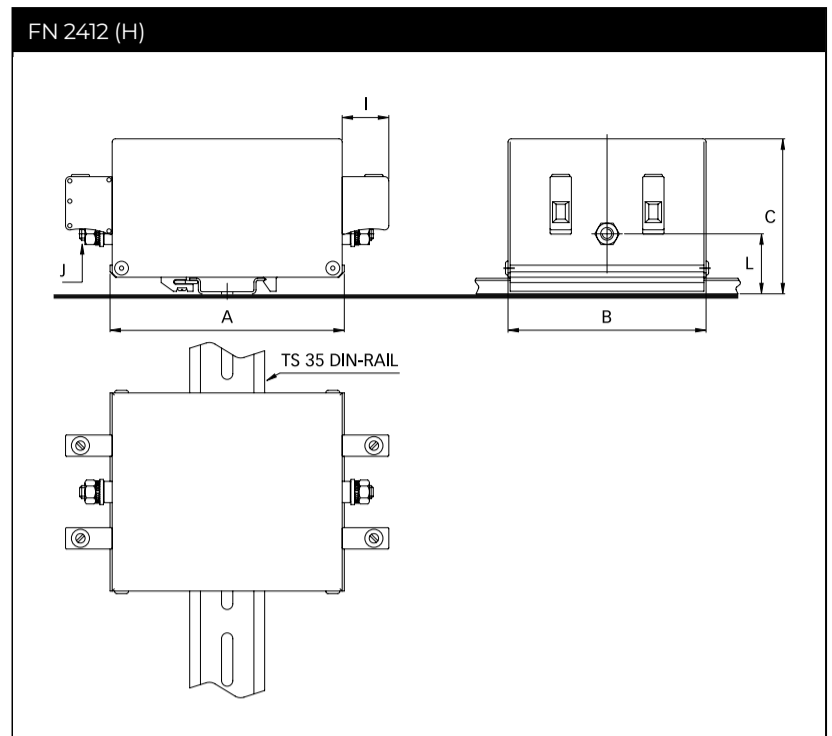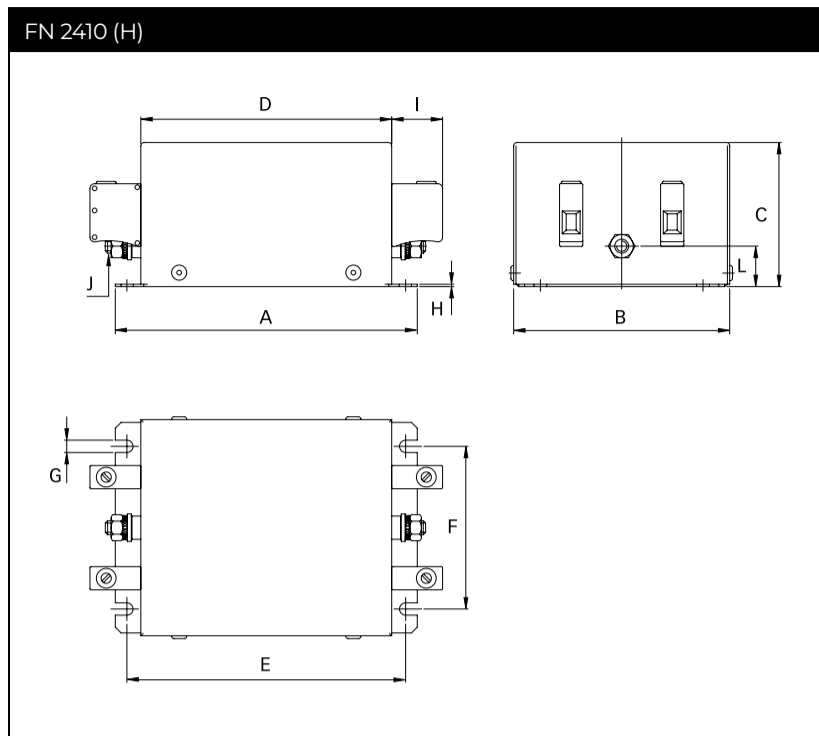

### Dimensions

	FN 2410						FN 2412						
	8 A	16 A	25 A	32 A	45 A	60 A	80 A	100 A	8 A	16 A	25 A	32 A	45 A
<b>A</b>	130	130	130	130	130	165	165	165	110	110	110	110	110
<b>B</b>	93	93	93	93	93	115	115	115	93	93	93	93	93
<b>C</b>	62	62	76	76	76	100	100	100	73	73	87	87	87
<b>D</b>	108	108	108	108	108	140	140	140					
<b>E</b>	120	120	120	120	120	155	155	155					
<b>F</b>	70	70	70	70	70	90	90	90					
<b>G</b>	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3					
<b>H</b>	1.0	1.0	1.0	1.0	1.0	1.2	1.2	1.2					
<b>I</b>	22	22	25	25	25	39	39	39	22	22	25	25	25
<b>J</b>	M6	M6	M6	M6	M6	M8	M8	M8	M6	M6	M6	M6	M6
<b>Rec. torque (Nm)</b>	3.5 - 4.0	3.5 - 4.0	3.5 - 4.0	3.5 - 4.0	3.5 - 4.0	8.0 - 9.0	8.0 - 9.0	8.0 - 9.0	3.5 - 4.0	3.5 - 4.0	3.5 - 4.0	3.5 - 4.0	3.5 - 4.0
<b>L</b>	17.5	17.5	31.5	31.5	31.5	39.2	39.2	39.2	28.5	28.5	42.5	42.5	42.5

All dimensions in mm; 1 inch = 25.4 mm  
Tolerances according: ISO 2768-m/EN 22768-m

### Filter Input/Output Connector Cross Sections

	-33	-34	-44
<b>Solid wire</b>	16 mm <sup>2</sup>	35 mm <sup>2</sup>	10 mm <sup>2</sup>
<b>Flex wire</b>	10 mm <sup>2</sup>	25 mm <sup>2</sup>	6 mm <sup>2</sup>
<b>AWG type wire</b>	AWG 6	AWG 2	AWG 8
<b>Recommended torque</b>	1.5-1.8 Nm	4.0-4.5 Nm	1.0-1.2 Nm

Please visit [www.schaffner.com](http://www.schaffner.com) to find more details on filter connectors.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)