


RELAYS & SOLENIIDS



Specifications/SpecialFeatures:
 Size(LxWxH):15.5x10.5x11.5mm
 Contactarrangement:1PDT
 Contactrating(resistiveload):120VAC/1A, 24VDC/2A
 Coilvoltage:5VDC、12VDC
 Coilpower(nominal):0.2W(DC)
 Breakdownvoltage:Betweencontacts:500VAC
 Betweenallelements:500VAC
 Life(min.operation):Mechanical:10⁷
 Electrical(atratedload):10⁵

Insulationresistance:500VDC, 100Mohms
 Approximateweight:3g
Safety/QualityApprovals:
 TUV
 UL
 CUL




PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	OutlineLxWxH
7682	LUZ-12	RAYEX	PCB 繼電器 LUZ	1PDT	120Vac/1A 24Vdc/2A	12Vdc	UL,CUL	15.5*10.5*11.2
2274	LUZ-5	RAYEX	PCB 繼電器 LUZ	1PDT	120Vac/1A 24Vdc/2A	5Vdc	UL	15.5*10.5*11.2



Specifications/SpecialFeatures:
 Size(LxWxH):15.5x10.5x11.5mm
 Contactarrangement:1PDT
 Contactrating(resistiveload):120VAC/1A,24VDC/2A
 Coilvoltage:3VDC、5VDC、12VDC、24VDC
 Coilpower(nominal):0.2W(DC)
 Breakdownvoltage:Betweencontacts:500VAC
 Betweenallelements:500VAC
 Insulationresistance:500VDC,100Mohms
 Life(min.operation):Mechanical:10⁷
 Electrical(atratedload):10⁵
 Approximateweight:3g

Safety/QualityApprovals:
 TUV,UL,CUL

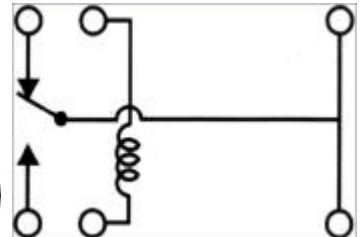


PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	OutlineLxWxH
5148	LU-12	RAYEX	PCB 繼電器 LU	1PDT	120Vac/1A 24Vdc/2A	12Vdc	UL,CUL	15.5*10.5*11.2
2269	LU-24	RAYEX	PCB 繼電器 LU	1PDT	120Vac/1A,24Vdc/2A	24Vdc	UL	15.5*10.5*11.2
3603	LU-3	RAYEX	PCB 繼電器 LU	1PDT	120Vac/1A,24Vdc/2A	3Vdc	UL	15.5*10.5*11.2
3602	LU-5	RAYEX	PCB 繼電器 LU	1PDT	120Vac/1A,24Vdc/2A	5Vdc	UL	15.5*10.5*11.2



COIL
 Pull-inVoltage:85%ofnominalvoltageorless
 DropOutVoltage:10%ofnominalvoltageormore
 Max.Voltage:110%ofnominalvoltage
 Resistance:±0%measured@25
 CoilPower:Seechart
 Duty:Continuous
CONTACTS
 ContactMaterial:Rhodium

ContactResistance:200milliohmsmax.
 ContactRating:0.5amp100VDC(10VA)
 1.5ampsmax.Continuouscarrycurrent.


TIMING
 Operatertime:-40 to+85 @ratedoperation
 Resettime:-40 to+105
SHOCKRESISTANT
 Operating:50g's



PartNo.	ProductNo.	Description	ContactRating	Type	OutlineLxWxH
20837	W107DIP	DUAL IN- LINE PACKAGE REED RELAY	0.5 amp 100VDC (10VA)/1.5 amps max. Continuous carry current	107DIP	19*7.62*6.98

3U-PCB繼電器 "3U"PCBRelays

詳細產品規格--請點擊www.100y.com.tw



PartNo.	ProductNo.	Description	CoilVoltage	Type	OutlineLxWxH
20099	SU-105VS	PCB 繼電器	5VDC	SU-1*VS	17.5*5*5
21715	SU-B205S	PCB 繼電器		SU-1*VS	17.5*5*5

OMRON-PCB繼電器 OMRON-PCBRelays

詳細產品規格--請點擊www.100y.com.tw



AutomotiveRelay
 Generalpurposeautomotiverelay.
 Handlesheavyloadsforvariousautomotive applications.
 Plug-inandPCBtypesavailable.
 Wide temperature range:-0 to+125
 High currentcapacity.

ApplicationExamples
 Electricsunroof
 Retractableheadlight
 Blowerfanmotor
 Headlamps
 Fuelpump

ABS
 ElectronicPurseSystems
 VendingMachines
 Fuelpumpcontrol
 ATMs



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22902	G8H-1C7P-DC12V	OMRON	Automotive Relay	20A(NO)/10A(NC)	G8H	SPDT	DC12V	23*15.5*28.2



測定條件:在DC5V1A電壓降下法
 測定條件:在DC500V絕緣阻抗下,耐電壓各項相同場所定
 二極體內藏型的值
 連接座P2R-05A型及P2R-08A型實裝時,AC4000V50/60HZ1分鐘
 插鞘型,Tab端子型的值
 此值是在變頻率120次/分鐘時



詳細產品規格--請點擊www.100y.com.tw

