



RELAYS & SOLENIIDS



Reduced board space ideal for high density mounting (45% smaller than the surface area of G6B)
 Slim package: measures 6.5Wx17.5Lx12.5Hmm (0.26x0.69x0.49inch)
 Switches loads up to 5A, 250VAC/30VDC
 Fully sealed construction allows automatic soldering and cleaning
 Long service life: up to 300,000 operations with a 2A, 250VAC/30VDC load
 Rated for 150 pilot duty by UL, CSA
 Optional mounting sockets simplify relay installation and servicing of finished equipment




詳細產品規格--請點擊www.100y.com.tw

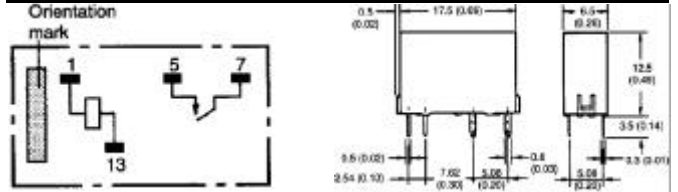

PartNo.	ProductNo.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23973	G6D-1A-DC24VDC	PCB 繼電器	5A/250VAC, 30VDC	G6D	SPST-NO	DC24V	UL, CSA	17.5*6.5*12.5




High sensitivity: 98-mW pickup coil power. Impulse withstand voltage meets FCC Part 68 requirements.
 Fully sealed construction.
 Unique moving loop armature reduces relay size, magnetic interference, and contact bounce time.
 Single- and double-winding latching types also available.

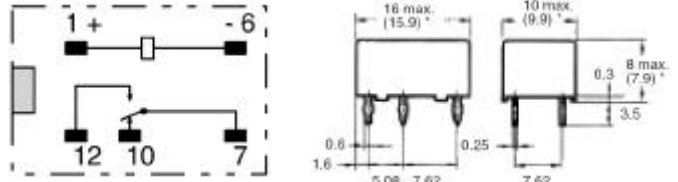

PartNo.	ProductNo.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23975	G6E-134P-US-24VDC	PCB 繼電器	0.4A/125VAC; 2 A/30VDC	G6E	SPDT	DC24V	UL, CSA	15.9*9.9*7.9



Heavy-duty Miniature Relay
 Incorporates environmentally-friendly, cadmium-free contacts
 Variety of contact forms: SPDT or SPST-ON (continuous current rating: 8A)
 Low profile (0.39Wx1.12Lx.59H inches)
 High dielectric strength of 4kV with 8mm creepage/clearance
 Sealed plastic construction
 Ideal for switching contactors, solenoids and motors

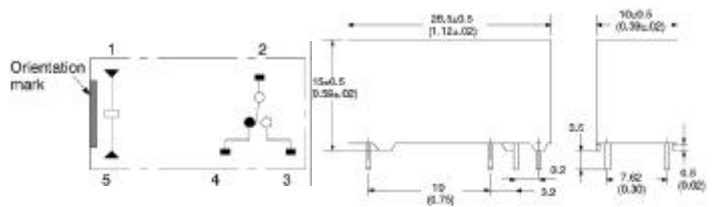

PartNo.	ProductNo.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
27612	G6RN-1-24Vdc	PCB 繼電器	8A/250Vac 5A/30Vdc	G6RN-1	SPDT	DC24V	UL, CSA	28.5*15*10

Finder-PCB 繼電器 Finder-PCB Relays

詳細產品規格--請點擊www.100y.com.tw




FR44627024

DC and sensitive DC available
 8mm, 6kV (1.2/50 μs) between coil and contacts
 Ambient temperature +85



40.61.7.024.0001
44.52.7.024


P.C.B. or plug-in mount
 AC, DC, sensitive DC or single bistable coil versions available
 8mm, 6kV (1.2/50 μs) between coil and contacts
 Ambient temperature +85
 Sockets and accessories: see 9 and 99 series

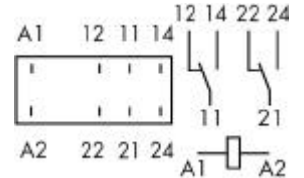


PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
17084	FR44627024	Finder	PCB 繼電器	10A	44.62	2 CO (DPDT)	24Vdc	CSA, UR, VDE	12.4*29*25
23317	40.61.7.024.0001	Finder	Miniature P.C.B. Relays	16A	40.61	1 CO (SPDT)	24Vdc	CSA, UR, VDE	12.4*29*25
17876	44.52.7.024	Finder	Miniature P.C.B. Relays	6A	44.52	2 CO (DPDT)	24Vdc	CSA, UR, VDE	12.4*29*25

Takamisawa-PCB 繼電器 Takamisawa-PCB Relays

詳細產品規格--請點擊www.100y.com.tw



FEATURES
 UL, CSA, VDE, SEV, SEMKO, FIMKO, IMQ recognized TV-3 rated
 Working class: C
 UL class B (130 °C) insulation
 Type of service: continuous duty
 Heavy duty miniature slim type power relay
 High isolation in small package
 — Insulation distance: 8mm
 — Dielectric strength: 5,000VAC (between coil and contacts)
 — Surge strength: 10,000V
 Standard and high sensitivity types available
 Flux free type and plastic sealed type available

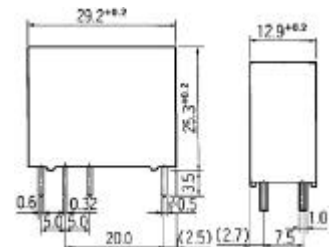

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage
22071	VB12BTBU-5-12VDC	TAKAMISAWA	信號用繼電器	5A, 2.4Vdc/240Vac	V B型	1/6HP, 120V/240Vdc	12Vdc

詳細產品規格--請點擊www.100y.com.tw

