RELAYS & SOLENIDS



FEATURES
- Extremelylowprofileandlightweight
  —Height:5mm
  —Weight:approximately1.2g
- UL,CSArecognized
- ConformstoFCCrulesandregulationspart68
  —Surgestrength1,500V
- High reliability-bifurcatedcontacts
- Wideoperatingrange
- Plasticsealedtype
- Latchingversionavailable

詳細產品規格--請點擊www.100y.com.tw

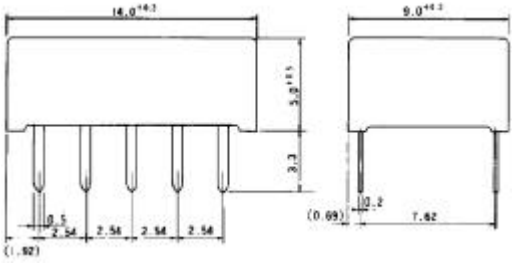

PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	QutlineLxWxH
3472	A12W-K	TAKAMISAWA	繼電器	2 Form C	1A30VDC, 0.5A125VAC	12Vdc	UL/CSA	14.0*9.0*5.0
3471	A5W-K	TAKAMISAWA	繼電器	2 Form C	1A30VDC, 0.5A125VAC	5Vdc	UL/CSA	14.0*9.0*5.0

FEATURES
- UL,CSA,VDE,SEVRecognized
- HighSensitiveandLowPowerConsumption
- HighIsolation
- WideOperatingRange
- DILPitchTerminals
- PlasticSealedTypeBackfilledwithNitrogen
- SocketMountingType&SocketAvailable
- CompatiblewithSolidStateRelaysTypeSJin SizeandPin(terminal)Arrangement

PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	QutlineLxWxH
14033	JY-12H-K	TAKAMISAWA	POWERRELAY	1 Form A(SPST-NO)	5A/250VAC,5A/30VDC	12V	UL,CSA,VDE,SEV	20*9.8*12.5mm
17447	JY-24H-K	TAKAMISAWA	POWERRELAY	1 Form A(SPST-NO)	5A30VDC/25VAC	24VDC	UL,CSA,VDE,SEV	20*9.8*12.5mm

FEATURES
- Ultraslimtypewith5mmthickness
  —Goodforhighdensitymounting
- Lowpowerconsumptionandhighsensitivity
  —Nominalcoilpower:120mW
  —Operatingpower:54mW
- UL,CSA,VDErecognized
- ConformstoIEC1010-1and1131-2
- Wideoperatingrange
- SILpitchterminals
- Plasticsealedtype
- Compatiblewithsolidstatel/O moduletypeSN(seepage376) insizeandpin(terminal) arrangement
- Environmentallyfriendlycadmium freecontacttypeisavailable.



PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	QutlineLxWxH
18691	NY24W-K	TAKAMISAWA	日製1P 4pin繼電器	1a	5A/250VAC	24Vdc	UL , CSA, VDE	5*20*17mm

FEATURES
- UL,CSA
- 4kindsofcontactratings
  —Lowlevelto10ampsswitching
- Standardandhighsensitivitytypesavailable
- Highsurgestrengthversionavailable
- ULclassB(130℃) insulationtypeavailable(onlyplasticsealedtype)
- Printedcircuitterminals-fitsgridwith0.1inch
- Plasticsealedtypebackfilledwithnitrogenavailable

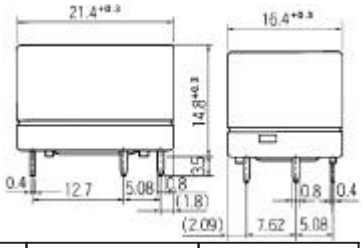

PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	QutlineLxWxH
23419	LZ-12HE	TAKAMISAWA	24V繼電器	1 form C (SPDT)	5A120VAC/24VDC	12V	UC: UL,CSA	21.4*16.4*14.8
23416	LZ-24HE	TAKAMISAWA	24V繼電器	1 form C (SPDT)	5A120VAC/24VDC	24V	UC: UL,CSA	21.4*16.4*14.8
23417	LZ-5HE	TAKAMISAWA	24V繼電器	1 form C (SPDT)	5A120VAC/24VDC	5V	UC: UL,CSA	21.4*16.4*14.8

FEATURES
- Ultrahighsensitivity
- UL,CSArecognized
- ConformstoFCCrulesandregulationsPart68
  —Surgestrength1,500V
- Highdielectricstrengthtypeavailable (RY-WFtype)
- ContactarrangementMBBtypeavailable (RY-Dtype)
- Highreliability-bifurcatedcontacts
- Wideoperatingrange
- DILpitchterminals
- Plasticsealedtype

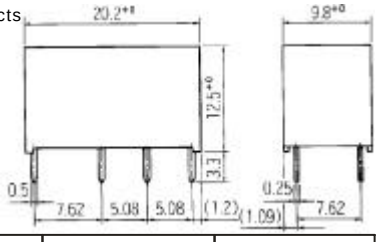

PartNo.	ProductNo.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	QutlineLxWxH
14755	RY-12W-K	繼電器	2 Form C	1A24VDC, 0.5A120VAC	12Vdc	UL,CSA	20.0*9.8*12.0
14756	RY-24W-K	繼電器	2 Form C	1A24VDC, 0.5A120VAC	24Vdc	UL,CSA	20.0*9.8*12.0
14754	RY-5W-K	繼電器	2 Form C	1A 24VDC, 0.5A120VAC	5Vdc	UL,CSA	20.0*9.8*12.0

胜特力材料有限公司
●服務專線: 886-3-5753170
●24小時傳真：886-3-5753172
●E-mail: sale@100y.com.tw

WWW.100Y.COM.TW

深圳胜特力电子有限公司
●服務專線：86-755-83298787
●24小時傳真：86-755-83640655
●Email: 100y@163.com