


# RELAYS & SOLENIIDS

## Bestar-PCB繼電器 Bestar-PCBRelays

詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)




**FEATURES**  
 SinglepoleDoublethrow(1FormC)  
 Smallsize(15.5\*10.5\*11.3mm)  
 Powerconsumptionofstandardtype360mWandhighsensitivity  
 type200mW  
 DILterminal  
 Application:OAEquipment,Securityalarmsystems,and  
 Telecommunicationequipmentetc...




PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	OutlineLxWxH
2891	BS-102-12	Bsetar	繼電器	1 Form C 1A	120Vac/2A24Vdc	12Vdc	UL,CSA	15.5*10.5*11.3
2890	BS-102-5	Bsetar	繼電器	1 Form C 1A	120Vac/2A24Vdc	5Vdc	UL,CSA	15.5*10.5*11.3

## Matsushita-PCB繼電器 Matsushita-PCBRelays


詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)




**FEATURES**  
 Latchingtypesavailable  
 WideswitchingrangeFrom100μA100mVDCto4A250VAC  
 LowthermalelectromotiveforceApprox.3μV  
 Dual-In-Linepackagingarrangement  
 Ambertypesavailable  
 Highsensitivityinsmallsize100mWpick-upand200mWnominaloperatingpower  
 Avarietyofcontactarrangements2FormA2FormB,3FormA1FormB,4FormA  
 HighshockandvibrationresistanceShock:50GVibration:10to55Hzatdouble  
 amplitudeof3mm.118inch



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	CoilVoltage	OutlineLxWxH
12955	S4E-DC24V	MATSUSHITA	PCB繼電器	4A/250V3A/30VDC	S4E	24VDC	27*12*10mm



**FEATURES**  
 2FormCcontact  
 Highsensitivity-200mWnominaloperatingpower  
 Highbreakdownvoltage:1500VFCCsurgebetweenopencontacts  
 DIP-2Ctypematching16pinICsocket  
 Sealedconstruction




Part No.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22581	DS2Y-S-DC3V	MATSUSHITA	MINIATURE RELAY	0.3~2.10	DS2Y	2 Form C	45ohm	20*9.9*9.3

## TTI-PCB繼電器 TTI-PCBRelays

詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)




**MAINFEATURES**  
 Ultraminaturizeddesign,extremelylightweight  
 30Amaximumcontinuouscurrent  
**APPLICATIONS**  
 Motorcontrol  
 Lamp control  
 Intervalwipercontrol  
 Rear windowandseatheating



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22857	TR20-12D-SC-CL	TTI	TTIRelay	25A/14VDC	TR20	1 From C	12VDC	CUL	12* 9.5mm



**MAINFEATURES**  
 TR72seriesrelaycoversswitchingcapacityfromdrycircuitby10Ato  
 complywithuser'swideselection.  
 UL,CSArecognized.  
 2.54mmterminalpitchemployment equaltol.C.terminalpitch.  
 Employmentofsuitableplasticmaterialstobeappliedtohightemperature  
 andvariouschemicalsolutions.  
 Completeprotectiveconstructionfromdustandsolderingflux.Ifrequired.  
 Plastic epoxyresinsealedtypeisavailableforwashingprocedure.  
**APPLICATIONS**  
 CoolingAppliance,airconditioner,audioequipment,domesticappliance,  
 carcontrolunit,etc.

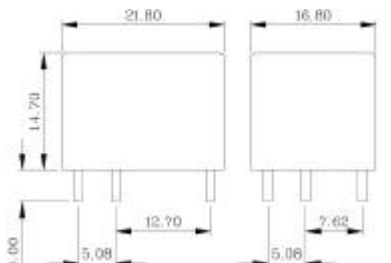

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22858	TR72-12D-FB-C	TTI	TTI Relay	10A/28VDC	TR72	1 Form C	12VDC	CUL	21.8*16.8*14.7
22859	TR72-12D-SB-C	TTI	TTI Relay	10A/28VDC	TR72	1 From C	12VDC	CUL	21.8*16.8*14.7
22860	TR72-24D-SB-C	TTI	TTI Relay	10A/28VDC	TR72	1 From C	24VDC	CUL	21.8*16.8*14.7
22862	TR72-5D-SB-C	TTI	TTI Relay	10A/28VDC	TR72	1 From C	5VDC	CUL	21.8*16.8*14.7
22863	TR72-6D-SB-C	TTI	TTI Relay	10A/28VDC	TR72	1 From C	6VDC	CUL	21.8*16.8*14.7
22864	TR72-9D-SB-C	TTI	TTI Relay	10A/28VDC	TR72	1 From C	9VDC	CUL	21.8*16.8*14.7

