

# RELAYS & SOLENIIDS



**MAINFEATURES**

Subminiature,LightWeight  
BigGapTypeAvailableforHeavyMotorLoad  
Switching  
ImprovedResistancetoShockandVibration  
HighContactCurrentCapacity  
Automotive-Orienteddesign

**APPLICATIONS**

IntervalWipers  
DoorLock  
WindowLifter  
AlarmSystem  
WiperMotorReverse  
FuelPumpControl  
BeltTensionAdjustment



PartNo.	ProductNo.	Manuf.	Description	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22865	TR81-12VDC-SC-C	TTI	TTI Relay	TR81	1 From C	12VDC	15.7*12.3*14
22866	TR81-24VDC-SC-C	TTI	TTI Relay	TR81	1 From C	24VDC	15.7*12.3*14
22867	TR81-9VDC-SC-C	TTI	TTI Relay	TR81	1 From C	9VDC	15.7*12.3*14




**MAINFEATURES**

Upto30AswitchinginSPSTand20AswitchinginSPDTarrangements.  
Availableasanopen-framereley,withanimmersioncleanable,plastic sealedcase.  
MeetULFIInsulationclass.

**APPLICATIONS**

Userforpowerswitching,ElectricalHeater,ventilator,Airconditioning, Refrigerating,AutomobileandHouse-holdAppliance.

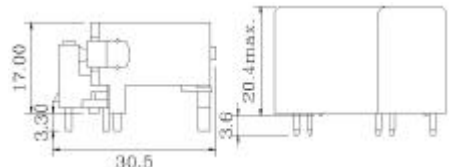

Part No.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22868	TR90-12D-C-A	TTI	TTI Relay	30A/14VDC	TR90	1 From A	12VDC	30*24.3*19.5
22869	TR90-12D-C-C	TTI	TTI Relay	10A/14VDC	TR90	1 From C	12VDC	
22871	TR90-12D-SB-A4	TTI	TTI Relay	30A/14VDC	TR90	1 From A	12VDC	
22872	TR90-12D-SC-A	TTI	TTI Relay	30A/14VDC	TR90	1 From A	12VDC	30*24.3*19.5
22873	TR90-24D-SC-A	TTI	TTI Relay	30A/14VDC	TR90	1 From A	24VDC	30*24.3*19.5
22874	TR90-24D-SC-C	TTI	TTI Relay	10A240VAC/28VDC	TR90	1 From C	24VDC	30*24.3*19.5
22875	TR90-48D-SC-A	TTI	TTI Relay	30A240VAC/28VDC	TR90	1 From A	48VDC	30*24.3*19.5




**MAINFEATURES**

SPST-NO/NCandSPDTconfigurations.  
2.5KVdielectriccoiltocontacts.  
AmbientTemperatureofCLASSB:-55~85  
AmbientTemperatureofCLASSF:-55~105  
CLASSBandCLASSFversionavailable..

**APPLICATIONS**

Userforpowerswitching,ElectricalHeater,ventilator,Airconditioning, Refrigerating,AutomobileandHouse-holdAppliance.

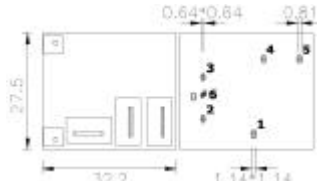

Part No.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22877	TR91-12D-SC-A	TTI	TTI Relay	30A/240VAC	TR91	1 From A	12VDC	32.2*27.5*28
22878	TR91-24D-SC-C	TTI	TTI Relay	15A/240VAC	TR91	1 From C	24VDC	32.2*27.5*28
22879	TR91F-12D-SC-C	TTI	TTI Relay	20A/240VAC	TR91F	1 From C	12VDC	50.3*27.5*28



**MAINFEATURES**

Smallsize,heavyduty, capableof40A.  
Lowcontactsvoltage drop( 3mV/A),reducecircuitconsumptionand contactsnoise.  
Contactstructure,performancereliable,withplug-inpins.bracketmodel available,handlewithease.

**APPLICATIONS**

Carcompressor,light,starter.horn.Automaticdevices,communication equipment,controlandswitch,etc.



Part No.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22880	TR93-12D-PC-A	TTI	TTI Relay	40A/14VDC	TR93	1 From A	12VDC	28*28*25mm
22882	TR93-12D-SC-A	TTI	TTI Relay	40A/14VDC	TR93	1 From A	12VDC	28*28*25mm
22883	TR93-12D-SC-C	TTI	TTI Relay	30A/14VDC	TR93	1 From C	12VDC	28*28*25mm
22884	TR93-24D-PC-C	TTI	TTI Relay	30A/14VDC	TR93	1 From C	24VDC	28*28*25mm
22885	TR93-24D-SC-C	TTI	TTI Relay	30A/14VDC	TR93	1 From C	24VDC	28*28*25mm
22886	TR93F-12D-SC-C	TTI	TTI Relay	30A/14VDC	TR93F	1 From C	12VDC	28*28*41mm
22887	TR93F-12VDC-SC-A	TTI	TTI Relay	40A/14VDC	TR93F	1 From A	12VDC	28*28*41mm
22888	TR93F-24D-SC-A	TTI	TTI Relay	40A/14VDC	TR93F	1 From A	24VDC	28*28*41mm



**MAINFEATURES**

Plug-Interminals,easytohandleworldwidechangeable,withISOsocket.  
1FormA.  
Optionalmountingbracket.  
Smallsize,highcapacity, ratedload70A.

UsageofrelayincarCompressorLightStarterHorn

**APPLICATIONS**

FordirectconnectionwithCellMotors,Transmission,etc.and Anti-LockingBrakeSystem.



詳細產品規格--請點擊[www.100y.com.tw](http://www.100y.com.tw)

