

RELAYS & SOLENIIDS

Part No.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22889	TR94-12D-PC-A	TTI	TTI Relay	70A/14VDC	TR94	1 From A	12VDC	30*30*25mm
22890	TR94-12D-PC-C	TTI	TTI Relay	70A/14VDC	TR94	1 From C	12VDC	30*30*25mm
22892	TR94-12D-SC-A	TTI	TTI Relay	70A/14VDC	TR94	1 From A	12VDC	30*30*25mm
22895	TR94-24D-PC-A	TTI	TTI Relay	70A/14VDC	TR94	1 From A	24VDC	30*30*25mm
22896	TR94-24D-PC-C	TTI	TTI Relay	70A/14VDC	TR94	1 From C	24VDC	30*30*25mm




MAINFEATURES

Smallsizeandlowcost.
Lowcoilpowerconsumption.
PCBmounting.
Switchingcapacityfrom1Ato5A.
Sealedtypeavailable.

APPLICATIONS

Audioequipment.
Communicationequipment.
Remotecontrol.
Acousticcontrolledtoys.



Part No.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22897	TR99-12VDC-SB-CD	TTI	TTI Relay	5A/28VDC	TR99	DPDT	12VDC	21.6*16*16.5
22901	TR99-24VDC-SB-CD	TTI	TTI Relay	5A/28VDC	TR99	DPDT	24VDC	21.6*16*16.5
22903	TR99-5VDC-SB-CD	TTI	TTI Relay	5A/28VDC	TR99	DPDT	5VDC	21.6*16*16.5
22904	TR99-9VDC-SB-CD	TTI	TTI Relay	5A/28VDC	TR99	DPDT	9VDC	21.6*16*16.5




MAINFEATURES

SmallsizeandlightweightoffershighdensityP.C. Boardtechnique.
Freefromdust,gases,humidity,etc.byemploymentofglasstubesealed reedswitchforhighreliabilitycontactperformance.
Switchingcapacityfromdrycircuituseby1Aselectableto complywith wideapplications.
Fastresponsein addition to short bouncing time to applications associated with semiconductors like transistors, I.C.'s.

APPLICATIONS

Communciequipment, domestic appliance, security equipment, office automation machinf, etc.

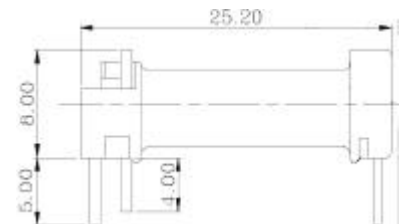

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	CoilVoltage	OutlineLxWxH
22905	TRA-1050(ohm)12VDC	TTI	TTI Relay	0.5A/24VDC	TRA	12VDC	25.2*8.1*9.0mm
22906	TRA-2080(ohm)24VDC	TTI	TTI Relay	0.5A/24VDC	TRA	24VDC	25.2*8.1*9.0mm
22907	TRA-250(ohm)5VDC	TTI	TTI Relay	0.5A/24VDC	TRA	5VDC	25.2*8.1*9.0mm
22910	TRA-250(ohm)6VDC	TTI	TTI Relay	0.5A/24VDC	TRA	6VDC	25.2*8.1*9.0mm
22911	TRA-500(ohm)5VDC	TTI	TTI Relay	0.5A/24VDC	TRA	5VDC	25.2*8.1*9.0mm
22912	TRA-700(ohm)9VDC	TTI	TTI Relay	0.5A/24VDC	TRA	9VDC	25.2*8.1*9.0mm




MAINFEATURES

SubminiatureType.
SilverorSilverAlloyContactswithGoldPlated.
LowDissipation.
SealedTypeAvailable.
DesignconformstoreignsafetystandardUL.

APPLICATIONS

MicroprocessorControl, StoreProgramExchangerandHousehold Appliance.



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22913	TRB-12D-SA-CL0.2W	TTI	TTI Relay	1A 125VAC/30VDC	TRB	1 FromC	12VDC	CUL	15.5*10.7*11.8
16377	TRB-12D-SB3-CD	TTI	TTI Relay	1A 120VAC/24VDC	TRB	1 FromC	12VDC	UL,CUL	15.5*10.7*15.3
22914	TRB-12D-SB3-CD0.36W	TTI	TTI Relay	3A 125VAC/30VDC	TRB	1 FromC	12VDC	CUL	15.5*10.7*11.8
22919	TRB-24D-SA-CL	TTI	TTI Relay	1A 125VAC/30VDC	TRB	1 FromC	24VDC	CUL	15.5*10.7*11.8
22915	TRB-24D-SB3-CD0.36W	TTI	TTI Relay	3A 125VAC/30VDC	TRB	1 FromC	24VDC	CUL	15.5*10.7*11.8
22920	TRB-3D-SB3-CD	TTI	TTI Relay	3A 125VAC/30VDC	TRB	1 FromC	3VDC	CUL	15.5*10.7*11.8
22916	TRB-5D-SB3-CD0.36W	TTI	TTI Relay	3A 125VAC/30VDC	TRB	1 FromC	5VDC	CUL	15.5*10.7*11.8
22921	TRB-6D-SA-CD	TTI	TT Relay	1A 125VAC/30VDC	TRB	1 FromC	6VDC	CUL	15.5*10.7*11.8
22917	TRB-6D-SB3-CD0.36W	TTI	TTI Relay	3A 125VAC/30VDC	TRB	1 FromC	6VDC	CUL	15.5*10.7*11.8
22918	TRB-9D-SB3-CD0.36W	TTI	TTI Relay	3A 125VAC/30VDC	TRB	1 FromC	9VDC	CUL	15.5*10.7*11.8




MAINFEATURES

SubminiatureType.
SilverorSilverAlloyContactswithGoldPlated.
LowDissipation.
SealedTypeAvailable.
DesignconformstoreignsafetystandardUL.

APPLICATIONS

MicroprocessorControl, StoreProgramExchangerandHousehold Appliance.

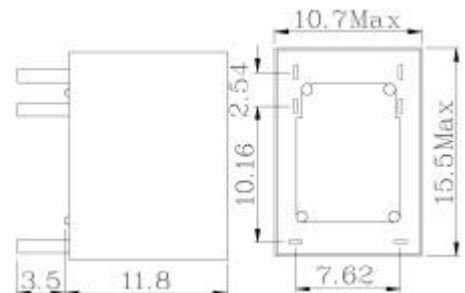

詳細產品規格--請點擊www.100y.com.tw

