

**GTP-060A-2, GTP-100A-2, 150A-2 & GTP-250A-2 Probe :**

Position  $\times 10$

Attenuation Ratio

10:1

Bandwidth

DC to 60MHz for GDS-806S/C

DC to 100MHz for GDS-810S/C

DC to 150MHz for GDS-820S/C

DC to 250MHz for GDS-840S/C

Rise Time

5.8ns for GDS-806S/C;

3.5ns for GDS-810S/C;

2.3ns for GDS-820S/C

1.4ns for GDS-840S/C

Input Resistance

10M $\Omega$  when used with oscilloscope  
which have 1M $\Omega$  input

Input Capacitance

Approx. 17pF

Compensation Range

10 to 35pF

Maximum Input Voltage

500V CAT I,

300V CAT II (DC + peak AC )

Derating with frequency.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



# Introduction


The GTP-250A-2 is a passive high impedance oscilloscope probe designed and calibrated for use with instruments having an input impedance of 1 MΩ shunted by 20 pF. However, it may be compensated for use with instruments having an input capacitance of 10 to 35 pF. The probe incorporates a two position slide switch in the head which selects attenuation of x1, x10 position.

# Safety Instructions

- Review the following safety precautions to avoid injury and prevent damage to this product or any products connected to it.
- To avoid potential hazards, use this product only as specified.
  - The common terminal is at ground potential. Do not connect the common terminal to elevated voltages.
  - Do not operate in an explosive atmosphere.
  - Keep product surfaces clean and dry.
  - If your probe requires cleaning, disconnect it from the instrument and clean it with mild detergent and water. Make sure the probe is completely dry before reconnecting it to the instrument.

# Compensation Adjustment

The following adjustment is required whenever the probe is transferred from one oscilloscope or input channel to another. Connect the probe to the oscilloscope and select x10 position on the probe switch. Apply a 1KHz square wave to the probe tip, or connect to the cal socket on the oscilloscope to display a few cycles of the waveform and adjust the trimmer located in the BNC plug for a flat topped square wave.

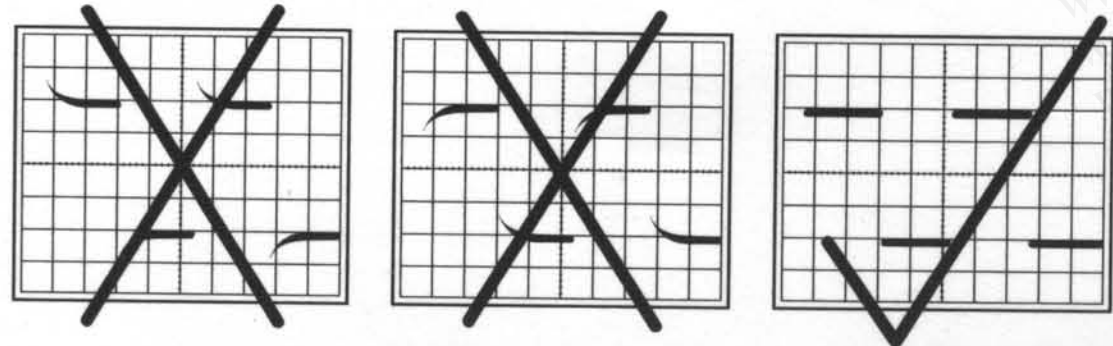

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Specifications	
<b>Position X10</b>	
Attenuation Ratio	10:1
Bandwidth	DC to 250MHz
Rise Time	1.4nS
Input Resistance	10MΩ when used with oscilloscopes which have 1MΩ input.
Input Capacitance	Approx. 17 pF
Compensation Range	10 to 35 pF
Max. Input Voltage	500V CAT I, 300V CAT II (DC + peak AC) derating with frequency (see Fig.1)
<b>Position X1</b>	
Attenuation Ratio	1:1
Bandwidth	DC to 6MHz
Rise Time	58nS
Input Resistance	1MΩ (oscilloscope input resistance)
Input Capacitance	47 pF plus oscilloscope capacitance
Max. Input Voltage	300V CAT I, 150V CAT II (DC + peak AC) derating with frequency.
Operating Temperature	-10°C to +55°C
Humidity	85% RH or less (at 35°C)
Safety	Meets EN61010-031 CAT II
Cable Length	1.2 Meter

# Accessories

Description	Part No.
Channel Identifier Clip	PA-105
Sprung Hook	PA-106
Ground Lead	PA-107
Insulating Tip	PA-108
IC Tip	PF-902
Adjusting Tool	PF-903
Sprung Earth Tip	PF-905