

RELAYS & SOLENIIDS

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22961	TRD-12D-FC-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	12VDC	CUL	19.0*15.5*15.0mm
22962	TRD-12D-SB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	12VDC	CUL	19.0*15.5*15.0mm
22965	TRD-24D-FB-AL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From A	24VDC	CUL	19.0*15.5*15.0mm
22966	TRD-24D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	24VDC	CUL	19.0*15.5*15.0mm
22967	TRD-24D-FC-CD	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	24VDC	CUL	19.0*15.5*15.0mm
22968	TRD-24D-SB-CD	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	24VDC	CUL	19.0*15.5*15.0mm
22969	TRD-3D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	3VDC	CUL	19.0*15.5*15.0mm
22970	TRD-48D-FB-AL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From A	48VDC	CUL	19.0*15.5*15.0mm
22971	TRD-48D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	48VDC	CUL	19.0*15.5*15.0mm
12812	TRD-5D-FB-CL	TTI	TTI Relay	6A/250VAC12A/120VDC	TRD	1PST	5VDC	UL,CSA,VDE,	19.0*15.5*15.0mm
22972	TRD-5D-FC-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	5VDC	CUL	19.0*15.5*15.0mm
22973	TRD-5D-SB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	5VDC	CUL	19.0*15.5*15.0mm
22974	TRD-6D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	6VDC	CUL	19.0*15.5*15.0mm
12813	TRD-9VDC-FB-CL	TTI	TTI Relay	6A/250VAC12A/120VDC	TRD	1PST	9VDC	UL,CSA,VDE,	19.0*15.5*15.0mm
22975	TRDT-24D-FC-AL	TTI	TTI Relay	6A 240VAC/28VDC	TRDT	1 From A	24VDC	CUL	19.0*15.5*15.0mm




MAINFEATURES

HighSensitivity:150mw.
1 PoleConfigurations.
SmallSizeAt12.5Lx7.5Wx0Hmm.
Sealedtypesavailable.

APPLICATIONS

Telecommunication,Domesticappliances,OfficeMachines,audio e q uipment.



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22976	TRG5-12D-SA-CL0.15W	TTI	TTI Relay	0.5A 125VAC/24VDC	TRG5	SPDT	12VDC	12.5*7.5*10.0
22977	TRG5-12D-SE-CL	TTI	TTI Relay	0.5A 125VAC/24VDC	TRG5	SPDT	12VDC	12.5*7.5*10.0
22978	TRG5-24D-SA-CL	TTI	TTI Relay	0.5A 125VAC/24VDC	TRG5	SPDT	24VDC	12.5*7.5*10.0
22979	TRG5-3D-SA-CL0.15W	TTI	TTI Relay	0.5A 125VAC/24VDC	TRG5	SPDT	3VDC	12.5*7.5*10.0
22980	TRG5-5D-SA-CL0.15W	TTI	TTI Relay	0.5A 125VAC/24VDC	TRG5	SPDT	5VDC	12.5*7.5*10.0
22981	TRG5-9D-SA-CL0.15W	TTI	TTI Relay	0.5A 125VAC/24VDC	TRG5	SPDT	9VDC	12.5*7.5*10.0




MAINFEATURES

UL,CSA&TV-5ratingrecognized.
1FormA(SPST-NO)Contact.
Heavydutyswitchingcurrentupto30A.
High inrushcurrent65A.
High surge voltage10,000V.
Smallpacking-Meethighdensitymountingrequirement.
MeetwithassociatedrequirementforUI508industrialcontrolequipment.
With4,000VACstanding.

APPLICATIONS

Usedonairconditioner,electricalheaterRemote-controlledTV,
automaticcontrolandhouseholdelectricdevice.

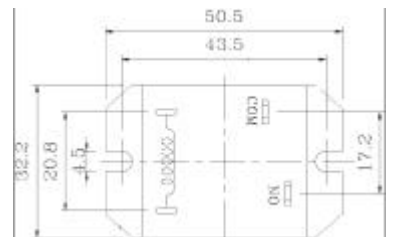

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22982	TRH-12D-C-A	TTI	TTI Relay	30A 250VAC/30VDC	TRH	1 FromA	12VDC	UL,CSA	50.0*32.2*24.1




MAINFEATURES

SlimtypeandsmalloccupyspacecanofferhighdensityP.C.B.
Technique.
Insulationdistanceof8mmmin.isdesigned.Byemploymentofinsulation
materialto meetJISinsulationclassE,dielectricstrengthof5000Vmin.
and surgeresistiveness10000min.isrealized.
LowcoilpowerconsumptiontypeofTRI-Landgeneralcoilpower
consumptiontypeofTRIarepreparedto complywithuser'swide
selctions.
Employmentofsuitableplasticmaterialstobeappliedtohightemperature
andvariouschemicalsolutions.
Completeprotectiveconstructionfromdustandsolderingflux.Ifrequired,
plastic epoxy resinsealedtypeisavailableforwashingprocedure.
TRI1Poleseriesrelaycoversswitchingcapacityfrom10Aby16Ato
complywithuser'swideselections(TRI(H)1Pole10A,TRI(E)1Pole16A)
Switchingcapacityby10Aavailablewith2transfercontactfrom.(TRI(M)2Pole5A)

APPLICATIONS

Cookingappliances,airconditioners,audioequipment,domestic appliances,etc.

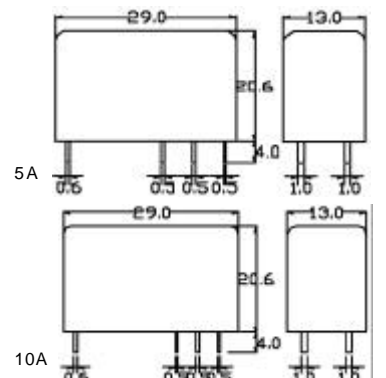

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22992	TRI-12D-FB-1CH	TTI	TTI Relay	7.5A 250VAC/30VDC	TRI	SPDT	12VDC	29.0*13.0*25.5
22983	TRI-12D-SB-1CH	TTI	TTI Relay	10A 250VAC/30VDC	TRI	SPDT	12VDC	28.9*12.6*20.6
22984	TRI-12D-SB-2ALM	TTI	TTI Relay	5A 250VAC/30VDC	TRI	DPST	12VDC	29.0*13.0*20.6
22985	TRI-12D-SB-2AM	TTI	TTI Relay	5A 250VAC/30VDC	TRI	DPST	12VDC	29.0*13.0*20.6
22986	TRI-24D-SB-1CLH	TTI	TTI Relay	10A 250VAC/30VDC	TRI	SPDT	24VDC	29.0*13.0*20.6
22987	TRI-24D-SB-2ALM	TTI	TTI Relay	5A 250VAC/30VDC	TRI	DPST	24VDC	29.0*13.0*20.6
22988	TRI-24D-SB-2CLM	TTI	TTI Relay	5A 250VAC/30VDC	TRI	DPDT	24VDC	29.0*13.0*20.6
22989	TRI-5D-SB-2CM	TTI	TTI Relay	5A 250VAC/30VDC	TRI	DPDT	5VDC	29.0*13.0*20.6

