

RELAYS & SOLENIIDS



MAINFEATURES

Longlifeandhighreliability
Strongconstructionforvibrationandshock
Approximatelythousandsforkindsareavailable dependingonthecombinationofterminals, covers,contactratings,coiletc.
Plastic-sealedtypeisavailable
Moldedmaterial:AllUL94V-0
ULRecognized

APPLICATIONS

Coiloperatedmachines
Vendingmachines
Refrigerators
Transportations
Powerstationcontrolcontrolerequipment
Officemachines
Buildingcontrolerequipment
Medicalequipment
Amusementdevices,etc.



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23036	TRL-110A-P-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	110VAC	UL	28.0*21.0*35.5mm
23037	TRL-110A-S-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	110VAC	UL	28.0*21.0*35.5mm
23038	TRL-110D-P-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	110VDC	UL	28.0*21.0*35.5mm
23039	TRL-12D-P-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	12VDC	UL	28.0*21.0*35.5mm
23040	TRL-12D-S-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	12VDC	UL	28.0*21.0*35.5mm
23041	TRL-24A-P-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	24VAC	UL	28.0*21.0*35.5mm
23042	TRL-24D-P-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	24VDC	UL	28.0*21.0*35.5mm
23043	TRL-24D-S-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	24VDC	UL	28.0*21.0*35.5mm
23044	TRL-5D-S-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	5VDC	UL	28.0*21.0*35.5mm




MAINFEATURES

SingleCONTACTanddoubleCONTACTTypesofferswitchingcapacityby 15Ainsmallsizeforexclusiveautomobilecontrolrelayswitchingboxuse. PCBboardterminal.
Simplemagneticcircuitto meetmassproductionforlowcostoffer. Standard typeisopentypewithoutdustcover. Ifdustcoverrequired, suitablecasedrelay canbeprepared.
Operatingambienttemperaturecoverfrom-40 by85 atnocurrenton relay'sCONTATS..

APPLICATIONS

Carcontrolswitchingbox(alarmsystem,automaticdoorlocking)wipermotor Reversing,windowLifter,Flashersorturningsignals,Airconditioning,Fuel pumpcontrolsystem,etc.

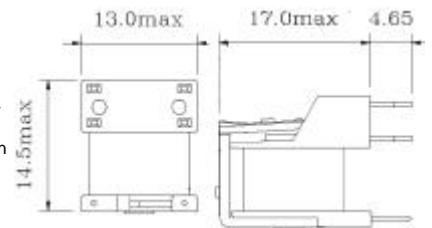

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
23045	TRM-12D-H	TTI	TTI Relay	1A 120VAC/12VDC	TRM	1 From A	12VDC	14.5*13.0*17.0mm
23046	TRM-12D-SA-SH	TTI	TTI Relay	2A 120VAC/12VDC	TRM	1 From U	12VDC	14.5*13.0*17.0mm
23048	TRM-12D-SA-SZ	TTI	TTI Relay	2A 120VAC/12VDC	TRM	1 From W	12VDC	14.5*13.0*17.0mm
23049	TRM-12D-SC-SH	TTI	TTI Relay	2A 120VAC/12VDC	TRM	1 From U	12VDC	14.5*13.0*17.0mm
23050	TRM-12D-ZF	TTI	TTI Relay	1A 120VAC/12VDC	TRM	1 From C	12VDC	14.5*13.0*17.0mm
23051	TRM-12VDC-SC-SH	TTI	TTI Relay	2A 120VAC/12VDC	TRM	1 From U	12VDC	14.5*13.0*17.0mm
23052	TRM-24VDC-SC-SH	TTI	TTI Relay	2A 120VAC/12VDC	TRM	1 From U	24VDC	14.5*13.0*17.0mm




MAINFEATURES

Subminiature,PCBMounting.
HeavyDuty,SilverAlloyContactupto30Aor45A. 1FormA,1FormBor1FormC.
Twodifferentspacingarrangementsofterminalsareavailableto meetthe worldstandards.
UsedforAutomotives,IndustrialControl,HouseholdAppliancesandHeavy Loads,etc.

APPLICATIONS

DirectionIndicators
IntervalWipersControl
FuelPumpControl
VentilationMotor
HazardLights
HeaterControl
Rear WindowHeating
AirConditioning
Centraldoorlock
Anti-lockbrakingsystem
Selftensionadjustment
Windowlifter
Seatpositioning
Flashesorturningsignals
Caralarmsystem
Initialvaluecontrol
Automaticmirroradjustment
Sliding r oof

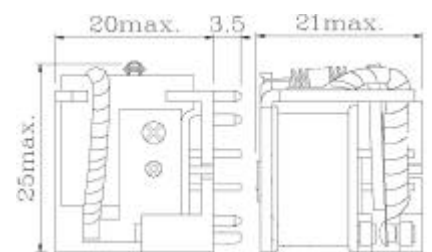

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
23054	TRP-12D-AC8	TTI	TTI Relay	45A60VAC/75VDC	TRP	1 From A	12VDC	26.5*21.5*21.5mm
23055	TRP-12D-CA8	TTI	TTI Relay	45A60VAC/75VDC	TRP	1 From C	12VDC	26.5*21.5*21.5mm
23056	TRP-12D-SA-A8	TTI	TTI Relay	45A60VAC/75VDC	TRP	1 From A	12VDC	26.5*21.5*21.5mm
23057	TRP-12D-SA-C11	TTI	TTI Relay	45A60VAC/75VDC	TRP	1 From C	12VDC	26.5*21.5*21.5mm
23058	TRP-12D-SA-C8	TTI	TTI Relay	45A60VAC/75VDC	TRP	1 From C	12VDC	26.5*21.5*21.5mm
23059	TRP-12D-SC-A11	TTI	TTI Relay	45A60VAC/75VDC	TRP	1 From A	12VDC	26.5*21.5*21.5mm
23060	TRP-12D-SC-C11	TTI	TTI Relay	45A60VAC/75VDC	TRP	1 From C	12VDC	26.5*21.5*21.5mm
23061	TRP-24D-CA8	TTI	TTI Relay	45A60VAC/75VDC	TRP	1 From C	24VDC	26.5*21.5*21.5mm
23062	TRP-24D-CC8	TTI	TTI Relay	45A60VAC/75VDC	TRP	1 From C	24VDC	26.5*21.5*21.5mm
23064	TRP-24D-SA-C11	TTI	TTI Relay	45A60VAC/75VDC	TRP	1 From C	24VDC	26.5*21.5*21.5mm
23066	TRP-24D-SA-C8	TTI	TTI Relay	45A60VAC/75VDC	TRP	1 From C	24VDC	26.5*21.5*21.5mm
23068	TRP-24D-SC-C8	TTI	TTI Relay	45A60VAC/75VDC	TRP	1 From C	24VDC	26.5*21.5*21.5mm

詳細產品規格--請點擊www.100y.com.tw

