RELAYS & SOLENIDS

MAINFEATURES
- DILPitchTerminalsHighSensitivity:0.14W NominalPower
- ConformstoFCCPart681.5KVSurgeand Dielectric1000VAC.
- MonostableorbistablerelaysSingleand doubleCoilmagnetlatchingTypeavailable

APPLICATIONS
- TelecommunicationEqupment,OfficeEquipment, SecurityAlarmSystems,Measuringinstruments, MedicalMonitoringEquipment,AudioVisual Equiment,FlightSimulator,SensorControl



DIPTYPE



SMDTYPE

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	QutlineLxWxH
23069	TRQ2-5D	TTI	TTI Relay	1A125VAC/30VDC	TRQ2	2From C	5VDC	CUL	14.2*9.3*5.3mm
23073	TRQ2S-12D	TTI	TTI Relay	1A125VAC/30VDC	TRQ2S	2From C	12VDC	CUL	14.2*9.3*5.3mm
23074	TRQ2S-5D	TTI	TTI Relay	1A125VAC/30VDC	TRQ2S	2From C	5VDC	CUL	14.2*9.3*5.3mm

MAINFEATURES
- Miniature,cost-effectiveswitchingsolution.
- Stateoftheartcapsuledesigns.
- Moldedconstructionforcompatibilitywithautomaticboardprocessing.
- Epoxy-moldeddual-in-linepackage.
- Completelywashable.

APPLICATIONS
- Measuringequipment,Communicationequipment,Controlequipment, Appliances,etc.



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	QutlineLxWxH
23075	TRR1A05D00	TTI	TTI Relay	0.5A/10VA	TRR	1A	5VDC	CUL	19.6*7.62*5.2mm
23076	TRR1A05S00D	TTI	TTI Relay	0.5ADC/10VA	TRR	1A	5VDC	CUL	19.6*7.62*5.2mm
23077	TRR1A12D00	TTI	TTI Relay	0.5ADC/10VA	TRR	1A	12VDC	CUL	19.6*7.62*5.2mm
23079	TRR1A12F00	TTI	TTI Relay	0.5ADC/10VA	TRR	1A	12VDC	CUL	19.6*7.62*5.2mm
23080	TRR1A12S00	TTI	TTI Relay	0.5ADC/10VA	TRR	1A	12VDC	CUL	19.6*7.62*5.2mm
23081	TRR1A24D00	TTI	TTI Relay	0.5ADC/10VA	TRR	1A	24VDC	CUL	19.6*7.62*5.2mm
23082	TRR1B05D00	TTI	TTI Relay	0.5ADC/10VA	TRR	1B	5VDC	CUL	19.6*7.62*5.2mm
23083	TRR1C05D00	TTI	TTI Relay	0.2ADC/3VA	TRR	1C	5VDC	CUL	19.6*7.62*5.2mm
23084	TRR1C05S00	TTI	TTI Relay	0.2ADC/3VA	TRR	1C	5VDC	CUL	19.6*7.62*5.2mm
23085	TRR1C12D00	TTI	TTI Relay	0.2ADC/3VA	TRR	1C	12VDC	CUL	19.6*7.62*5.2mm
23086	TRR2A05D	TTI	TTI Relay	0.5ADC/10VA	TRR	2A	5VDC	CUL	19.6*7.62*5.2mm
23087	TRR2A12D	TTI	TTI Relay	0.5ADC/10VA	TRR	2A	12VDC	CUL	19.6*7.62*5.2mm



MAINFEATURES
- 2FormC(DPDT)bifurcated-cross-barcontacts.
- GoldCladsilvercontact.
- Dip-2Ctypematching16pinICsocket.
- Sealedtypeavailable.
- ULreaognized.
- Highsensitivity.
- CoilPowerConsumption:0.15~0.51W

APPLICATIONS
- TelecommunicationEqupment,domesticappliances,officemachines,audio equipment,etc.

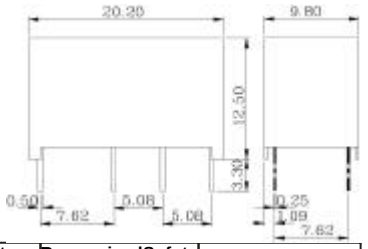

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	QutlineLxWxH
23088	TRS-12VDC-SB-L15	TTI	TTI Relay	0.5A 125VAC/28VDC	TRS	DPDT	12VDC	CUL	20.8*10.0*12.0mm
23089	TRS-12VDC-SB-L20	TTI	TTI Relay	0.5A 125VAC/28VDC	TRS	DPDT	12VDC	CUL	20.8*10.0*12.0mm
23090	TRS-24VDC-SB-L20	TTI	TTI Relay	0.5A 125VAC/28VDC	TRS	DPDT	24VDC	CUL	20.8*10.0*12.0mm
23091	TRS-3VDC-SB-L15	TTI	TTI Relay	0.5A 125VAC/28VDC	TRS	DPDT	3VDC	CUL	20.8*10.0*12.0mm
23092	TRS-48VDC-SB-D50	TTI	TTI Relay	0.5A 125VAC/28VDC	TRS	DPDT	48VDC	CUL	20.8*10.0*12.0mm
23093	TRS-5VDC-SA-L15	TTI	TTI Relay	0.5A 125VAC/28VDC	TRS	DPDT	5VDC	CUL	20.8*10.0*12.0mm
23094	TRS-5VDC-SB-L15	TTI	TTI Relay	0.5A 125VAC/28VDC	TRS	DPDT	5VDC	CUL	20.8*10.0*12.0mm
23096	TRS-5VDC-SB-L20	TTI	TTI Relay	0.5A 125VAC/28VDC	TRS	DPDT	5VDC	CUL	20.8*10.0*12.0mm
23098	TRS-6VDC-SB-L20	TTI	TTI Relay	0.5A 125VAC/28VDC	TRS	DPDT	6VDC	CUL	20.8*10.0*12.0mm
23099	TRS-9VDC-SB-L20	TTI	TTI Relay	0.5A 125VAC/28VDC	TRS	DPDT	9VDC	CUL	20.8*10.0*12.0mm

MAINFEATURES
- Highcontactcapacity:12A,(15AforTUVapproved)
- UL/CSA,TUVrecognized,TRUT(TV-5Approved).
- Employmentofsuitableplasticmaterialstobe appliedtohightemperatureandvariouschemicalsolution.
- Sealedtypeavailable.

APPLICATIONS

TRU:
- Homeappliance,airconditioner,heater,etc.
- AutomotivePower-window,carantenna,door-lock,etc.
- Officemachine,facsimile,etc.
- Vendingmachine.

TRUT:
- RemotecontrolTVreceivers,monitor displays,audioequipmenthighrushing currentuseapplication.


1FromA


1FromC

詳細產品規格--請點擊www.100y.com.tw