

RELAYS & SOLENIIDS

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23101	TRU-12D-FB-AL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromA	12VDC	UL,CSA	20.2*16.5*20.2mm
23102	TRU-12D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromC	12VDC	UL,CSA	20.2*16.5*20.2mm
23103	TRU-12D-FC-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromC	12VDC	UL,CSA	20.2*16.5*20.2mm
23104	TRU-12D-SB-AL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromA	12VDC	UL,CSA	20.2*16.5*20.2mm
23105	TRU-12D-SB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromC	12VDC	UL,CSA	20.2*16.5*20.2mm
23106	TRU-24D-FB-AL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromA	24VDC	UL,CSA	20.2*16.5*20.2mm
23107	TRU-24D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromC	24VDC	UL,CSA	20.2*16.5*20.2mm
23108	TRU-24D-FC-CD	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromC	24VDC	UL,CSA	20.2*16.5*20.2mm
23109	TRU-24D-SB-CD	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromC	24VDC	UL,CSA	20.2*16.5*20.2mm
23110	TRU-24D-SB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromC	24VDC	UL,CSA	20.2*16.5*20.2mm
23111	TRU-3D-SB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromC	3VDC	UL,CSA	20.2*16.5*20.2mm
23112	TRU-48D-FB-AL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromA	48VDC	UL,CSA	20.2*16.5*20.2mm
23113	TRU-5D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromC	5VDC	UL,CSA	20.2*16.5*20.2mm
23114	TRU-5D-SB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromC	5VDC	UL,CSA	20.2*16.5*20.2mm
23115	TRU-6D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromC	6VDC	UL,CSA	20.2*16.5*20.2mm
23116	TRU-9D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 FromC	9VDC	UL,CSA	20.2*16.5*20.2mm



MAINFEATURES
 Highcapacitytype(16A)available.
 Highsensitivity0.2W(1FormA).
 Flattype:LxWxH=16.5mmx2.2mmx1.2mm.
APPLICATIONS
 Homeappliances:Airconditioner,heater,etc.
 Automotive: Powersupplyfor carstereoand
 airconditioner.



1 FromA




1 From C

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23914	TRV-12VDC-SC-CD	TTI	TTI Relay	16A 125VAC/30VDC	TRV	1 From C	24VDC	CUL	22.0*16.6*11.0mm
23117	TRV-24VDC-SC-AL	TTI	TTI Relay	16A 125VAC/30VDC	TRV	1 From A	24VDC	CUL	22.0*16.6*11.0mm
23118	TRV-24VDC-SC-CD	TTI	TTI Relay	16A 125VAC/30VDC	TRV	1 From C	24VDC	CUL	22.0*16.6*11.0mm
23119	TRV-48D-SC-AL0.25W	TTI	TTI Relay	16A 125VAC/30VDC	TRV	1 From A	48VDC	CUL	22.0*16.6*11.0mm
23120	TRV-48VDC-SC-AL	TTI	TTI Relay	16A 125VAC/30VDC	TRV	1 From A	48VDC	CUL	22.0*16.6*11.0mm
23121	TRV-9VDC-SC-CD0.45W	TTI	TTI Relay	16A 125VAC/30VDC	TRV	1 From C	9VDC	CUL	22.0*16.6*11.0mm



MAINFEATURES
 Longlifeandhighreliability
 Strongconstructionforvibrationandshock
 Approximatelythousandsforkindsareavailable
 dependingonthecombinationofterminals,
 covers,contactratings,coiletc.
 Moldedmaterial:AllUL94V-0

APPLICATIONS
 Powerstationcontrolequipments
 Transportations
 Refrigerators
 Coiloperatedmachines
 Officemachines
 Buildingequipments
 Medicaequipments
 Amusementdevices,etc.




PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23122	TRY-110A-P-4C	TTI	TTI Relay	5A 250VAC/30VDC	TRY	4PDT	110VAC	UL	27.3*21.0*35.5mm
23123	TRY-110A-S-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	110VAC	UL	27.3*21.0*35.5mm
23124	TRY-12D-P-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	12VDC	UL	27.3*21.0*35.5mm
23125	TRY-12D-S-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	12VDC	UL	27.3*21.0*35.5mm
23126	TRY-12D-S-4C	TTI	TTI Relay	5A 250VAC/30VDC	TRY	4PDT	12VDC	UL	27.3*21.0*35.5mm
23127	TRY-220A-S-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	220VAC	UL	27.3*21.0*35.5mm
23128	TRY-24A-S-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	24VAC	UL	27.3*21.0*35.5mm
23130	TRY-24D-P-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	24VDC	UL	27.3*21.0*35.5mm
23131	TRY-24D-P-4C	TTI	TTI Relay	5A 250VAC/30VDC	TRY	4PDT	24VDC	UL	27.3*21.0*35.5mm
23132	TRY-24D-S-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	24VDC	UL	27.3*21.0*35.5mm
23133	TRY-24D-S-4CL	TTI	TTI Relay	5A 250VAC/30VDC	TRY	4PDT	24VDC	UL	27.3*21.0*35.5mm

NEC-PCB繼電器 NEC-PCBRelays

詳細產品規格--請點擊www.100y.com.tw



FEATURES
 Compactandlightweight
 2formCcontactarrangement
 Lowpowerconsumption
 Reducedmountingspace:15mmx7.5mm
 High-breakdownvoltageofcoilocontacts:1500Vac,2500V
 (risetime:2μs,falltime:10μs)
 CapableofHigh-powerswitching:700Vac,4.2A,4timesin
 caseofaccident
 ULrecognized(E73266).CAScertified(LR46266)

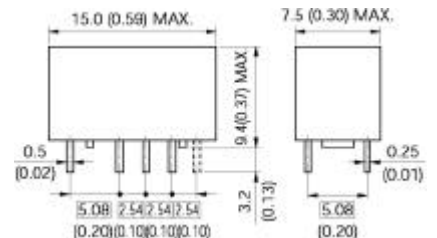

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22054	EC2-5NJ	NEC	"NEC" 繼電器	60W,125VA220Vdc,250Vac2A	EC2	1 FromC	5VDC	UL,CSA	15*7.5*9.4mm

