

RELAYS & SOLENIIDS

OEG-PCB繼電器 OEG-PCBRelays

詳細產品規格--請點擊www.100y.com.tw




OMI/OMIHSeriesFeatures
MeetUL508,VDE0435andSEMKO requirements.
1FormAand1FormCcontactarrangements.
Immersioncleanable,sealedversionavailable.
Meets5,000Vdielectricvoltagebetweencoil andcontacts.
Meet10,000Vsurgevoltagebetweencoiland contacts(1.2/50 μ s).



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
14875	OMI-SS-212DM	OEG	PCB繼電器	5A250VAC/28VDC	OMI-SS	1 Form A, 1 Form C	12Vdc	CSA,UR,VDE,S	29.2*12.8*20.6
23942	OMI-SS-212L	OEG	PCB繼電器	5A250VAC/28VDC	OMI-SS	1 Form A, 1 Form C	12Vdc	CSA,UR,VDE,S	29.2*12.8*20.6
23963	OMI-SS-224DM	OEG	PCB繼電器	5A250VAC/28VDC	OMI-SS	1 Form A, 1 Form C	24Vdc	CSA,UR,VDE,S	29.2*12.8*20.6
23943	OMI-SS-224L	OEG	PCB繼電器	5A250VAC/28VDC	OMI-SS	1 Form A, 1 Form C	24Vdc	CSA,UR,VDE,S	29.2*12.8*20.6
14877	OMIH-SS-112L	OEG	PCB繼電器	16A 240VAC/240DC	OMIH-SS	1 Form A, 1 Form C	12Vdc	CSA,UR,VDE	29.2*12.8*20.6
23945	OMIH-SS-124L	OEG	PCB繼電器	16A 240VAC/240DC	OMIH-SS	1 Form A, 1 Form C	24Vdc	CSA,UR,VDE	29.2*12.8*20.6




Features
MeetUL508,CSAandTUVrequirements.
1FormAand1FormCcontactarrangements.
Immersioncleanable,sealedversionavailable.
Meets5,000Vdielectricvoltagebetweencoilandcontacts.
Meet10,000Vsurgevoltagebetweencoilandcontacts(1.2/50 μ s).
QuickConnectTerminaltypeavailable(OZF).
ULTV-8ratingavailable(OZT).






PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23971	OZ-SS-112LM1	OEG	PCB繼電器	16A 240VAC	OZ-SS	1 Form A	12Vdc	CSA,UR,TUV	29.2*12.8*20.6mm
23974	OZ-SS-124LM1	OEG	PCB繼電器	16A 240VAC	OZ-SS	1 Form A	24Vdc	CSA,UR,TUV	29.2*12.8*20.6mm

OKITA-PCB繼電器 OKITA-PCBRelays

詳細產品規格--請點擊www.100y.com.tw



Characteristics:
Highspeedasanobjectforhighfrequency
Bestfortheasterwhichneedsspeed
Properties:
Environmental:Ambienttemperature:
-10to+60degreesCelsius
Shock:20G(0to2kHz,1.5mm maximum)
Vibration:30G(11ms,1/2sinewave)

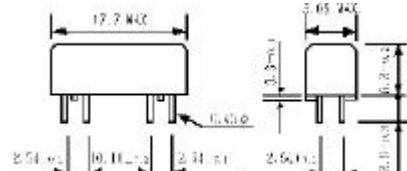

詳細產品規格--請點擊www.100y.com.tw

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
13262	HFS-1A-05	OKITA	水銀繼電器 (OKITA)	100Vdc/0.5A	HFSS	1A	5V/31.3mA	20*5*5mm
21953	HFSS-1A-05WL	OKITA	水銀繼電器 (OKITA)	100Vdc/0.5A	HFS	1A	5V/31.3mA	17.7*5.05*5.3mm
12601	MTTP-102S	OKITA	PCB繼電器	2 A	MTTP	1FormC	12VDC	25*8*8mm

TOWARD-PCB繼電器 TOWARD-PCBRelays

詳細產品規格--請點擊www.100y.com.tw



PartNo.	ProductNo.	Manuf.	Description	ContactRating	CoilVoltage
23904	P-24	TOWARD	繼電器	1A30VDC,0.5A125VAC	5Vdc

詳細產品規格--請點擊www.100y.com.tw

