

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

HC-31

DEMAGNETIZER

- ☐ 100V
- ▨ 110/120V
- 220/230/240V

Possible to quick demagnetization against the target object.




Features

- ☆ Hold down a switch and distance this demagnetizer from a target object. At that time, the target object demagnetize.
(When press a push switch, this demagnetizer generate the magnetism.)
- ☆ This demagnetizer is usable in both lengthwise direction and a cross direction.
- ☆ Because small and light, it is convenient for field maintenance and repair.
- ☆ Built-in thermo fuse (130°C).
For prevention against the overheat.

Specifications

Maximum magnetic flux density	68mT(100V 50Hz)
	56mT(100V 60Hz)
Continuous use times	2.5minutes
Dissolution temperature of Thermo fuse	130°C
Power source	100V 50/60Hz
Power consumption	12W (100V)
Dimensions	34 mm(W)X59 mm(H)X216 mm (D)
Weight	930g

CAUTION !
 Don't use continuously for more than 2.5minutes.

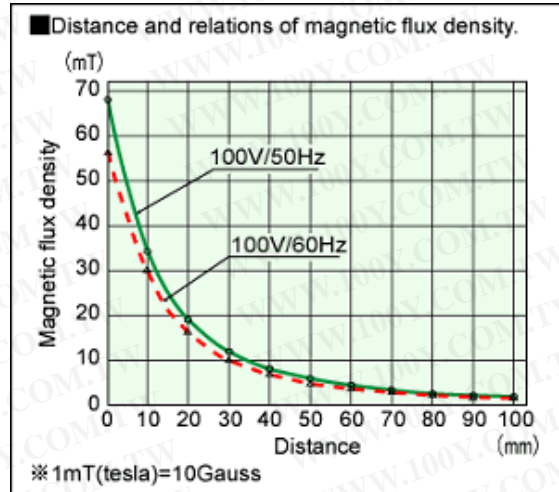

This demagnetizer is usable for various demagnetization purposes.



As a repair tool for a irregular color area by influence of geomagnetism of CRT-based TV and PC.



For a demagnetization of the small parts which became magnetized.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



For a demagnetization of screw drivers, tweezers and other small tools which became magnetized.



For a demagnetization of the metal mold which became magnetized.