



# RELAYS & SOLENIIDS




**RH2B Series:** VerisofferstheidecRH2B Series, a DPDT blade-style socket relay for DIN rail mounting. All models are available in three coil voltage choices; 24VAC, 24VDC, or 120VAC, with contacts rated for 10A (resistive). RH2B-UL models have the added benefit of an on-board status LED to provide local indication, especially useful during commissioning and troubleshooting. When used with SH2B-05 socket, these relays mount to standard DIN rails. A spring-loaded removal clip is included with each socket.




PartNo.	ProductNo.	Manuf	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
19514	RH2B-U-AC120V	idec	8腳繼電器	110VAC/30VDC, 10A 220VDC/7.5A	RH2B-U	DPDT	AC120V	UL, CSA, TUV	35.6*21*27.5
16655	RH2B-U-DC24	idec	8腳繼電器	110VAC/30VDC, 10A 220VDC/7.5A	RH2B-U	DPDT	DC24V	UL, CSA, TUV	35.6*21*27.5
17549	RH2B-ULAC110	idec	功率型繼電器	110VAC/30VDC, 10A 220VDC/7.5A	RH2B-UL	DPDT	AC110V	UL, CSA, TUV	35.6*21*27.5
17552	RH2B-ULAC220	idec	功率型繼電器	110VAC/30VDC, 10A 220VDC/7.5A	RH2B-UL	DPDT	AC220V	UL, CSA, TUV	35.6*21*27.5
16817	RH2B-ULAC24	idec	8腳帶燈繼電器	240VAC/30VDC, 10A	RH2B-UL	DPDT	DC24V	UL, CSA, TUV	35.6*21*27.5
17546	RH2B-ULD12	idec	功率型繼電器	110VAC/30VDC, 10A 220VDC/7.5A	RH2B-UL	DPDT	DC12V	UL, CSA, TUV	35.6*21*27.5
17545	RH2B-ULDC24	idec	功率型繼電器	110VAC/30VDC, 10A 220VDC/7.5A	RH2B-UL	DPDT	DC24V	UL, CSA, TUV	35.6*21*27.5




Ferrite Beads are the most common EMI suppression products. Computer Products. (Music cards, Main Boards...etc.) Communication Products. Electronic automatic equipment...etc.

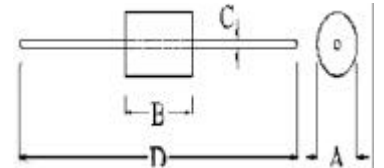

PartNo.	ProductNo.	Manuf	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
19473	RH4B-U-AC24V	idec	扁腳插座繼電器	110VAC/30VDC, 10A 220VAC, 7.5A	RH4B-U	4PDT	AC24V	UL, CSA, TUV	35.6*41*27
27767	RH4B-UL-DC24V	idec	扁腳插座繼電器	110VAC/30VDC, 10A 220VAC, 7.5A	RH4B-UL	4PDT	DC24V	UL, CSA, TUV	35.6*41*27



**Key features of the RY series include:**  
 Compact miniature size saves space  
 2PDT and 4PDT models, available with bifurcated crossbar contacts, ensure reliable low-current switching for dry circuit applications  
 Choice of plug-in/solder or PCB type terminals  
 Options include check button for test operation and indicator lights on 4PDT models  
 DIN rail, surface, panel, and PCB type sockets available for a wide range of mounting applications




PartNo.	ProductNo.	Manuf	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
17553	RY2S-U-DC12	idec	Power 繼電器	110VAC/30VDC, 3A 220VAC, 3A	RY2S-U	DPDT	DC12V	UL, CSA, TUV	35.6*14*27.5
17554	RY2S-U-DC24	idec	Power 繼電器	110VAC/30VDC, 3A 220VAC, 3A	RY2S-U	DPDT	DC24V	UL, CSA, TUV	35.6*14*27.5

## MK-系列8角和11角繼電器 OMRON-MK2P-18角圓形繼電器 OMRON-MK2P-18-Pin Plug Relays

詳細產品規格--請點擊 [www.100y.com.tw](http://www.100y.com.tw)



開閉容量10A(AC250V、DC28V)高容量。  
 標準品動作表示機構內藏。  
 標準品UL、CSA、SEV、DEMKO、NEMKO、SEMKO、VDE/IEC規格(TUV認定)取得

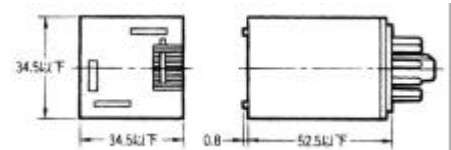


PartNo.	ProductNo.	Description	Coil rating	Contact rating	Contact form
4338	MK2P-I-110VAC	8角圓形繼電器	110Vac	250Vac, 28Vdc/10A	DPDT
4867	MK2P-I-220VAC	8角圓形繼電器	220Vac	250Vac, 28Vdc/10A	DPDT
4337	MK2P-I-24VDC	8角圓形繼電器	24Vdc	250Vac, 28Vdc/10A	DPDT

## OMRON-BMK3P-I11角圓形繼電器 OMRON-BMK3P-I11-Pin Plug Relays

詳細產品規格--請點擊 [www.100y.com.tw](http://www.100y.com.tw)



**Exceptionally Reliable General-purpose Relay Features**  
**Mechanical Indicator/ Push Button**  
 Breaks relatively large load currents despite small size.  
 Long life (minimum 100,000 electrical operations) assured by silver contacts.  
 Built-in operation indicator (Mechanical, LED), push button, diode surge suppression, varistor surge suppression.  
 Conforming to CENELEC standards.  
 Standard models are UL, CSA, SEV, DEMKO, NEMKO, SEMKO, TUV (IEC), and VDE.

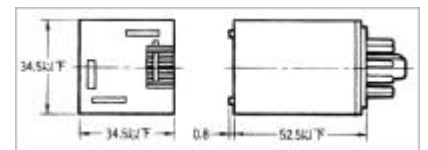

詳細產品規格--請點擊 [www.100y.com.tw](http://www.100y.com.tw)

