
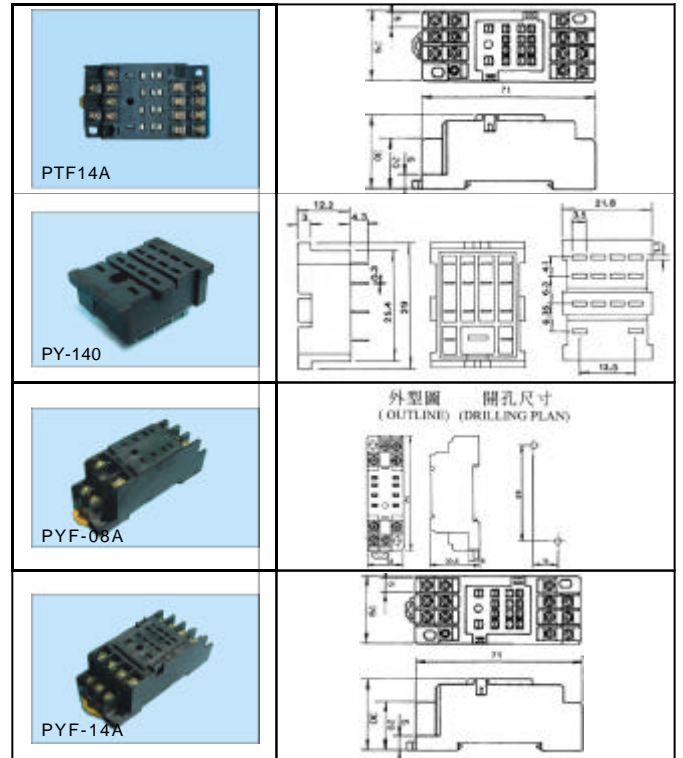


RELAYS & SOLENIIDS

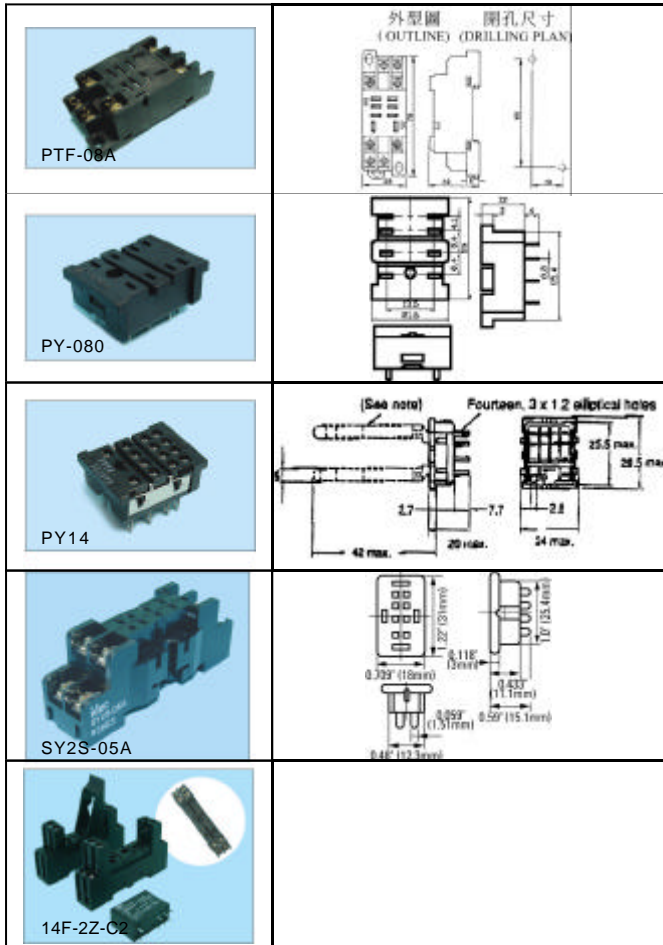

詳細產品規格--請點擊www.100y.com.tw

PartNo.	ProductNo.	Manuf.	Description	Pins	重量	L*W*H(mm)
27369	14F-2Z-C2		DIN 繼電器腳座	8 P		
2904	PTF-08A	OMRON	繼電器腳座 8 P	8 P	90g	78*32*28
11444	PTF14A		繼電器腳座/14P	14P		71*45*27
8446	PY-080		DIP繼電器腳座/8P	8 P	30g	29*22*12.2
10353	PY-140		DIP繼電器腳座/14P	14P	30g	29*21.8*12.2
11324	PY14	OMRON	繼電器腳座/14P	14P	10g	21*29*19
2555	PYF-08A	idec	方型繼電器腳座 8 P	8 P	50g	71*22*30.5
2027	PYF-14A		方型繼電器腳座14P	14P	80g	71*29*30.5
17555	SY2S-05A		DIN軌道安裝插座	8P-刀型		64*20*25

磁保持繼電器

Latching Relay



High switching capacity: 60A
 No power consumption when latching magnetic hold.
 No additional heating caused by driving coil.
 High resistance to vibration and shock.
 Maintenance of contact position when driving power in case of stop.

詳細產品規格--請點擊www.100y.com.tw

PartNo.	ProductNo.	Manuf.	Description	接點形態	Max. Set Volt.	Contact Rating A/V	Coil Volt.	Min. Reset Volt	LxWxH(mm)
16031	BT60L-12VDC-A	TOWARD	磁保持繼電器	1 Form A / 1 Make	60A/250V	9V	12VDC	4.8V	39*30.5*18

電磁閥

TTI Solenoids

詳細產品規格--請點擊www.100y.com.tw

