

# LM2937

## 500 mA Low Dropout Regulator

### General Description

The LM2937 is a positive voltage regulator capable of supplying up to 500 mA of load current. The use of a PNP power transistor provides a low dropout voltage characteristic. With a load current of 500 mA the minimum input to output voltage differential required for the output to remain in regulation is typically 0.5V (1V guaranteed maximum over the full operating temperature range). Special circuitry has been incorporated to minimize the quiescent current to typically only 10 mA with a full 500 mA load current when the input to output voltage differential is greater than 3V.

The LM2937 requires an output bypass capacitor for stability. As with most low dropout regulators, the ESR of this capacitor remains a critical design parameter, but the LM2937 includes special compensation circuitry that relaxes ESR requirements. The LM2937 is stable for all ESR below 3Ω. This allows the use of low ESR chip capacitors.

Ideally suited for automotive applications, the LM2937 will protect itself and any load circuitry from reverse battery con-

nections, two-battery jumps and up to +60V/-50V load dump transients. Familiar regulator features such as short circuit and thermal shutdown protection are also built in.


[Http://www.100y.com.tw](http://www.100y.com.tw)

### Features

- Fully specified for operation over -40°C to +125°C
- Output current in excess of 500 mA
- Output trimmed for 5% tolerance under all operating conditions
- Typical dropout voltage of 0.5V at full rated load current
- Wide output capacitor ESR range, up to 3Ω
- Internal short circuit and thermal overload protection
- Reverse battery protection
- 60V input transient protection
- Mirror image insertion protection

### Connection Diagram and Ordering Information

TO-220 Plastic Package




DS011280-2

Front View

Order Number LM2937ET-5.0, LM2937ET-8.0,  
LM2937ET-10, LM2937ET-12 or LM2937ET-15  
See NS Package Number T03B

SOT-223 Plastic Package




DS011280-26

Front View

Order Number LM2937IMP-5.0,  
LM2937IMP-8.0, LM2937IMP-10,  
LM2937IMP-12 or LM2937IMP-15  
See NS Package Number MP04A

TO-263 Surface-Mount Package



DS011280-5

Top View

Order Number LM2937ES-5.0, LM2937ES-8.0,  
LM2937ES-10, LM2937ES-12 or LM2937ES-15  
See NS Package Number TS3B



DS011280-6

Side View

## Connection Diagram and Ordering Information (Continued)

Temperature Range	Output Voltage					NSC Package Drawing	Package
	5.0	8.0	10	12	15		
-40°C ≤ T <sub>J</sub> ≤ 125°C	LM2937ES-5.0	LM2937ES-8.0	LM2937ES-10	LM2937ES-12	LM2937ES-15	TS3B	TO-263
	LM2937ET-5.0	LM2937ET-8.0	LM2937ET-10	LM2937ET-12	LM2937ET-15	T03B	TO-220
-40°C ≤ T <sub>J</sub> ≤ 85°C	LM2937IMP-5.0	LM2937IMP-8.0	LM2937IMP-10	LM2937IMP-12	LM2937IMP-15	MP04A	SOT-223
	LM2937IMPX-5.0	LM2937IMPX-8.0	LM2937IMPX-10	LM2937IMPX-12	LM2937IMPX-15	MP04A	SOT-223 in Tape and Reel
SOT-223 Package Markings	L71B	L72B	L73B	L74B	L75B		

The small physical size of the SOT-223 package does not allow sufficient space to provide the complete device part number. The actual devices will be labeled with the package markings shown.

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Input Voltage Continuous	26V
Transient ( $t \leq 100$ ms)	60V
Internal Power Dissipation (Note 2)	Internally Limited
Maximum Junction Temperature	150°C
Storage Temperature Range	-65°C to +150°C
TO-220 (10 seconds)	260°C

TO-263 (10 seconds)	230°C
SOT-223 (Vapor Phase, 60 seconds)	215°C
SOT-223 (Infrared, 15 seconds)	220°C
ESD Susceptibility (Note 3)	2 kV

## Operating Conditions (Note 1)

Temperature Range (Note 2)	-40°C ≤ $T_J$ ≤ 125°C
LM2937ET, LM2937ES	-40°C ≤ $T_J$ ≤ 85°C
LM2937IMP	26V

## Electrical Characteristics

$V_{IN} = V_{NOM} + 5V$ , (Note 4)  $I_{OUTmax} = 500$  mA for the TO-220 and TO-263 packages,  $I_{OUTmax}=400$ mA for the SOT-223 package,  $C_{OUT} = 10 \mu F$  unless otherwise indicated. **Boldface limits apply over the entire operating temperature range of the indicated device.**, all other specifications are for  $T_A = T_J = 25^\circ C$ .

Output Voltage ( $V_{OUT}$ )		5V		8V		10V		Units
Parameter	Conditions	Typ	Limit	Typ	Limit	Typ	Limit	
Output Voltage	$5 \text{ mA} \leq I_{OUT} \leq I_{OUTmax}$	5.00	4.85 <b>4.75</b> 5.15 <b>5.25</b>	8.00	7.76 <b>7.60</b> 8.24 <b>8.40</b>	10.00	9.70 <b>9.50</b> 10.30 <b>10.50</b>	V(Min) V(Min) V(Max) V(Max)
Line Regulation	$(V_{OUT} + 2V) \leq V_{IN} \leq 26V$ , $I_{OUT} = 5 \text{ mA}$	15	<b>50</b>	24	<b>80</b>	30	<b>100</b>	mV(Max)
Load Regulation	$5 \text{ mA} \leq I_{OUT} \leq I_{OUTmax}$	5	<b>50</b>	8	<b>80</b>	10	<b>100</b>	mV(Max)
Quiescent Current	$(V_{OUT} + 2V) \leq V_{IN} \leq 26V$ , $I_{OUT} = 5 \text{ mA}$	2	<b>10</b>	2	<b>10</b>	2	<b>10</b>	mA(Max)
	$V_{IN} = (V_{OUT} + 5V)$ , $I_{OUT} = I_{OUTmax}$	10	<b>20</b>	10	<b>20</b>	10	<b>20</b>	mA(Max)
Output Noise Voltage	10 Hz–100 kHz $I_{OUT} = 5 \text{ mA}$	150		240		300		$\mu\text{VRms}$
Long Term Stability	1000 Hrs.	20		32		40		mV
Dropout Voltage	$I_{OUT} = I_{OUTmax}$	0.5	<b>1.0</b>	0.5	<b>1.0</b>	0.5	<b>1.0</b>	V(Max)
	$I_{OUT} = 50 \text{ mA}$	110	<b>250</b>	110	<b>250</b>	110	<b>250</b>	mV(Max)
Short-Circuit Current		1.0	<b>0.6</b>	1.0	<b>0.6</b>	1.0	<b>0.6</b>	A(Min)
Peak Line Transient Voltage	$t_f < 100 \text{ ms}$ , $R_L = 100\Omega$	75	<b>60</b>	75	<b>60</b>	75	<b>60</b>	V(Min)
Maximum Operational Input Voltage			<b>26</b>		<b>26</b>		<b>26</b>	V(Min)
Reverse DC Input Voltage	$V_{OUT} \geq -0.6V$ , $R_L = 100\Omega$	-30	<b>-15</b>	-30	<b>-15</b>	-30	<b>-15</b>	V(Min)
Reverse Transient Input Voltage	$t_r < 1 \text{ ms}$ , $R_L = 100\Omega$	-75	<b>-50</b>	-75	<b>-50</b>	-75	<b>-50</b>	V(Min)

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Electrical Characteristics

$V_{IN} = V_{NOM} + 5V$ , (Note 4)  $I_{OUTmax} = 500$  mA for the TO-220 and TO-263 packages,  $I_{OUTmax}=400$ mA for the SOT-223 package,  $C_{OUT} = 10 \mu F$  unless otherwise indicated. **Boldface limits apply over the entire operating temperature range of the indicated device.**, all other specifications are for  $T_A = T_J = 25^\circ C$ .

Output Voltage ( $V_{OUT}$ )		12V		15V		Units
Parameter	Conditions	Typ	Limit	Typ	Limit	
Output Voltage	$5 \text{ mA} \leq I_{OUT} \leq I_{OUTmax}$	12.00	<b>11.40</b>	15.00	<b>14.55</b>	V (Min)
			12.36		15.45	V(Min)
			<b>12.60</b>		<b>15.75</b>	V(Max)
Line Regulation	$(V_{OUT} + 2V) \leq V_{IN} \leq 26V$ , $I_{OUT} = 5 \text{ mA}$	36	<b>120</b>	45	<b>150</b>	mV(Max)
Load Regulation	$5 \text{ mA} \leq I_{OUT} \leq I_{OUTmax}$	12	<b>120</b>	15	<b>150</b>	mV(Max)
Quiescent Current	$(V_{OUT} + 2V) \leq V_{IN} \leq 26V$ , $I_{OUT} = 5 \text{ mA}$	2	<b>10</b>	2	<b>10</b>	mA(Max)
	$V_{IN} = (V_{OUT} + 5V)$ , $I_{OUT} = I_{OUTmax}$	10	<b>20</b>	10	<b>20</b>	mA(Max)
Output Noise Voltage	$10 \text{ Hz} - 100 \text{ kHz}$ , $I_{OUT} = 5 \text{ mA}$	360		450		$\mu V_{rms}$
Long Term Stability	1000 Hrs.	44		56		mV
Dropout Voltage	$I_{OUT} = I_{OUTmax}$	0.5	<b>1.0</b>	0.5	<b>1.0</b>	V(Max)
	$I_{OUT} = 50 \text{ mA}$	110	<b>250</b>	110	<b>250</b>	mV(Max)
Short-Circuit Current			1.0	<b>0.6</b>	1.0	<b>0.6</b>
Peak Line Transient Voltage	$t_f < 100 \text{ ms}$ , $R_L = 100\Omega$	75	<b>60</b>	75	<b>60</b>	V(Min)
Maximum Operational Input Voltage				<b>26</b>		V(Min)
Reverse DC Input Voltage	$V_{OUT} \geq -0.6V$ , $R_L = 100\Omega$	-30	<b>-15</b>	-30	<b>-15</b>	V(Min)
Reverse Transient Input Voltage	$t_f < 1 \text{ ms}$ , $R_L = 100\Omega$	-75	<b>-50</b>	-75	<b>-50</b>	V(Min)

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Electrical specifications do not apply when operating the device outside of its rated Operating Conditions.

**Note 2:** The maximum allowable power dissipation at any ambient temperature is  $P_{MAX} = (125 - T_A)/\theta_{JA}$ , where 125 is the maximum junction temperature for operation,  $T_A$  is the ambient temperature, and  $\theta_{JA}$  is the junction-to-ambient thermal resistance. If this dissipation is exceeded, the die temperature will rise above  $125^\circ C$  and the electrical specifications do not apply. If the die temperature rises above  $150^\circ C$ , the LM2937 will go into thermal shutdown. For the LM2937, the junction-to-ambient thermal resistance  $\theta_{JA}$  is  $65^\circ C/W$ , for the TO-220 package,  $73^\circ C/W$  for the TO-263 package, and  $174^\circ C/W$  for the SOT-223 package. When used with a heatsink,  $\theta_{JA}$  is the sum of the LM2937 junction-to-case thermal resistance  $\theta_{JC}$  of  $3^\circ C/W$  and the heatsink case-to-ambient thermal resistance. If the TO-263 or SOT-223 packages are used, the thermal resistance can be reduced by increasing the P.C. board copper area thermally connected to the package (see Application Hints for more information on heatsinking).


**Note 3:** ESD rating is based on the human body model, 100 pF discharged through 1.5 k $\Omega$ .

**Note 4:** Typicals are at  $T_J = 25^\circ C$  and represent the most likely parametric norm.


勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Typical Performance Characteristics


**Dropout Voltage vs Output Current**




**Dropout Voltage vs Temperature**




**Output Voltage vs Temperature**




**Quiescent Current vs Temperature**




**Quiescent Current vs Input Voltage**




**Quiescent Current vs Output Current**




**Line Transient Response**

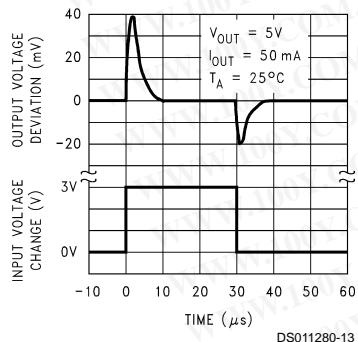


**Load Transient Response**

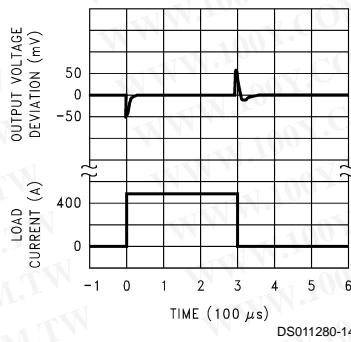


**Ripple Rejection**

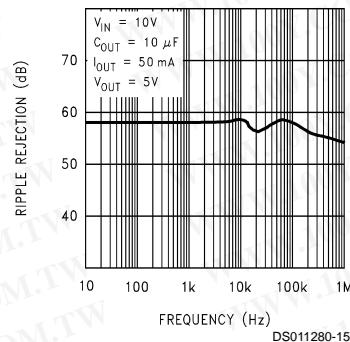


**Output Impedance**



**Maximum Power Dissipation (TO-220)**



**Maximum Power Dissipation (TO-263) (Note 2)**




勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787


[Http://www.100y.com.tw](http://www.100y.com.tw)

## Typical Performance Characteristics (Continued)


### Low Voltage Behavior




### Low Voltage Behavior




### Low Voltage Behavior




### Output at Voltage Extremes




### Output at Voltage Extremes



### Output Capacitor ESR

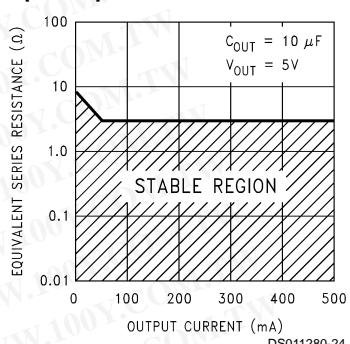


### Peak Output Current



勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Typical Application

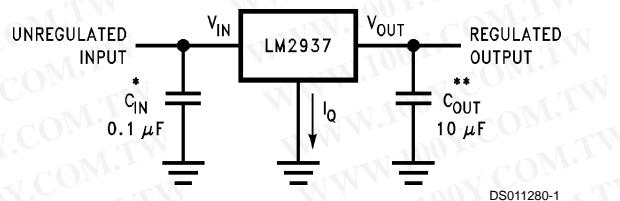

\* Required if the regulator is located more than 3 inches from the power supply filter capacitors.

\*\* Required for stability.  $C_{out}$  must be at least 10  $\mu\text{F}$  (over the full expected operating temperature range) and located as close as possible to the regulator. The equivalent series resistance, ESR, of this capacitor may be as high as 3  $\Omega$ .

## Application Hints

### EXTERNAL CAPACITORS

The output capacitor is critical to maintaining regulator stability, and must meet the required conditions for both ESR (Equivalent Series Resistance) and minimum amount of capacitance.

#### MINIMUM CAPACITANCE:

The minimum output capacitance required to maintain stability is  $10 \mu\text{F}$  (this value may be increased without limit). Larger values of output capacitance will give improved transient response.

#### ESR LIMITS:

The ESR of the output capacitor will cause loop instability if it is too high or too low. The acceptable range of ESR plotted versus load current is shown in the graph below. ***It is essential that the output capacitor meet these requirements, or oscillations can result.***

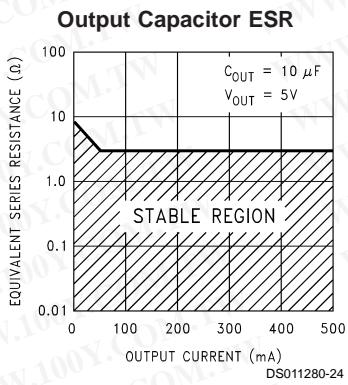


FIGURE 1. ESR Limits

It is important to note that for most capacitors, ESR is specified only at room temperature. However, the designer must ensure that the ESR will stay inside the limits shown over the entire operating temperature range for the design.

For aluminum electrolytic capacitors, ESR will increase by about 30X as the temperature is reduced from  $25^\circ\text{C}$  to  $-40^\circ\text{C}$ . This type of capacitor is not well-suited for low temperature operation.

Solid tantalum capacitors have a more stable ESR over temperature, but are more expensive than aluminum electrolytics. A cost-effective approach sometimes used is to parallel an aluminum electrolytic with a solid Tantalum, with the total capacitance split about 75/25% with the Aluminum being the larger value.


If two capacitors are paralleled, the effective ESR is the parallel of the two individual values. The "flatter" ESR of the Tantalum will keep the effective ESR from rising as quickly at low temperatures.

### HEATSINKING

A heatsink may be required depending on the maximum power dissipation and maximum ambient temperature of the application. Under all possible operating conditions, the junction temperature must be within the range specified under Absolute Maximum Ratings.

To determine if a heatsink is required, the power dissipated by the regulator,  $P_D$ , must be calculated.

The figure below shows the voltages and currents which are present in the circuit, as well as the formula for calculating the power dissipated in the regulator:

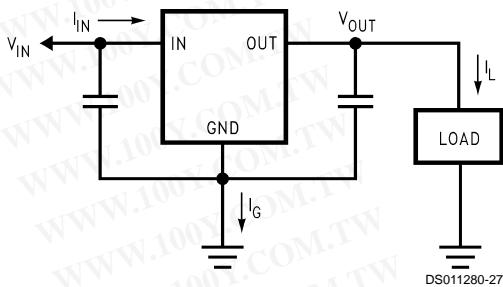

$$I_{IN} = I_L + I_G$$

$$P_D = (V_{IN} - V_{OUT}) I_L + (V_{IN}) I_G$$

FIGURE 2. Power Dissipation Diagram

The next parameter which must be calculated is the maximum allowable temperature rise,  $T_R$  (max). This is calculated by using the formula:

$$T_R \text{ (max)} = T_J \text{ (max)} - T_A \text{ (max)}$$

where:  $T_J$  (max) is the maximum allowable junction temperature, which is  $125^\circ\text{C}$  for commercial grade parts.

$T_A$  (max) is the maximum ambient temperature which will be encountered in the application.

Using the calculated values for  $T_R$ (max) and  $P_D$ , the maximum allowable value for the junction-to-ambient thermal resistance,  $\theta_{(J-A)}$ , can now be found:

$$\theta_{(J-A)} = T_R \text{ (max)} / P_D$$

**IMPORTANT:** If the maximum allowable value for  $\theta_{(J-A)}$  is found to be  $\geq 53^\circ\text{C/W}$  for the TO-220 package,  $\geq 80^\circ\text{C/W}$  for the TO-263 package, or  $\geq 174^\circ\text{C/W}$  for the SOT-223 package, no heatsink is needed since the package alone will dissipate enough heat to satisfy these requirements.

If the calculated value for  $\theta_{(J-A)}$  falls below these limits, a heatsink is required.

### HEATSINKING TO-220 PACKAGE PARTS

The TO-220 can be attached to a typical heatsink, or secured to a copper plane on a PC board. If a copper plane is to be used, the values of  $\theta_{(J-A)}$  will be the same as shown in the next section for the TO-263.

If a manufactured heatsink is to be selected, the value of heatsink-to-ambient thermal resistance,  $\theta_{(H-A)}$ , must first be calculated:

$$\theta_{(H-A)} = \theta_{(J-A)} - \theta_{(C-H)} - \theta_{(J-C)}$$

Where:  $\theta_{(J-C)}$  is defined as the thermal resistance from the junction to the surface of the case. A value of  $3^\circ\text{C/W}$  can be assumed for  $\theta_{(J-C)}$  for this calculation.

$\theta_{(C-H)}$  is defined as the thermal resistance between the case and the surface of the heatsink. The value of  $\theta_{(C-H)}$  will vary from about  $1.5^\circ\text{C/W}$  to about  $2.5^\circ\text{C/W}$  (depending on method of attachment, insulator, etc.). If the exact value is unknown,  $2^\circ\text{C/W}$  should be assumed for  $\theta_{(C-H)}$ .

When a value for  $\theta_{(H-A)}$  is found using the equation shown, a heatsink must be selected that has a value that is less than or equal to this number.

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Application Hints (Continued)

$\theta_{(H-A)}$  is specified numerically by the heatsink manufacturer in the catalog, or shown in a curve that plots temperature rise vs power dissipation for the heatsink.

### HEATSINKING TO-263 AND SOT-223 PACKAGE PARTS

Both the TO-263 ("S") and SOT-223 ("MP") packages use a copper plane on the PCB and the PCB itself as a heatsink. To optimize the heat sinking ability of the plane and PCB, solder the tab of the package to the plane.

Figure 3 shows for the TO-263 the measured values of  $\theta_{(J-A)}$  for different copper area sizes using a typical PCB with 1 ounce copper *and no solder mask over the copper area used for heatsinking*.

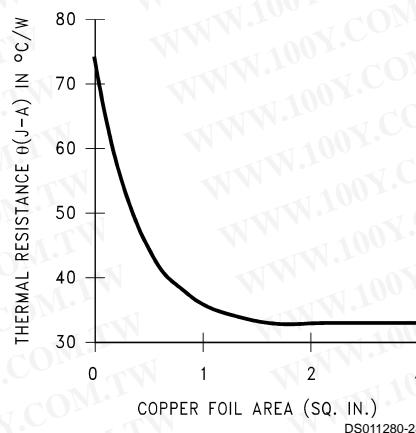


FIGURE 3.  $\theta_{(J-A)}$  vs Copper (1 ounce) Area for the TO-263 Package

As shown in the figure, increasing the copper area beyond 1 square inch produces very little improvement. It should also be observed that the minimum value of  $\theta_{(J-A)}$  for the TO-263 package mounted to a PCB is 32°C/W.

As a design aid, Figure 4 shows the maximum allowable power dissipation compared to ambient temperature for the TO-263 device (assuming  $\theta_{(J-A)}$  is 35°C/W and the maximum junction temperature is 125°C).

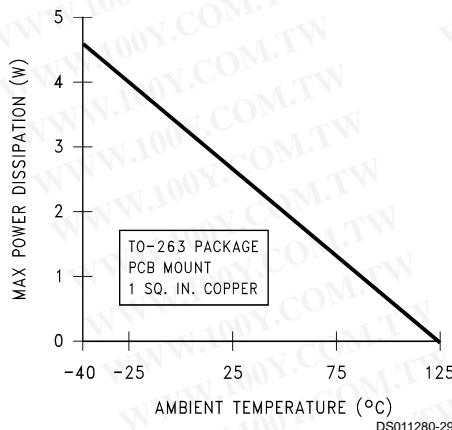


FIGURE 4. Maximum Power Dissipation vs  $T_{AMB}$  for the TO-263 Package

Figure 5 and Figure 6 show the information for the SOT-223 package. Figure 6 assumes a  $\theta_{(J-A)}$  of 74°C/W for 1 ounce copper and 51°C/W for 2 ounce copper and a maximum junction temperature of 125°C.

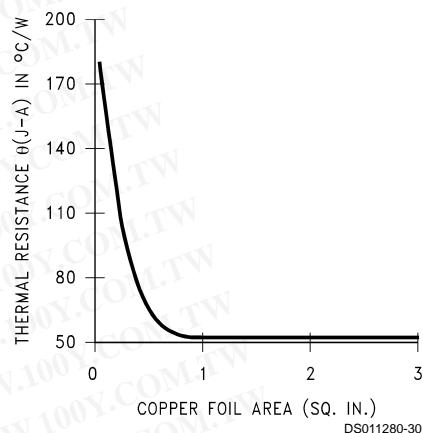


FIGURE 5.  $\theta_{(J-A)}$  vs Copper (2 ounce) Area for the SOT-223 Package

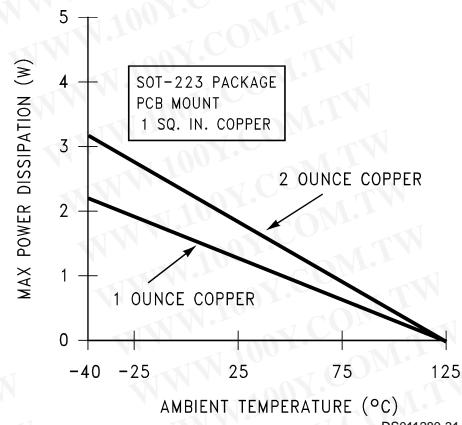


FIGURE 6. Maximum Power Dissipation vs  $T_{AMB}$  for the SOT-223 Package

### SOT-223 SOLDERING RECOMMENDATIONS


It is not recommended to use hand soldering or wave soldering to attach the small SOT-223 package to a printed circuit board. The excessive temperatures involved may cause package cracking.

Either vapor phase or infrared reflow techniques are preferred soldering attachment methods for the SOT-223 package.

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Physical Dimensions

inches (millimeters) unless otherwise noted

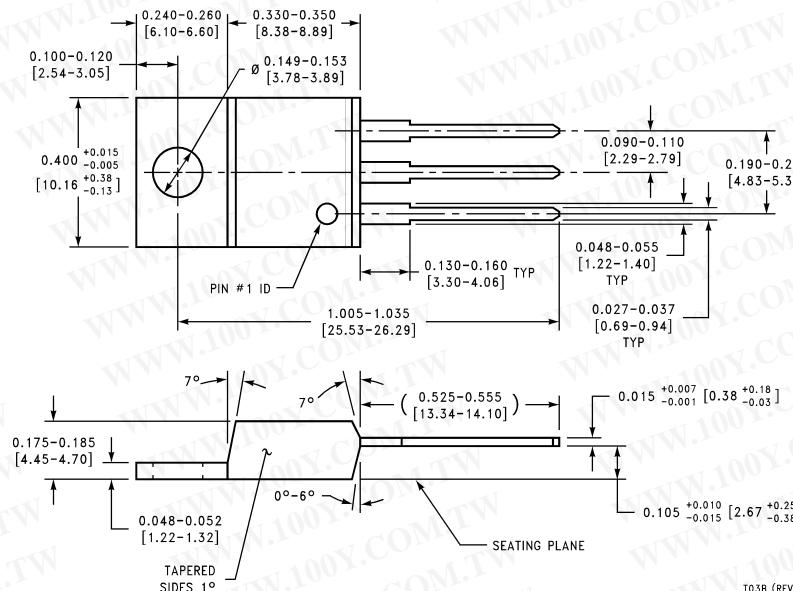


### Plastic Package

Order Number LM2937ET-5.0,  
LM2937ET-8.0, LM2937ET-10, LM2937ET-12,  
or LM2937ET-15  
NS Package Number T03B

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

## **Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

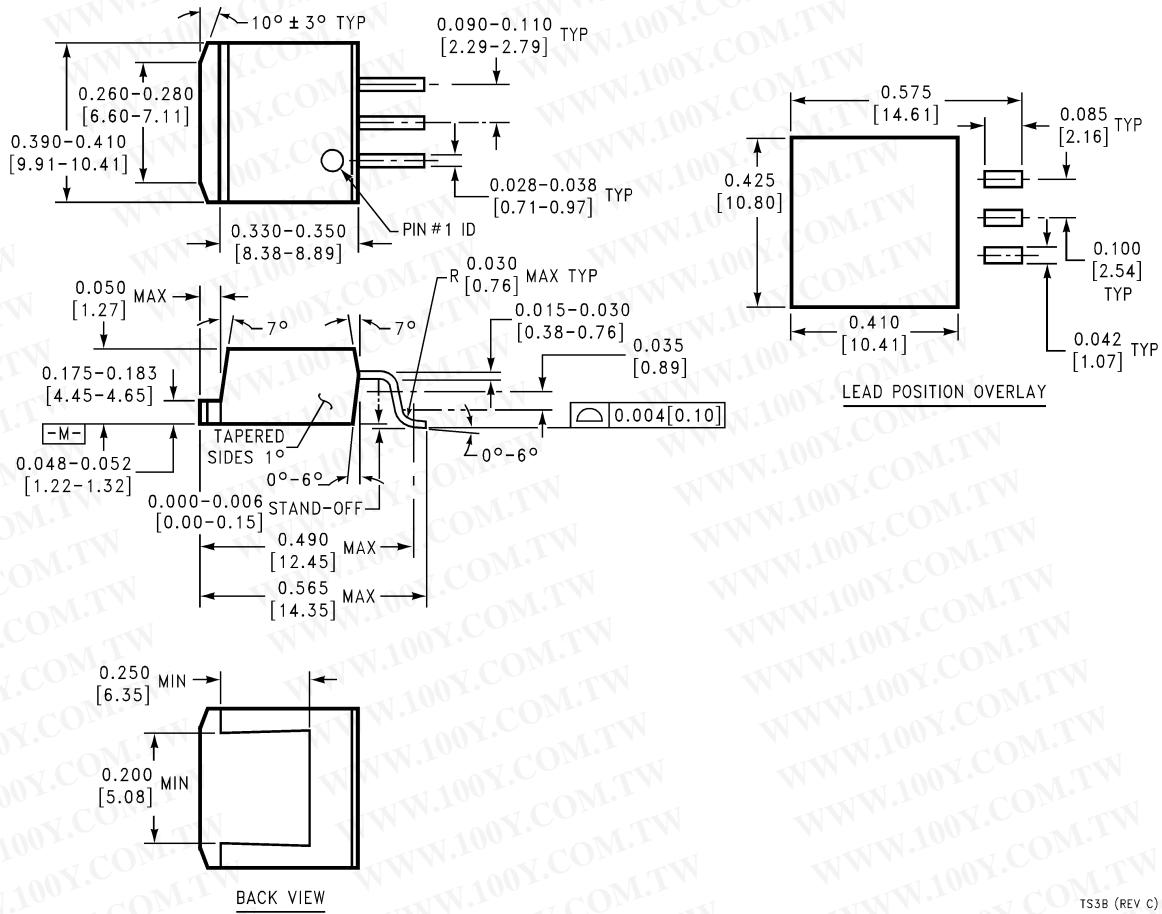


TS3B (REV C)

**TO-263 3-Lead Plastic Surface Mount Package**  
**Order Number LM2937ES-5.0, LM2937ES-8.0, LM2937ES-10, LM2937ES-12 or LM2937ES-15**  
**NS Package Number TS3B**

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

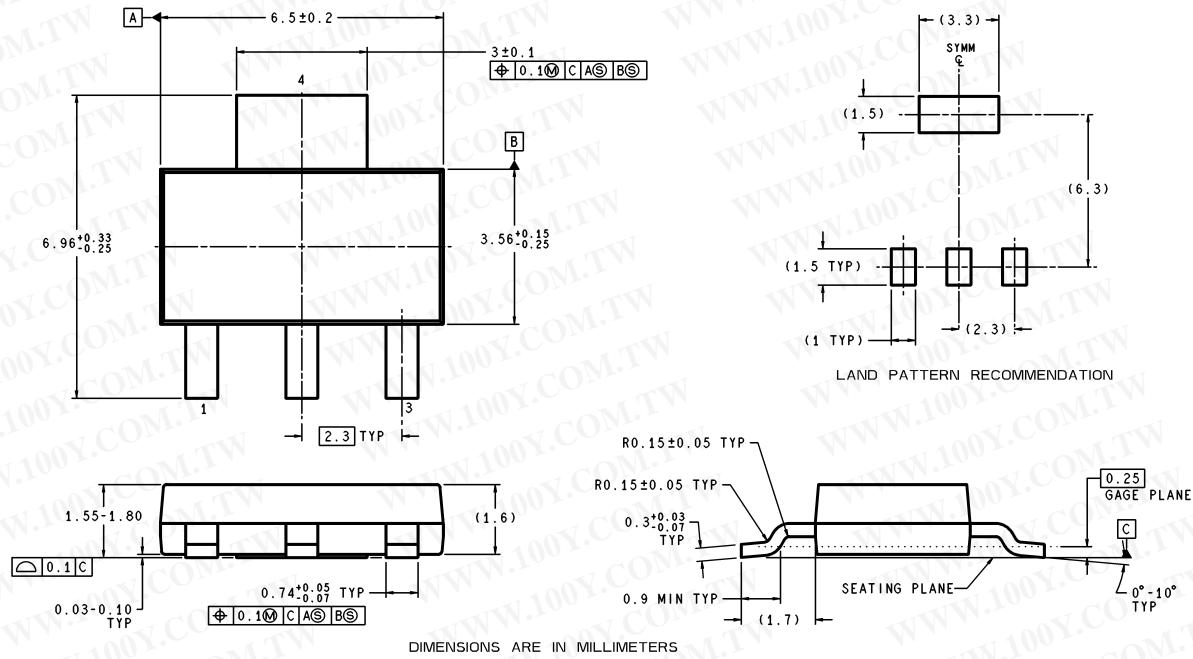

MP04A (Rev A)

**SOT-223 3-Lead Plastic Surface Mount Package**  
**Order Number LM2937IMP-5.0, LM2937IMP-8.0, LM2937IMP-10, LM2937IMP-12 or LM2937IMP-15**  
**NS Package Number MP04A**

勝特力材料 886-3-5753170  
 勝特力電子(上海) 86-21-54151736  
 勝特力電子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**National Semiconductor Corporation**  
 Americas  
 Tel: 1-800-272-9959  
 Fax: 1-800-737-7018  
 Email: support@nsc.com  
[www.national.com](http://www.national.com)

**National Semiconductor Europe**  
 Fax: +49 (0) 180-530 85 86  
 Email: europe.support@nsc.com  
 Deutsch Tel: +49 (0) 69 9508 6208  
 English Tel: +44 (0) 870 24 0 2171  
 Français Tel: +33 (0) 1 41 91 8790

**National Semiconductor Asia Pacific Customer Response Group**  
 Tel: 65-2544466  
 Fax: 65-2504466  
 Email: ap.support@nsc.com

**National Semiconductor Japan Ltd.**  
 Tel: 81-3-5639-7560  
 Fax: 81-3-5639-7507