


# Panasonic

ideas for life

**POLARISED, MONOSTABLE SAFETY RELAY with (mechanical linked) forced contacts operation**

## SF RELAYS



**RoHS Directive compatibility information**  
<http://www.nais-e.com/>

### FEATURES

- **Forced operation contacts (3 Form A 1 Form B)**  
 N.O. and N.C. side contacts are connected through a card so that one interacts with the other in movement. In case of a contact welding, the other keeps a min. 0.5mm .020inch contact gap.

- **Separated chamber structure (3 Form A 1 Form B)**  
 N.O. and N.C. side contacts are put in each own space surrounded with a card and a body-separator. That prevents short circuit between contacts, which is caused by their springs welding or damaged.
- **UL/CSA, TÜV, SEV approved**

### SPECIFICATIONS

#### Contact

Type	SF3	
Arrangement	3 Form A 1 Form B	
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)	30 mΩ	
Contact material	Au-flashed AgSnO <sub>2</sub> type	
Rating (resistive)	Nominal switching capacity	6 A 250 V AC, 6 A 30 V DC
	Max. switching power	1,500 VA, 180 W
	Max. switching voltage	30 V DC, 440 V AC
	Max. carrying current	6 A DC, AC
	Min. switching capacity (Reference value) <sup>#1</sup>	100 mA, 5 V DC
Expected life (min. operations)	Mechanical (at 180 cpm) (resistive)	10 <sup>7</sup>
	Electrical (at 20 cpm)	3×10 <sup>4</sup> *

#### Coil (at 25°C 77°F)

Nominal operating power	500 mW
-------------------------	--------

<sup>#1</sup> This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

#### Remarks

- \* Specifications will vary with foreign standards certification ratings.
- <sup>#1</sup> More than 10<sup>5</sup> operations when applying the nominal switching capacity to one side of contact pairs of each Form A contact and Form B contact
- <sup>#2</sup> Measurement at same location as "Initial breakdown voltage" section
- <sup>#3</sup> Detection current: 10mA
- <sup>#4</sup> Excluding contact bounce time
- <sup>#5</sup> Half-wave pulse of sine wave: 11ms; detection time: 10μs
- <sup>#6</sup> Half-wave pulse of sine wave: 6ms
- <sup>#7</sup> Detection time: 10μs
- <sup>#8</sup> Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT

#### Characteristics (at 20°C 68°F, 50% Relative humidity)

		SF3
Max. operating speed		180 cpm (at nominal voltage)
Initial insulation resistance <sup>#2</sup>		Min. 1,000 MΩ at 500 V DC
Initial breakdown voltage <sup>#3</sup>	Between contact sets	2,500 Vrms
	Between open contacts	2,500 Vrms
	Between contact and coil	2,500 Vrms
Operate time <sup>#4</sup> (at nominal voltage)		Max. 30 ms
Release time (without diode) <sup>#4</sup> (at nominal voltage)		Max. 15 ms
Temperature rise (at nominal voltage)		Max. 45°C with nominal coil voltage and at 6 A switching current
Shock resistance	Functional <sup>#5</sup>	Min. 294 m/s <sup>2</sup> {30 G}
	Destructive <sup>#5</sup>	Min. 980 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional <sup>#7</sup>	117.6 m/s <sup>2</sup> {12 G}, 10 to 55 Hz at double amplitude of 2 mm
	Destructive	117.6 m/s <sup>2</sup> {12 G}, 10 to 55 Hz at double amplitude of 2 mm
Conditions for operation, transport and storage <sup>#8</sup> (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +70°C -40°F to +158°F
	Humidity	5 to 85% R.H.
Unit weight		37 g 1.31 oz

### ORDERING INFORMATION

Ex. SF **3** ——— DC 12 V

Contact arrangement	Coil voltage
3: 3 Form A 1 Form B	DC 5, 9, 12, 18, 21, 24, 36, 48, 60 V

### TYPICAL APPLICATIONS

- Signal
- Escalator
- Elevator
- Medical Instruments
- Factory Automation


勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# SF

## TYPES AND COIL DATA (at 20°C 68°F)

Contact arrangement	Part No.	Nominal voltage, V DC	Pick-up voltage, VDC (max.)	Drop-out voltage, V DC (min.)	Coil resistance $\Omega$ ( $\pm 10\%$ )	Nominal operating current, mA ( $\pm 10\%$ )	Nominal operating power, mW	Max. allowable voltage, V DC
SF3	SF3-DC5V	5	3.75	0.5	50	100	500	6
	SF3-DC9V	9	6.75	0.9	162	55.6	500	10.8
	SF3-DC12V	12	9	1.2	288	41.7	500	14.4
	SF3-DC18V	18	13.5	1.8	648	27.8	500	21.6
	SF3-DC21V	21	15.75	2.1	882	23.8	500	25.2
	SF3-DC24V	24	14.4	2.4	1,152	20.8	500	28.8
	SF3-DC36V	36	27	3.6	2,592	13.9	500	43.2
	SF3-DC48V	48	36	4.8	4,608	10.4	500	57.6
SF3-DC60V	60	45	6.0	7,200	8.3	500	72	


## DIMENSIONS

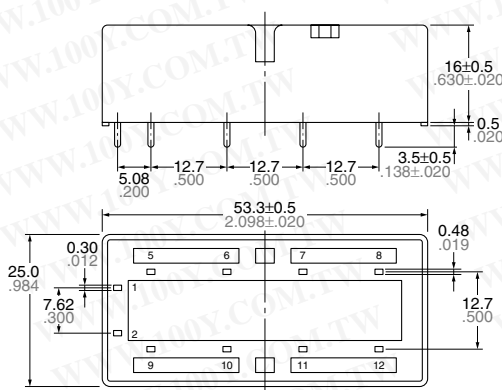


General tolerance:  $\pm 0.3 \pm 0.012$

mm inch

Schematic (Bottom view)




PC board pattern (Bottom view)

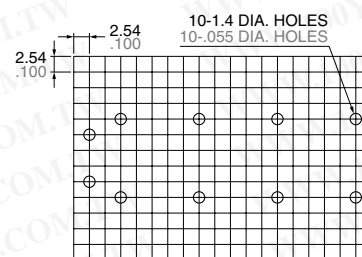

Tolerance:  $\pm 0.1 \pm 0.004$


## REFERENCE DATA

### 1. Operate/release time

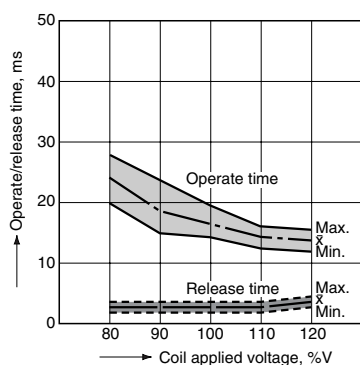

### 2. Coil temperature rise

Coil applied voltage: 120%V  
Contact switching current: 6A

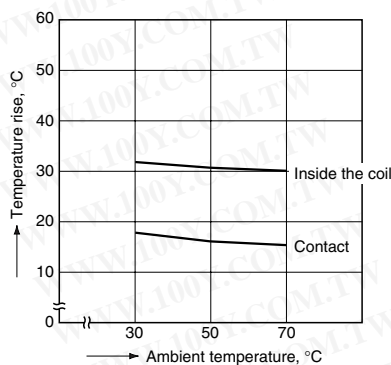

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# SAFETY STRUCTURE OF SF RELAYS

This SF relay design ensures that subsequent operations shut down and can automatically return to a safe state when the SF relay suffers overloading and other circuit abnormalities

(unforeseen externally caused circuit or device breakdowns, end of life incidents, and noise, surge, and environmental influences) owing to contact welding, spring fusion or, in the worst-case

scenario, relay breakdown (coil rupture, faulty operation, faulty return, and fatigue and breakage of the operating spring and return spring), and even in the event of end of life.

	Structure	Operation
1. Forced operation method (3a1b types)	<p>The two contacts "a" and "b" are coupled with the same card. The operation of each contact is regulated by the movement of the other contact.</p>	<p>Even when one contact is welded closed, the other maintains a gap of greater than 0.5 mm .020 inch.</p> <p>In the diagram on the left, the lower contact "b" have welded but the upper contact "a" maintain a gap of greater than 0.5 mm .020 inch.</p> <p>Subsequent contact movement is suspended and the weld can be detected</p>
2. Separate chamber method (3a1b types)	<p>In independent chambers, the contacts "a" and "b" are kept apart by a body/card separator or by the card itself.</p>	<p>Prevents shorting and fusing of springs and spring failure owing to short-circuit current.</p> <p>As shown on the diagram on the left, even if the operating springs numbered 1 and 2 there is no shorting between "a" and "b" contacts.</p>
3. 3a1b contact	<p>Structure with independent COM contact of (3a1b), contacts.</p>	<p>Independent COM enables differing pole circuit configurations. This makes it possible to design various kinds of control circuits and safety circuits.</p>



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## THE OPERATION OF SF RELAYS (when contacts are welded)

SF relays work to maintain a normal operating state even when overloading or short-circuit currents occur. It is also easy to include weld detection and safety circuits in the design to ensure safety even if contacts weld.

### Form "b" Contact Weld



If the form "b" contact (No. 3) welds, the armature becomes non-operational, the contact gaps at the three form "a" contacts are maintained at greater than 0.5 mm .020 inch. Reliable isolation is thus ensured

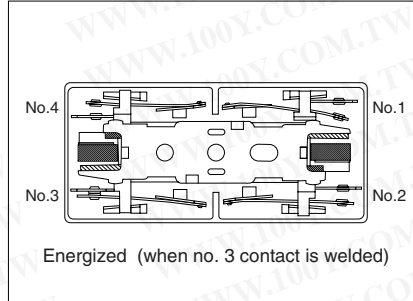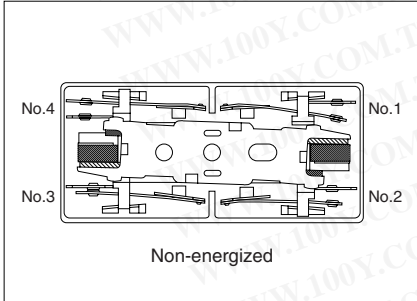

If the No. 3 contact welds.  
Each of the three form "a" contacts (No. 1, 2, and 4) maintain a gap of greater than 0.5 mm .020 inch.

### Form "a" Contact Weld


When the form "a" contacts (No. 1, 2, or 4) weld, the armature remains in a non-returned state and the contact gap at the single form "b" contact is maintained at greater than 0.5 mm .020 inch. Reliable isolation is thus ensured.

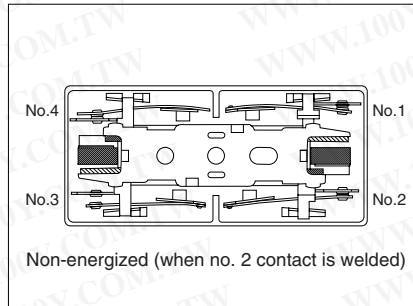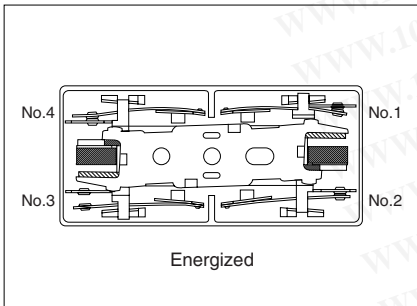

If the No. 2 contact welds.  
The single form "b" contact (No. 3) maintains a gap of greater than 0.5 mm .020 inch.

### Contact Operation Table

The table below shows the state of the other contacts when the current through the welded form "a" contact is 0 V and the rated voltage is applied through the form "b" contact.

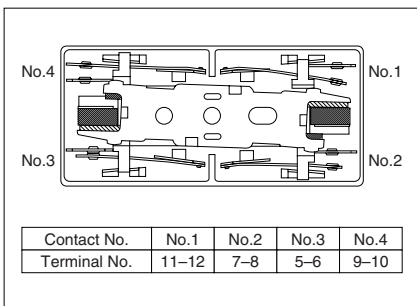

Contact No.		State of other contacts			
		1	2	3	4
Welded terminal No.	1			>0.5	
	2			>0.5	
	3	>0.5	>0.5		>0.5
	4			>0.5	

>0.5: contact gap is kept at min. 0.5 mm .020 inch  
Empty cells: either closed or open

Note: Contact gaps are shown at the initial state.  
If the contacts change state owing to loading/breaking it is necessary to check the actual loading.

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**For Cautions for Use, see Relay Technical Information .**