

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

## Screw fuse base

### Applications:

Supporters for D01-D03, D II -D III fuses of all application kinds (gG, aM, aR) in electric lines (type gG) capable of working under the heat caused by rated current and perspective short-circuit impacting current up to 50KA.

Rated insulate voltage up to 1140V

Working frequency 50Hz AC

Rated current 200A

Compliant to GB13539.1, GB13539.3, GB13539.5 and IEC269-1, IEC269-3

### Design Features:

This series of fuse bases are made up with fuse carrier and its supporter. Insert the fuse into the carrier, which will be screwed into the supporter to form a complete screw fuse unit. There is a transparent glass window at the top of the fuse carrier, through which the status of the fuse can be easily observed. It can be screw installed or rail installed.



### Basic Data:

It can be screw installed or rail installed. (Figures 10.1--10.8)


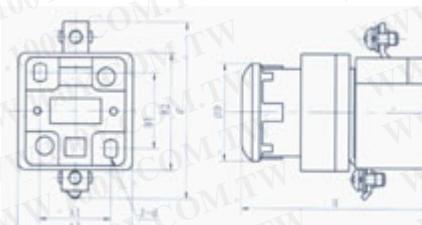


Figure 10.1 FB21~22 FB24

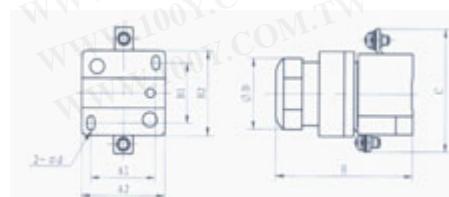

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

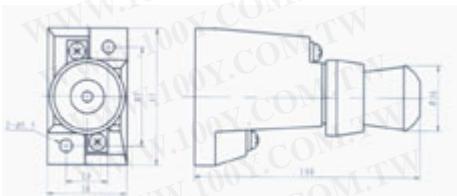
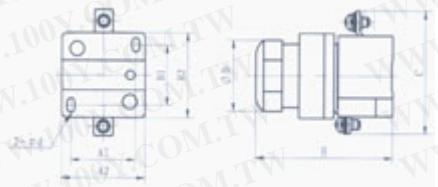


Figure 10.3 RL5

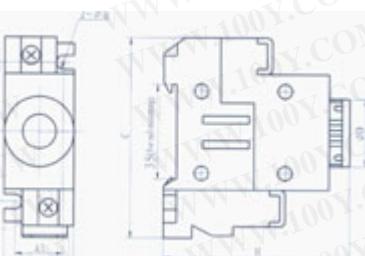


Figure 10.4 FB26-16 FB26-63(RL8B RL8B-63)

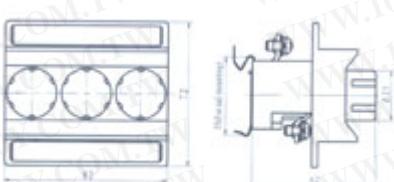
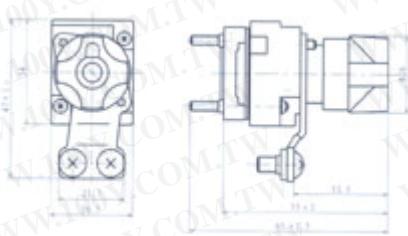


Figure 10.5 FB26-16-3P FB26-63-3P

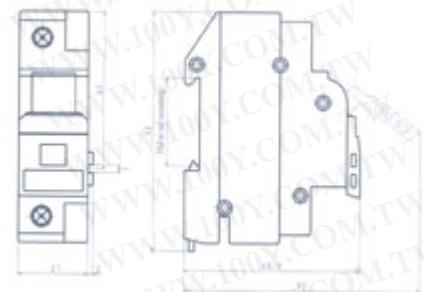


Figure 10.6 FB21-3P(RO21-3P)  
FB22-3P(RO22-3P)

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



**Figure 10.7 FB26A-63**



**Figure 10.8 FB26B-63**

<b>1012</b>	<b>RL1-15</b>	<b>RL1-15</b>	--	<b>380</b>	<b>15</b>	<b>10.2</b>	<b>24</b>	<b>39</b>	<b>28</b>	<b>41</b>	<b>64</b>	<b>58</b>	<b>33</b>	<b>5</b>	<b>116</b>
<b>1013</b>	<b>RL1-60</b>	<b>RL1-60</b>	--	<b>380</b>	<b>60</b>	<b>10.2</b>	<b>34</b>	<b>56</b>	<b>40</b>	<b>56</b>	<b>78</b>	<b>74</b>	<b>48</b>	<b>6</b>	<b>243</b>
<b>1014</b>	<b>RL1-100</b>	<b>RL1-100</b>	--	<b>380</b>	<b>100</b>	<b>10.2</b>	<b>56</b>	<b>83</b>	<b>53</b>	<b>83</b>	<b>124</b>	<b>102</b>	<b>70</b>	<b>8</b>	<b>798</b>
<b>1015</b>	<b>RL1-200</b>	<b>RL1-200</b>	--	<b>380</b>	<b>200</b>	<b>10.2</b>	<b>63</b>	<b>89</b>	<b>64</b>	<b>89</b>	<b>154</b>	<b>108</b>	<b>81</b>	<b>10</b>	<b>1455</b>
<b>1016</b>	<b>RL5</b>	<b>RL5</b>	--	<b>1140</b>	<b>25</b>	<b>10.3</b>	<b>See Figure10.3</b>								<b>260</b>

**勝特力材料 886-3-5753170**  
**胜特力电子(上海) 86-21-54151736**  
**胜特力电子(深圳) 86-755-83298787**  
**[Http://www.100y.com.tw](http://www.100y.com.tw)**