

## Power Type Wire Wound Resistors Non Flammable Wire Wound Resistor

### 電力型 Power Type

#### R type :

固定電阻

Fixed Resistor

#### SR type :


可調電阻

Adjustable Resistor

#### NR type :

無感電阻

Noninductive Resistor

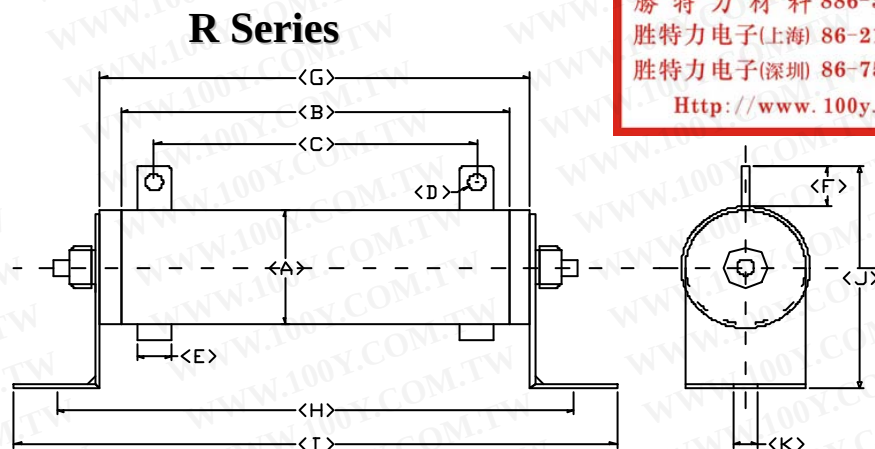

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### SPEC.

| 定格電力(W)<br>Power Rating | 尺寸 Dimensions (mm) |      |      |       |       |     |     |       |     |     |     | 電阻值範圍            |
|-------------------------|--------------------|------|------|-------|-------|-----|-----|-------|-----|-----|-----|------------------|
|                         | A±1                | B±2  | C±2  | D±0.1 | E±0.2 | F±1 | G±2 | H±0.2 | I±2 | J±2 | K±1 | Resistance Range |
| R- 10W                  | 12.5               | 45   | 35   | 2.1   | 4     | 10  | 47  | 59    | 76  | 30  | 4   | 1Ω ~ 10KΩ        |
| R- 20W                  | 4                  | 16.5 | 60   | 45    | 3     | 5   | 12  | 63    | 70  | 87  | 4   | 1Ω ~ 20KΩ        |
| R- 30W                  | 41                 | 4    | 16.5 | 80    | 65    | 3   | 5   | 12    | 82  | 104 | 4   | 1Ω ~ 30KΩ        |
| R- 40W                  | 120                | 41   | 4    | 16.5  | 110   | 95  | 3   | 5     | 12  | 112 | 4   | 1Ω ~ 40KΩ        |
| R- 50W                  | 134                | 150  | 41   | 4     | 25    | 110 | 92  | 5.2   | 8   | 19  | 6   | 0.1Ω ~ 50KΩ      |
| R- 60W                  | 120                | 142  | 164  | 58    | 6     | 28  | 90  | 74    | 5.2 | 8   | 6   | 0.1Ω ~ 60KΩ      |
| R- 80W                  | 17                 | 101  | 123  | 145   | 60    | 6   | 28  | 110   | 94  | 5.2 | 6   | 0.1Ω ~ 80KΩ      |
| R- 100W                 | 8                  | 17   | 121  | 143   | 165   | 60  | 6   | 28    | 140 | 124 | 6   | 0.1Ω ~ 100KΩ     |
| R- 120W                 | 5.2                | 8    | 17   | 151   | 173   | 195 | 60  | 6     | 28  | 160 | 6   | 0.1Ω ~ 120KΩ     |
| R- 150W                 | 144                | 5.2  | 8    | 17    | 171   | 193 | 215 | 60    | 6   | 28  | 6   | 0.1Ω ~ 150KΩ     |
| R- 160W                 | 195                | 179  | 5.2  | 8     | 17    | 206 | 229 | 250   | 60  | 6   | 8   | 0.1Ω ~ 160KΩ     |
| R- 200W                 | 35                 | 185  | 167  | 5.2   | 8     | 18  | 197 | 217   | 245 | 75  | 8   | 0.1Ω ~ 200KΩ     |
| R- 250W                 | 8                  | 35   | 210  | 192   | 5.2   | 8   | 18  | 222   | 242 | 270 | 8   | 0.5Ω ~ 250KΩ     |
| R- 300W                 | 75                 | 8    | 40   | 210   | 180   | 5.2 | 10  | 19    | 222 | 242 | 8   | 0.5Ω ~ 300KΩ     |
| R- 400W                 | 270                | 77   | 8    | 40    | 260   | 230 | 5.2 | 10    | 19  | 272 | 8   | 0.5Ω ~ 400KΩ     |
| R- 500W                 | 292                | 320  | 77   | 8     | 40    | 330 | 300 | 5.2   | 10  | 19  | 9   | 0.5Ω ~ 500KΩ     |
| R- 600W                 | 342                | 380  | 390  | 77    | 8     | 50  | 330 | 300   | 6.2 | 12  | 9   | 1Ω ~ 600KΩ       |
| R- 700W                 | 26                 | 346  | 367  | 400   | 105   | 9   | 50  | 400   | 370 | 6.2 | 9   | 1Ω ~ 700KΩ       |
| R- 800W                 | 12                 | 26   | 416  | 437   | 470   | 105 | 9   | 50    | 460 | 425 | 10  | 1Ω ~ 800KΩ       |
| R-1000W                 | 6.2                | 15   | 26   | 480   | 505   | 533 | 105 | 9     | 60  | 460 | 10  | 1Ω ~ 1MΩ         |
| R-1300W                 | 425                | 6.2  | 15   | 28    | 480   | 505 | 533 | 112   | 10  | 60  | 10  | 1Ω ~ 1.3MΩ       |