



SGS-THOMSON
MICROELECTRONICS

L2720/2/4

LOW DROP DUAL POWER OPERATIONAL AMPLIFIERS


- OUTPUT CURRENT TO 1 A
- OPERATES AT LOW VOLTAGES
- SINGLE OR SPLIT SUPPLY
- LARGE COMMON-MODE AND DIFFERENTIAL MODE RANGE
- LOW INPUT OFFSET VOLTAGE
- GROUND COMPATIBLE INPUTS
- LOW SATURATION VOLTAGE
- THERMAL SHUTDOWN
- CLAMP DIODE

DESCRIPTION

The L2720, L2722 and L2724 are monolithic integrated circuits in powerdip, minidip and SIP-9 packages, intended for use as power operational amplifiers in a wide range of applications including servo amplifiers and power supplies.


They are particularly indicated for driving, inductive loads, as motor and finds applications in compact-disc VCR automotive, etc.

The high gain and high output power capability provide superior performance whatever an operational amplifier/power booster combination is required.

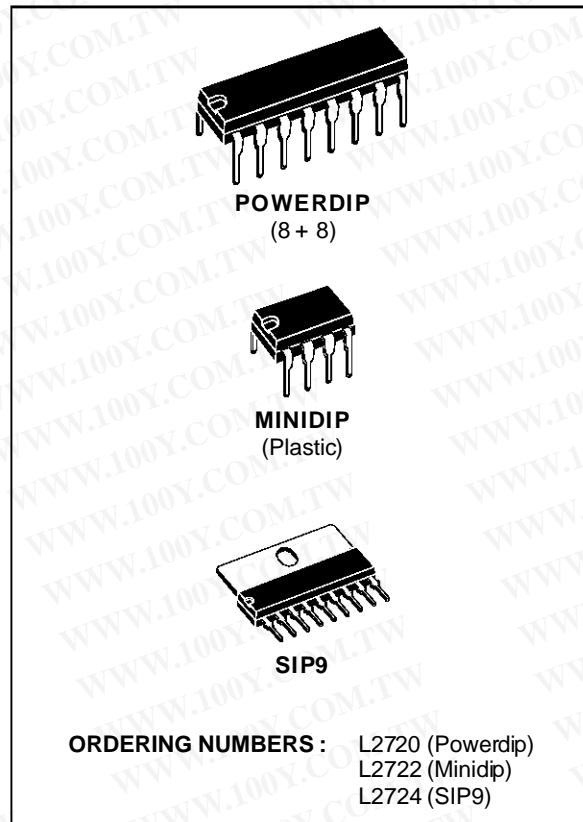

ORDERING NUMBERS : L2720 (Powerdip)
 L2722 (Minidip)
 L2724 (SIP9)


PIN CONNECTIONS (top views)

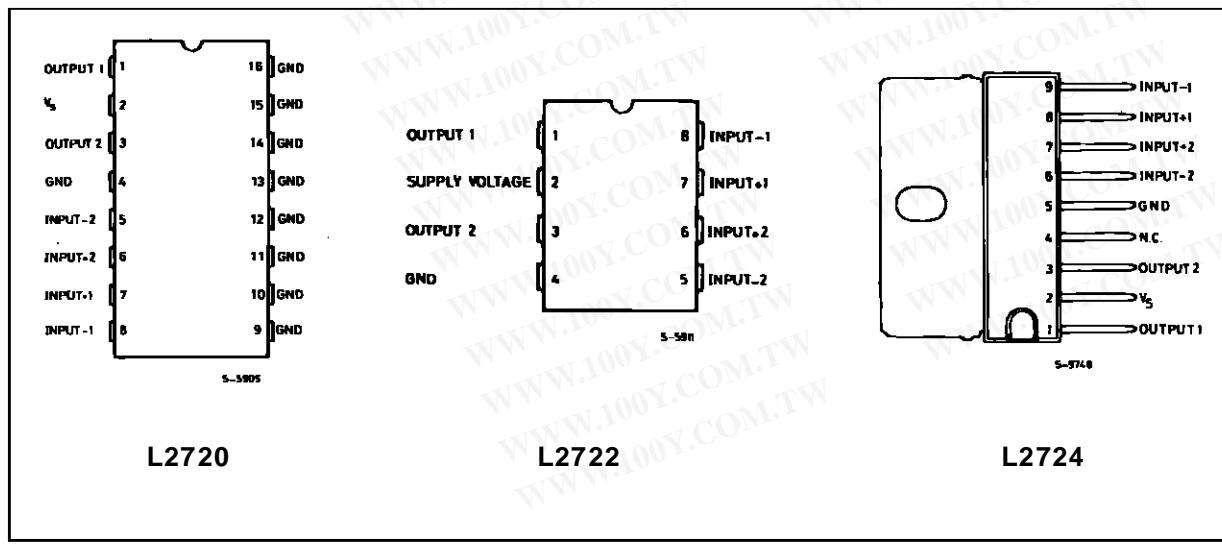


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

L2720/2/4

BLOCK DIAGRAM

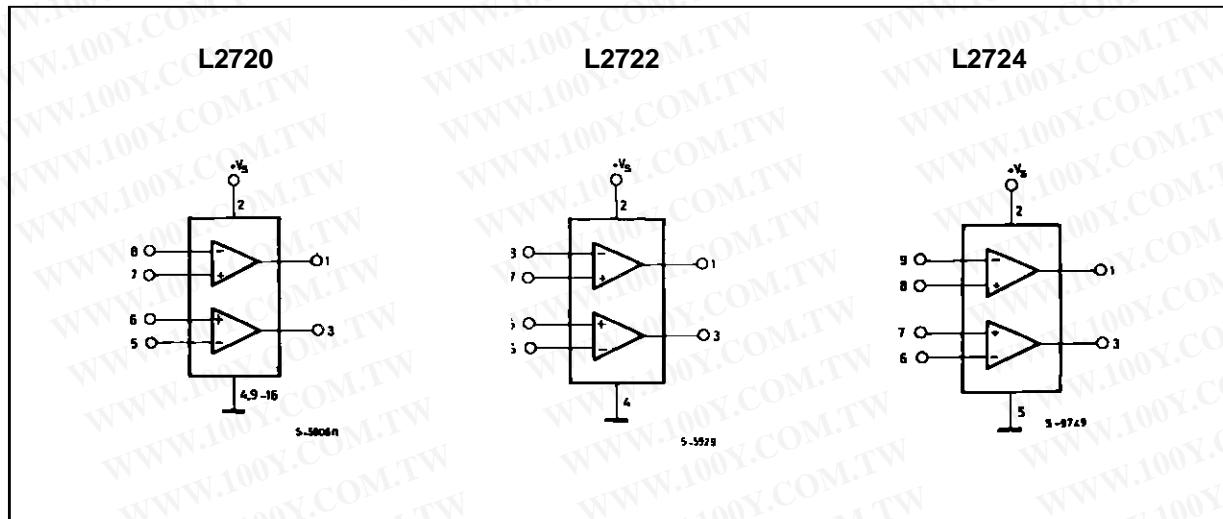

SCHEMATIC DIAGRAM (one section)

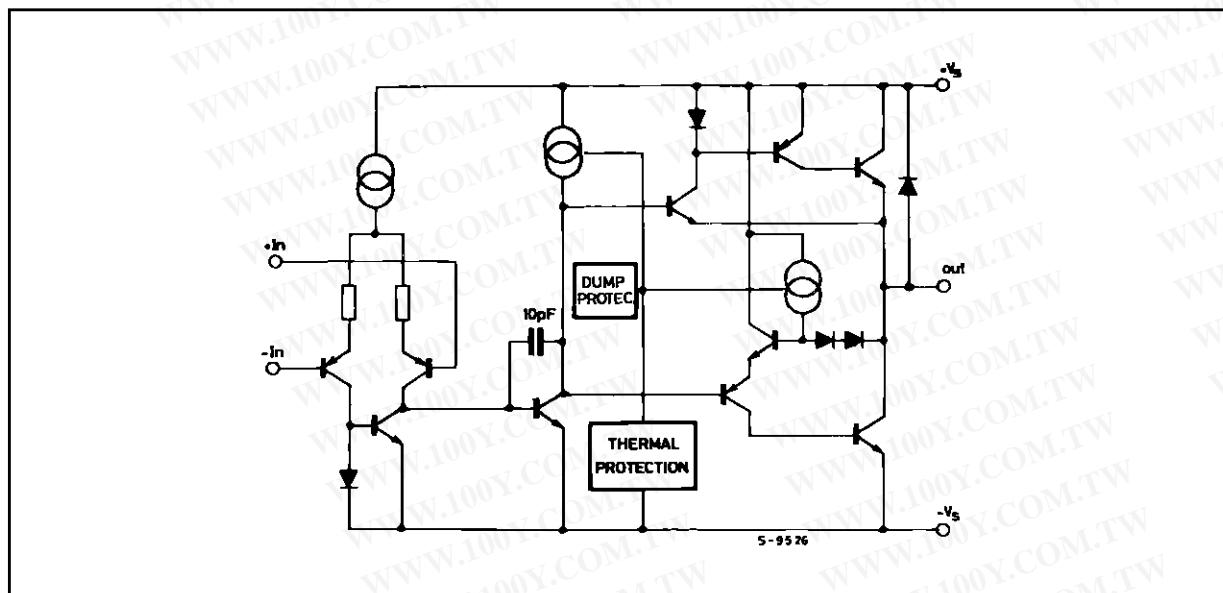

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _s	Supply Voltage	28	V
V _s	Peak Supply Voltage (50ms)	50	V
V _i	Input Voltage	V _s	
V _i	Differential Input Voltage	±V _s	
I _o	DC Output Current	1	A
I _p	Peak Output Current (non repetitive)	1.5	A
P _{tot}	Power Dissipation at T _{amb} = 80°C (L2720), T _{amb} = 50°C (L2722) T _{case} = 75°C (L2720) T _{case} = 50°C (L2724)	1 5 10	W
T _{stg} , T _j	Storage and Junction Temperature	-40 to 150	°C

THERMAL DATA

		SIP-9	Powerdip	Minidip
R _{th j-case}	Thermal Resistance Junction-case	Max.	10°C/W	15°C/W
R _{th j-amb}	Thermal Resistance Junction-ambient	Max.	70°C/W	70°C/W

ELECTRICAL CHARACTERISTICS

V_s = 24V, T_{amb} = 25°C unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _s	Single Supply Voltage		4	28		V
V _s	Split Supply Voltage		± 2		± 14	V
I _s	Quiescent Drain Current	V _o = $\frac{V_s}{2}$ V _s = 24V V _s = 8V		10 9	15 15	mA
I _b	Input Bias Current			0.2	1	μA
V _{os}	Input Offset Voltage				10	mV
I _{os}	Input Offset Current				100	nA
SR	Slew Rate			2		V/μs
B	Gain-bandwidth Product			1.2		MHz
R _i	Input Resistance		500			kΩ
G _v	O.L. Voltage Gain	f = 100Hz f = 1kHz	70 60	80 60		dB
e _N	Input Noise Voltage	B = 22Hz to 22kHz		10		μV
I _N	Input Noise Voltage			200		pA
CMR	Common Mode Rejection	f = 1kHz	66	84		dB
SVR	Supply Voltage Rejection	f = 100Hz R _G = 10kΩ V _R = 0.5V	V _s = 24V V _s = ±12V V _s = ±6V	60 70 75 80		dB
V _{DROP(HIGH)}		V _s = ±2.5V to ±12V	I _p = 100mA I _p = 500mA	0.7 1	1.5	V
V _{DROP(LOW)}		V _s = ±2.5V to ±12V	I _p = 100mA I _p = 500mA	0.3 0.5	1	V
C _s	Channel Separation	f = 1KHz R _L = 10Ω G _v = 30dB	V _s = 24V V _s = 6V	60 60		dB
T _{sd}	Thermal Shutdown Junction Temperature			145		°C

Figure 1 : Quiescent Current vs. Supply Voltage

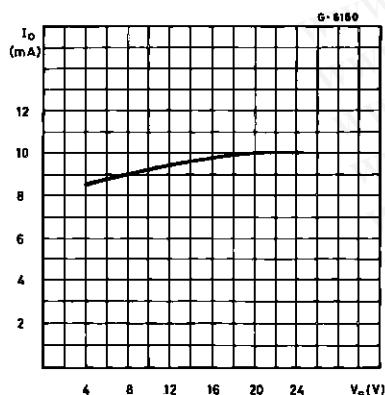


Figure 2 : Open Loop Gain vs. Frequency

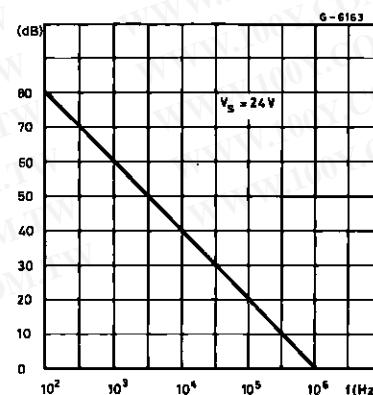


Figure 3 : Common Mode Rejection vs. Frequency

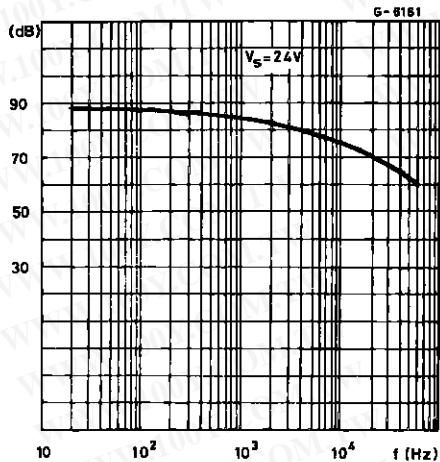


Figure 5 : Output Swing vs. Load Current ($V_S = \pm 12\text{ V}$).

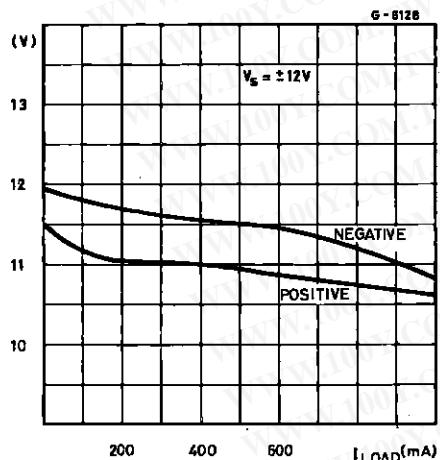


Figure 7 : Channel Separation vs. Frequency

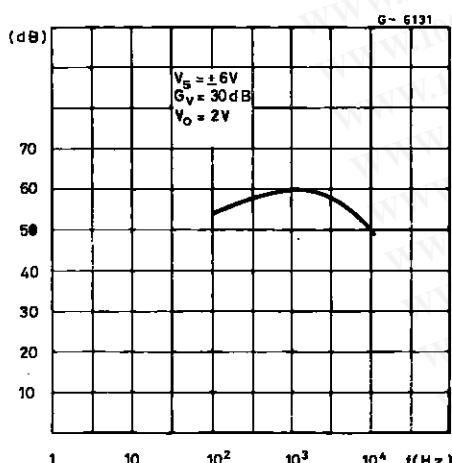


Figure 4 : Output Swing vs. Load Current ($V_S = \pm 5\text{ V}$).


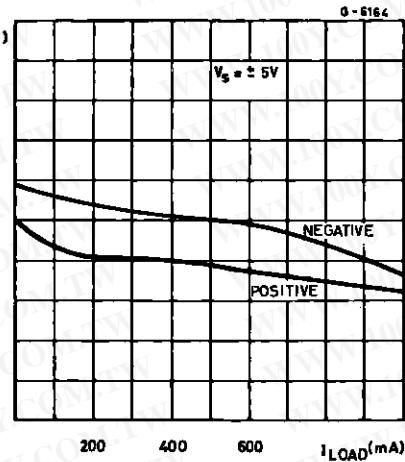


Figure 6 : Supply Voltage rejection vs. Frequency

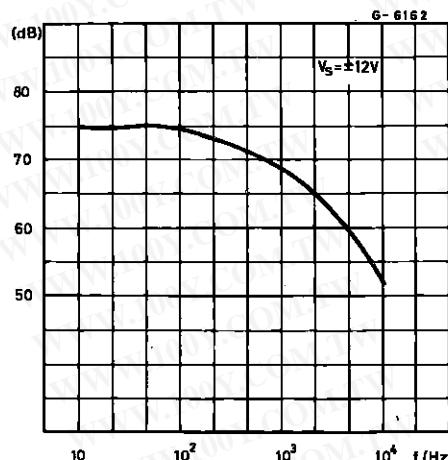

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

APPLICATION SUGGESTION

In order to avoid possible instability occurring into final stage the usual suggestions for the linear power stages are useful, as for instance :

- layout accuracy ;
- A 100nF capacitor connected between supply pins and ground ;

- boucherot cell (0.1 to $0.2 \mu\text{F}$ + 1Ω series) between outputs and ground or across the load. With single supply operation, a resistor ($1\text{k}\Omega$) between the output and supply pin can be necessary for stability.

Figure 8 : Bidirectional DC Motor Control with μP Compatible Inputs

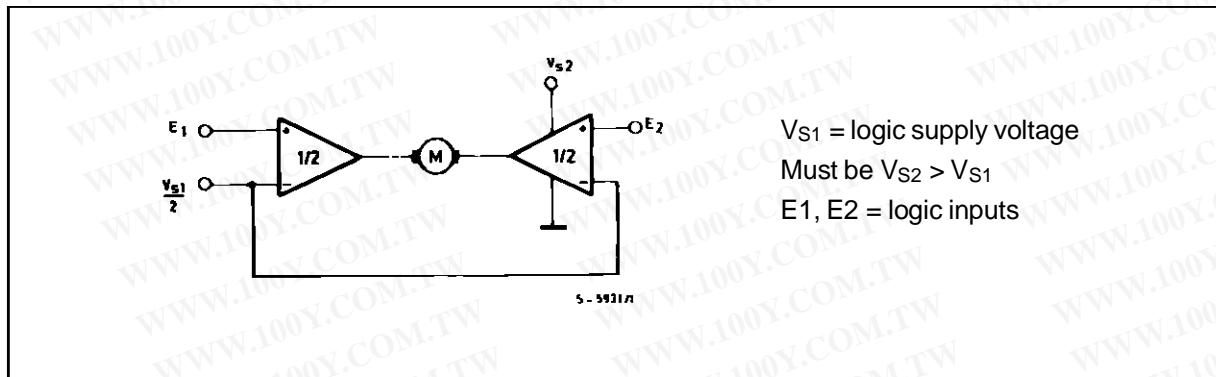


Figure 9 : Servocontrol for Compact-disc

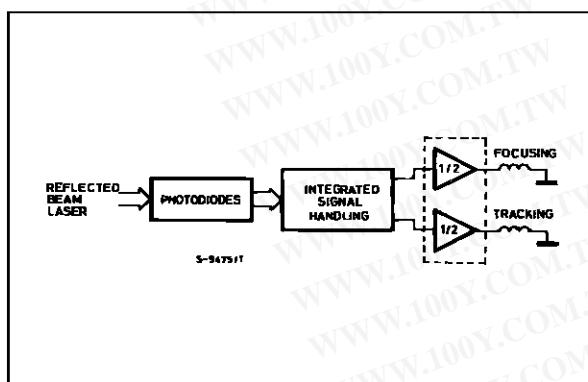


Figure 10 : Capstan Motor Control in Video Recorders

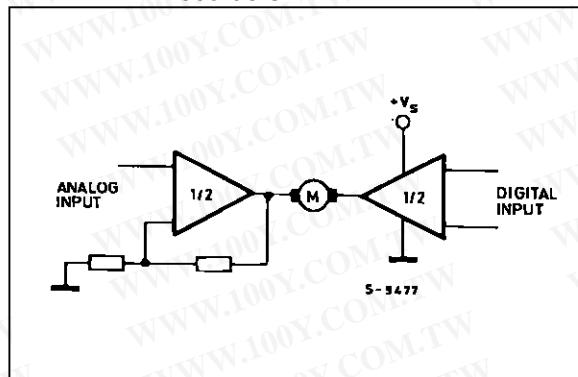


Figure 11 : Motor Current Control Circuit

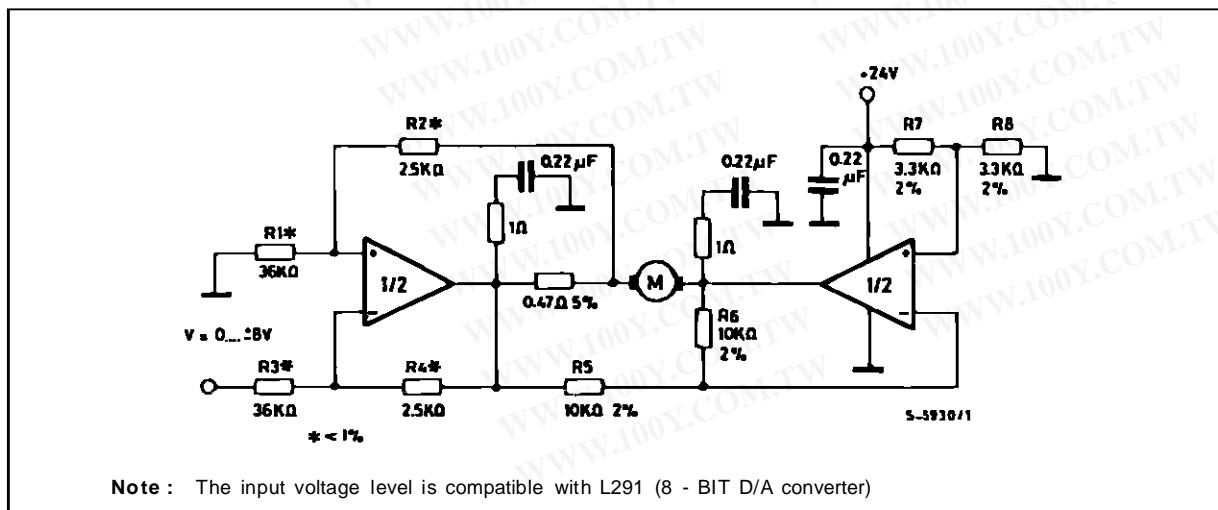
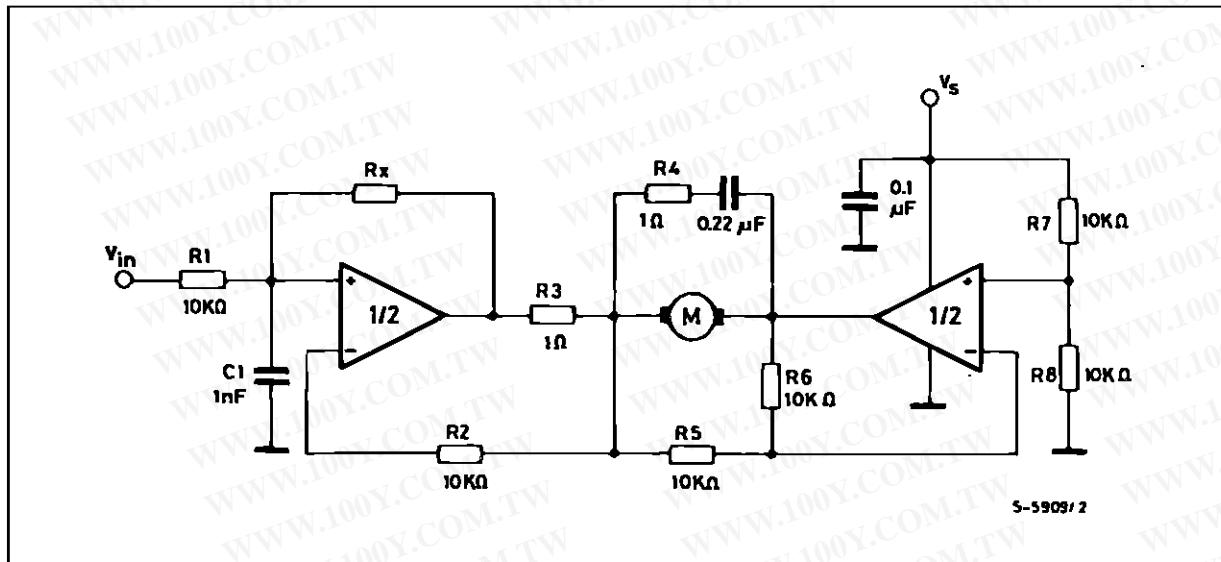
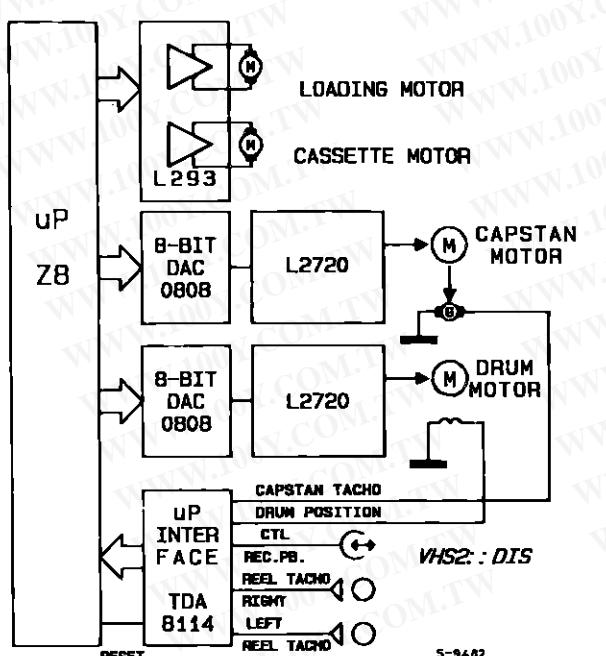


Figure 12 : Bidirectional Speed Control of DC Motors

2R3 · R1


For circuit stability ensure that $R_x > \frac{2R3 \cdot R1}{R_M}$ where R_M = internal resistance of motor.

The voltage available at the terminals of the motor is $V_M = 2(V_t - \frac{V_s}{2}) + |R_o| \cdot I_M$ where $|R_o| = \frac{2R3 \cdot R1}{R_x}$
 and I_M is the motor current.

**Figure 13 :** VHS-VCR Motor Control Circuit

POWERDIP 16 PACKAGE MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
a1	0.51			0.020		
B	0.85		1.40	0.033		0.055
b		0.50			0.020	
b1	0.38		0.50	0.015		0.020
D			20.0			0.787
E		8.80			0.346	
e		2.54			0.100	
e3		17.78			0.700	
F			7.10			0.280
I			5.10			0.201
L		3.30			0.130	
Z			1.27			0.050

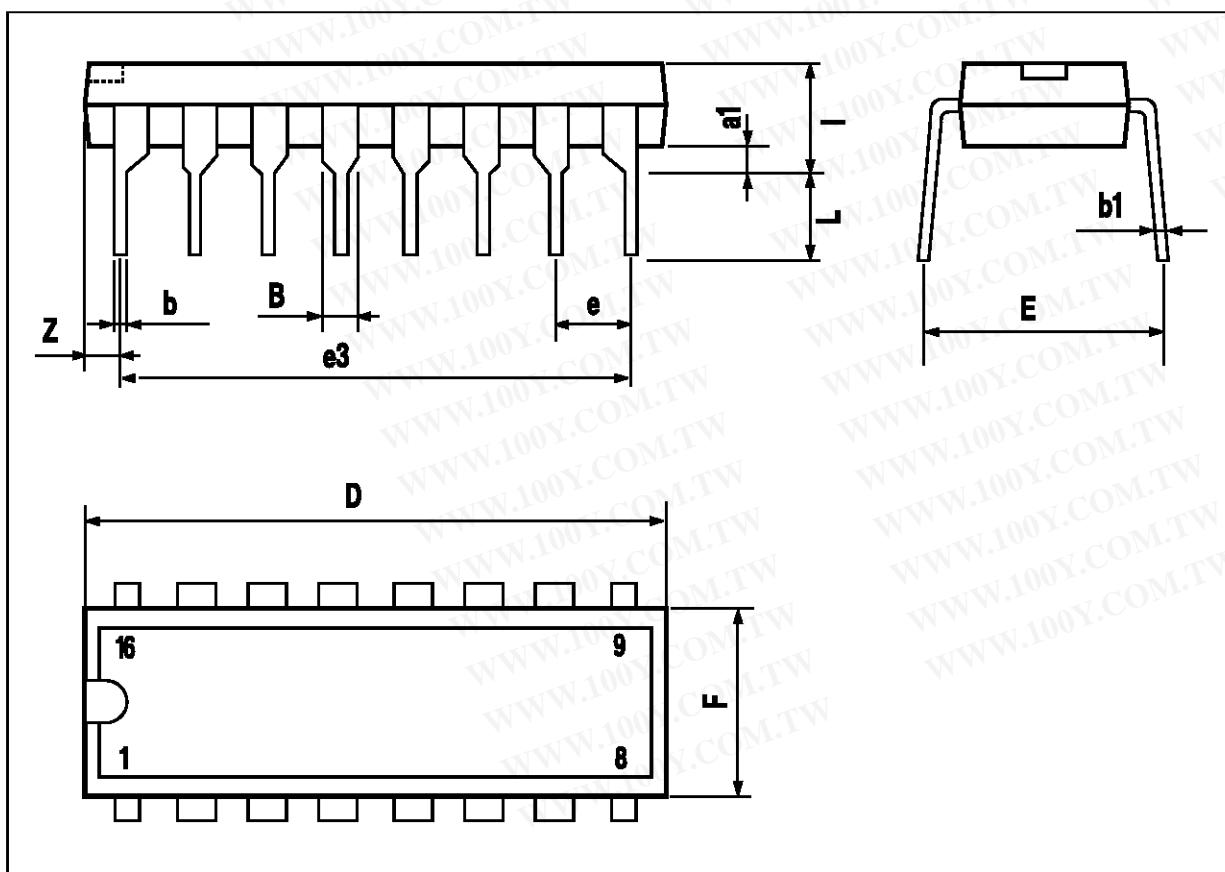


勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

L2720/2/4


MINIDIP PACKAGE MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A		3.3			0.130	
a1	0.7			0.028		
B	1.39		1.65	0.055		0.065
B1	0.91		1.04	0.036		0.041
b		0.5			0.020	
b1	0.38		0.5	0.015		0.020
D			9.8			0.386
E		8.8			0.346	
e		2.54			0.100	
e3		7.62			0.300	
e4		7.62			0.300	
F			7.1			0.280
I			4.8			0.189
L		3.3			0.130	
Z	0.44		1.6	0.017		0.063

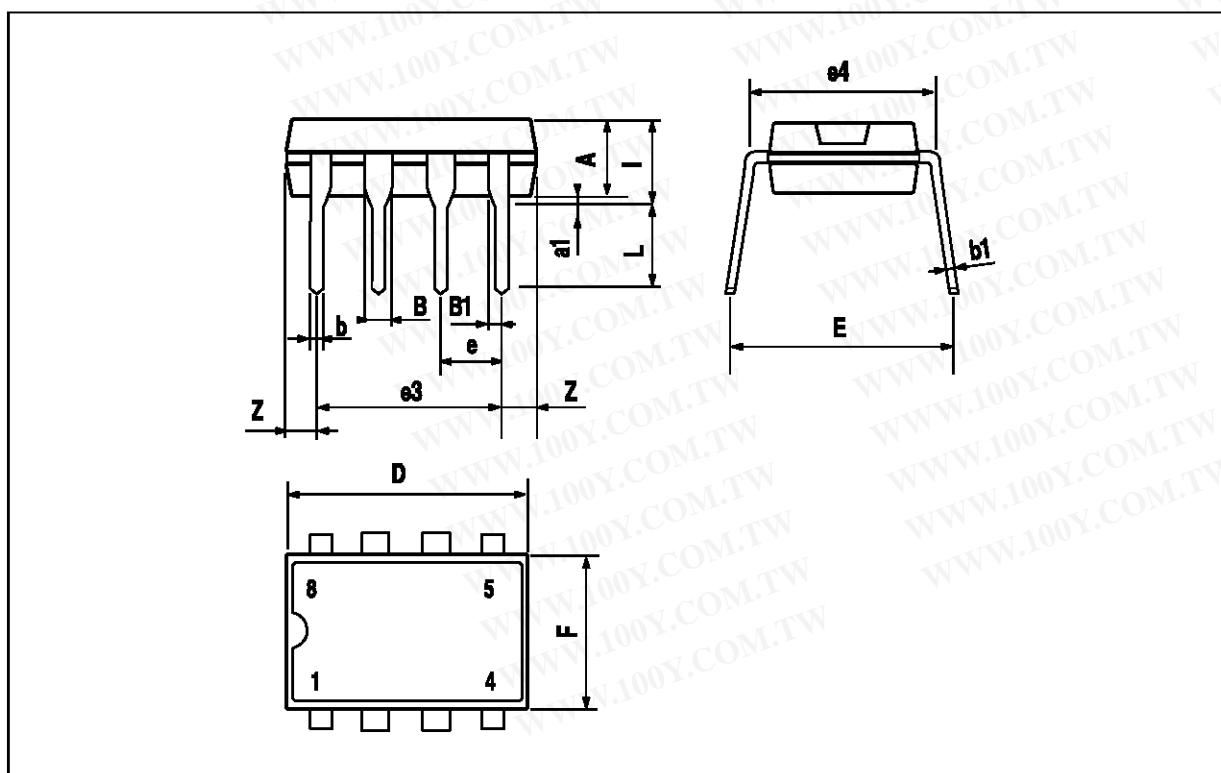

SIP9 PACKAGE MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			7.1			0.280
a1	2.7		3	0.106		0.118
B			23			0.90
B3			24.8			0.976
b1		0.5			0.020	
b3	0.85		1.6	0.033		0.063
C		3.3			0.130	
c1		0.43			0.017	
c2		1.32			0.052	
D			21.2			0.835
d1		14.5			0.571	
e		2.54			0.100	
e3		20.32			0.800	
L	3.1			0.122		
L1		3			0.118	
L2		17.6			0.693	
L3			0.25			0.010
L4	17.4		17.85	0.685		0.702
M		3.2			0.126	
N		1			0.039	
P			0.15			0.006

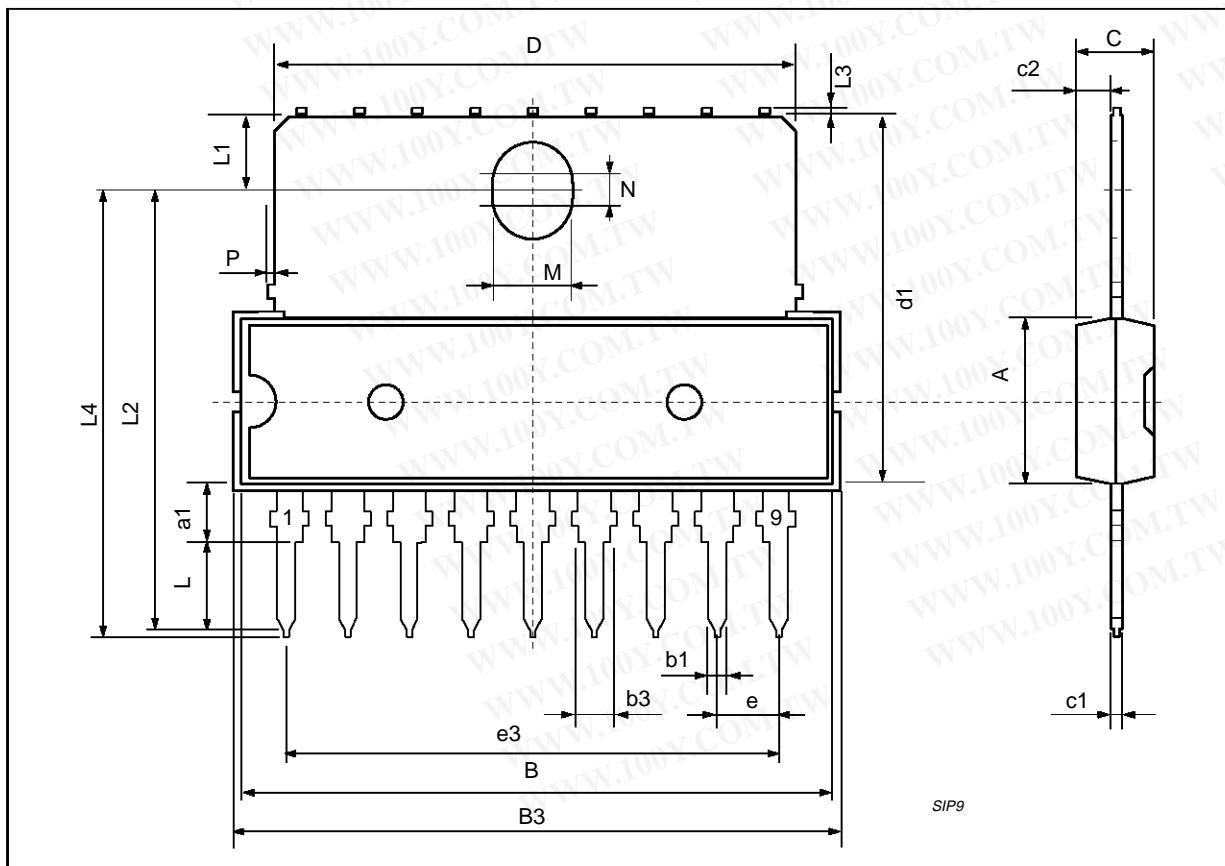

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1996 SGS-THOMSON Microelectronics – Printed in Italy – All Rights Reserved
SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco -
The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.