




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


CB1223V 12V, 2Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY (20hrs) : 2.0Ah	20 hr @ 0.1A : 2.0Ah
● DIMENSIONS	10 hr @ 0.18A : 1.8 Ah
TOTAL HEIGHT : 61 mm (2.41 inches)	5 hr @ 0.32A : 1.6 Ah
CONTAINER HEIGHT : 61 mm (2.41 inches)	1 hr @ 1.2A : 1.2 Ah
LENGTH : 182 mm (7.17 inches)	1 C @ 2.0 A : 1.0 Ah
WIDTH : 24 mm (0.93 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 70 mΩ
WEIGHT : APPROX 0.78 kg (1.72 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 20 A (5 sec)	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 60 A (0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : PC-04	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 0.60 A

Discharge Characteristics 25 °C (77 °F)

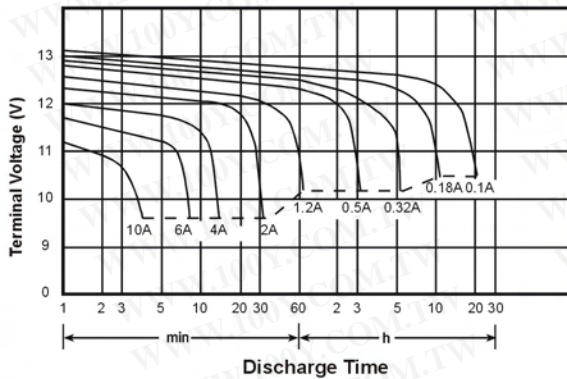


OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

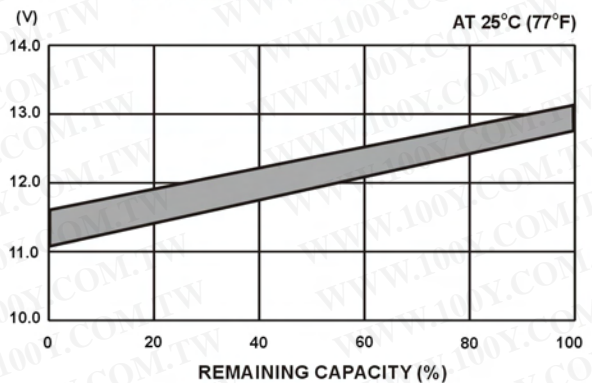

☆ Dimensions

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

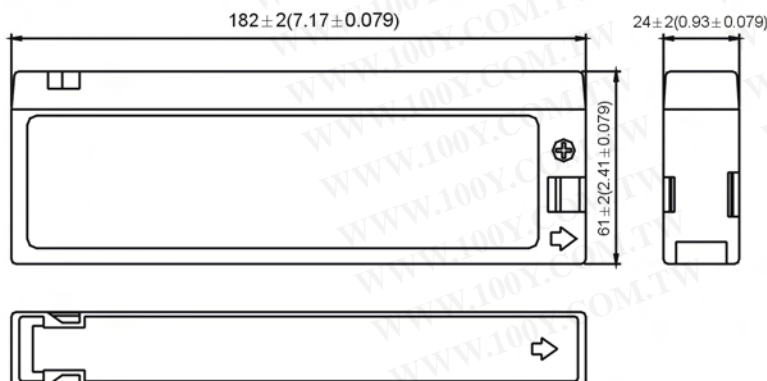

☆ Terminal

