

TLC0834C, TLC0834I, TLC0838C, TLC0838I

8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000


- 8-Bit Resolution
- Easy Microprocessor Interface or Stand-Alone Operation
- Operates Ratiometrically or With 5-V Reference
- 4- or 8-Channel Multiplexer Options With Address Logic
- Input Range 0 to 5 V With Single 5-V Supply
- Remote Operation With Serial Data Link
- Inputs and Outputs Are Compatible With TTL and MOS
- Conversion Time of 32 μ s at $f_{\text{clock}} = 250$ kHz
- Functionally Equivalent to the ADC0834 and ADC0838 Without the Internal Zener Regulator Network
- Total Unadjusted Error . . . ± 1 LSB

description

These devices are 8-bit successive- approximation analog-to-digital converters, each with an input-configurable multichannel multiplexer and serial input/output. The serial input/output is configured to interface with standard shift registers or microprocessors. Detailed information on interfacing with most popular microprocessors is readily available from the factory.

The TLC0834 (4-channel) and TLC0838 (8-channel) multiplexer is software-configured for single-ended or differential inputs as well as pseudodifferential input assignments. The differential analog voltage input allows for common-mode rejection or offset of the analog zero input voltage value. In addition, the voltage reference input can be adjusted to allow encoding of any smaller analog voltage span to the full 8 bits of resolution.

The TLC0834C and TLC0838C are characterized for operation from 0°C to 70°C. The TLC0834I and TLC0838I are characterized for operation from –40°C to 85°C. The TLC0834Q is characterized for operation from –40°C to 125°C.

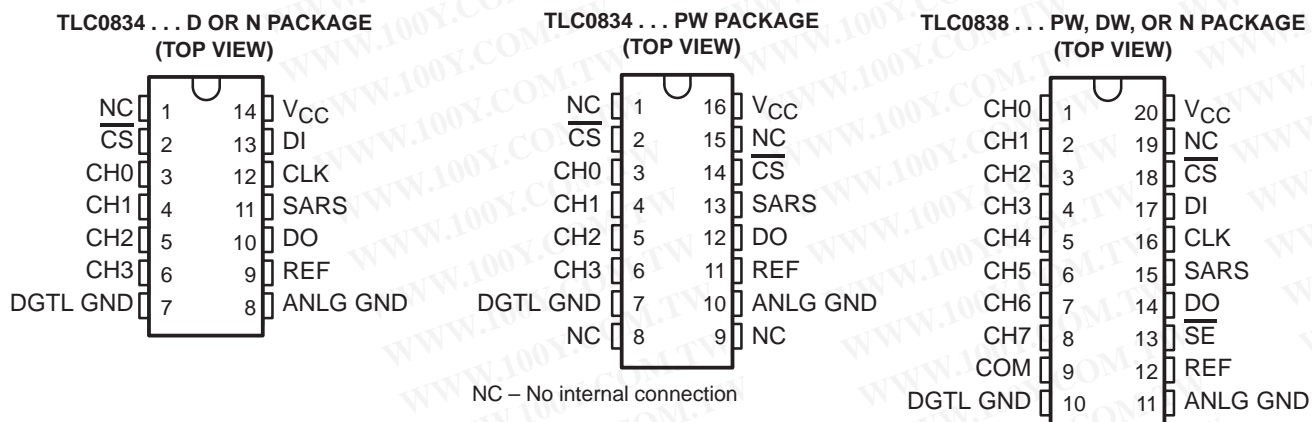

AVAILABLE OPTIONS

| T _A | PACKAGE | | | |
|----------------|-------------------|--------------------|---------------------|-----------------------|
| | SMALL OUTLINE (D) | SMALL OUTLINE (DW) | PLASTIC DIP (N) | TSSOP (PW) |
| 0°C to 70°C | TLC0834CD | TLC0838CDW | TLC0834CN TLC0838CN | TLC0834CPW TLC0838CPW |
| –40°C to 85°C | TLC0834ID | TLC0838IDW | TLC0834IN TLC0838IN | TLC0834IPW TLC0838IPW |
| –40°C to 125°C | — | — | TLC0834QN — | — |



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.


PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2000, Texas Instruments Incorporated

functional block diagram

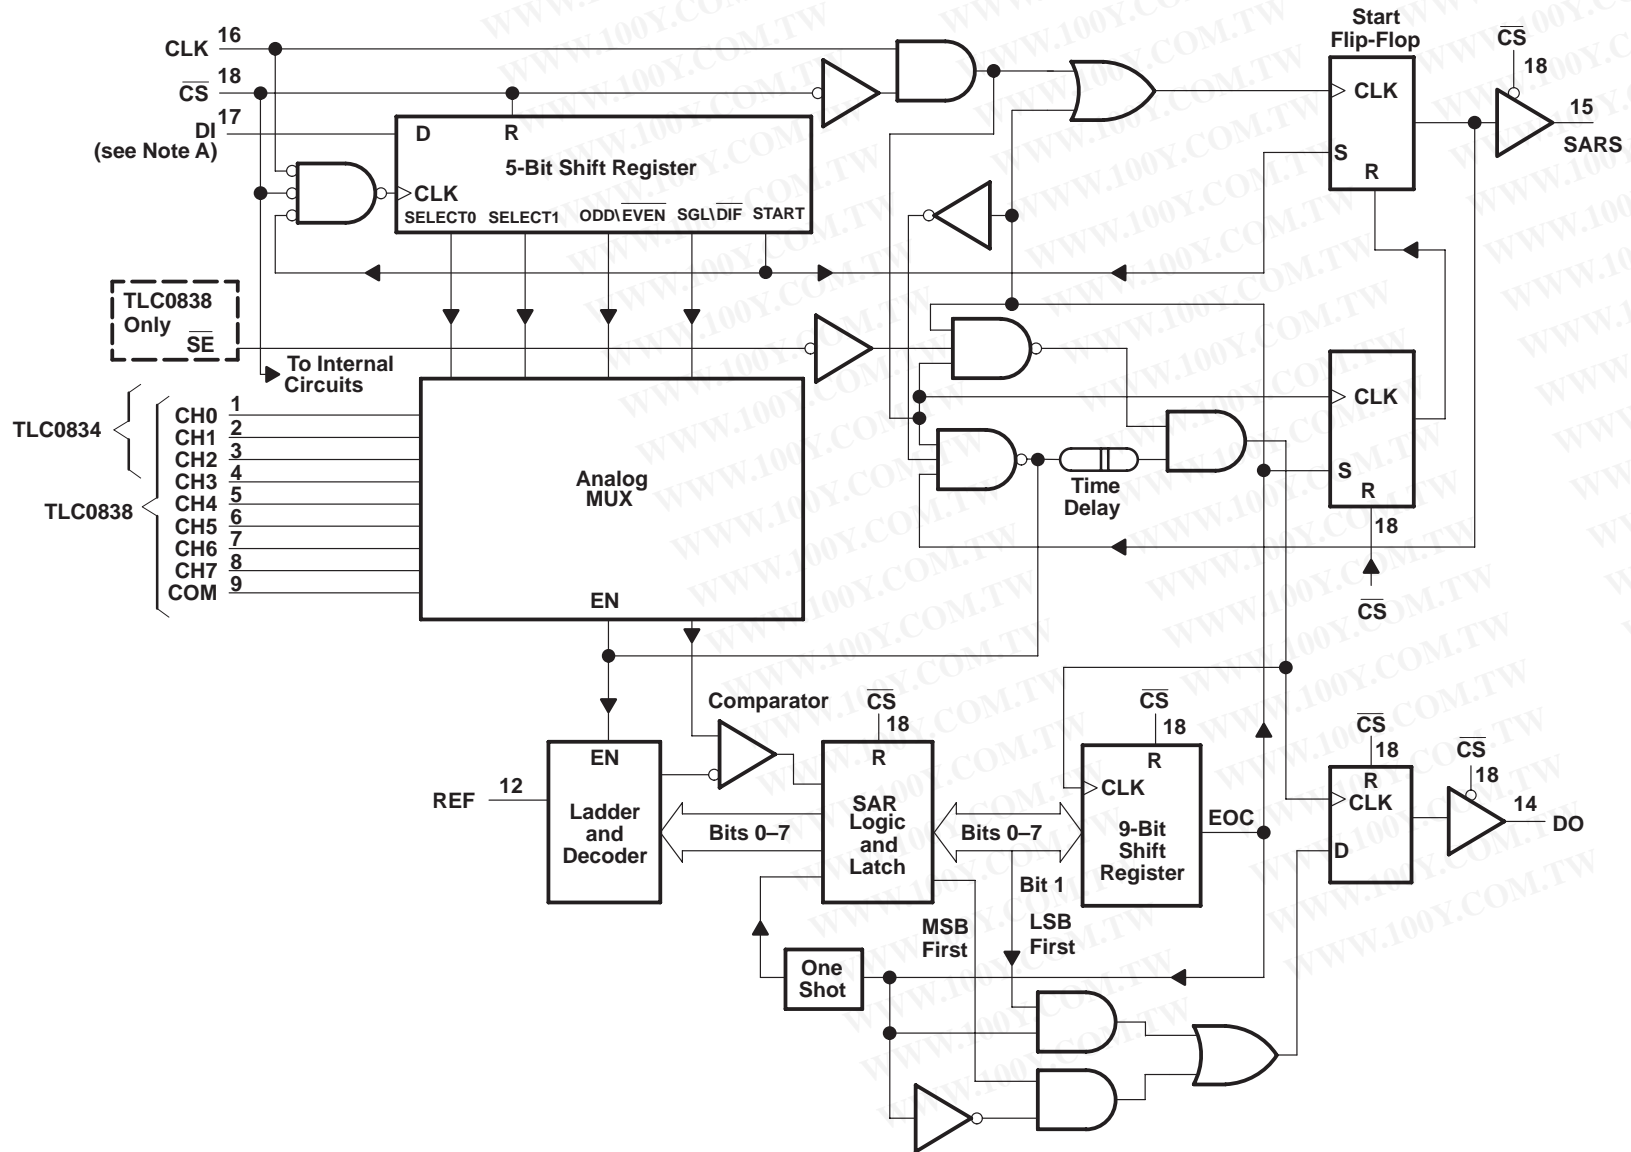

NOTES A: For the TLC0834, DI is input directly to the D input of SELECT1; SELECT0 is forced to a high.

B: Terminal numbers shown are for the DW or N package.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

functional description

The TLC0834 and TLC0838 use a sample-data-comparator structure that converts differential analog inputs by a successive-approximation routine. Operation of both devices is similar with the exception of \overline{SE} , an analog common input, and multiplexer addressing. The input voltage to be converted is applied to a channel terminal and is compared to ground (single ended), to an adjacent input (differential), or to a common terminal (pseudo differential) that can be an arbitrary voltage. The input terminals are assigned a positive (+) or negative (–) polarity. When the signal input applied to the assigned positive terminal is less than the signal on the negative terminal, the converter output is all zeros.

Channel selection and input configuration are under software control using a serial-data link from the controlling processor. A serial-communication format allows more functions to be included in a converter package with no increase in size. In addition, it eliminates the transmission of low-level analog signals by locating the converter at the analog sensor and communicating serially with the controlling processor. This process returns noise-free digital data to the processor.

A particular input configuration is assigned during the multiplexer-addressing sequence. The multiplexer address shifts into the converter through the data input (DI) line. The multiplexer address selects the analog inputs to be enabled and determines whether the input is single ended or differential. When the input is differential, the polarity of the channel input is assigned. Differential inputs are assigned to adjacent channel pairs. For example, channel 0 and channel 1 may be selected as a differential pair. These channels cannot act differentially with any other channel. In addition to selecting the differential mode, the polarity may also be selected. Either channel of the channel pair may be designated as the negative or positive input.

The common input on the TLC0838 can be used for a pseudodifferential input. In this mode, the voltage on the common input is considered to be the negative differential input for all channel inputs. This voltage can be any reference potential common to all channel inputs. Each channel input can then be selected as the positive differential input. This feature is useful when all analog circuits are biased to a potential other than ground.

A conversion is initiated by setting \overline{CS} low, which enables all logic circuits. \overline{CS} must be held low for the complete conversion process. A clock input is then received from the processor. On each low-to-high transition of the clock input, the data on DI is clocked into the multiplexer-address shift register. The first logic high on the input is the start bit. A 3- to 4-bit assignment word follows the start bit. On each successive low-to-high transition of the clock input, the start bit and assignment word are shifted through the shift register. When the start bit is shifted into the start location of the multiplexer register, the input channel is selected and conversion starts. The SAR status output (SARS) goes high to indicate that a conversion is in progress, and DI to the multiplexer shift register is disabled for the duration of the conversion.

An interval of one clock period is automatically inserted to allow the selected multiplexed channel to settle. DO comes out of the high-impedance state and provides a leading low for one clock period of multiplexer settling time. The SAR comparator compares successive outputs from the resistive ladder with the incoming analog signal. The comparator output indicates whether the analog input is greater than or less than the resistive-ladder output. As the conversion proceeds, conversion data is simultaneously output from DO, with the most significant bit (MSB) first. After eight clock periods, the conversion is complete and SARS goes low.

The TLC0834 outputs the least-significant-bit (LSB) first data after the MSB-first data stream. When \overline{SE} is held high on the TLC0838, the value of the LSB remains on the data line. When \overline{SE} is forced low, the data is then clocked out as LSB-first data. (To output LSB first, \overline{SE} must first go low, then the data stored in the 9-bit shift register outputs LSB first.) When \overline{CS} goes high, all internal registers are cleared. At this time, the output circuits go to the high-impedance state. If another conversion is desired, \overline{CS} must make a high-to-low transition followed by address information.


DI and DO can be tied together and controlled by a bidirectional processor I/O bit received on a single wire. This is possible because DI is only examined during the multiplexer-addressing interval and DO is still in the high-impedance state.

TLC0834C, TLC0834I, TLC0838C, TLC0838I
8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

sequence of operation

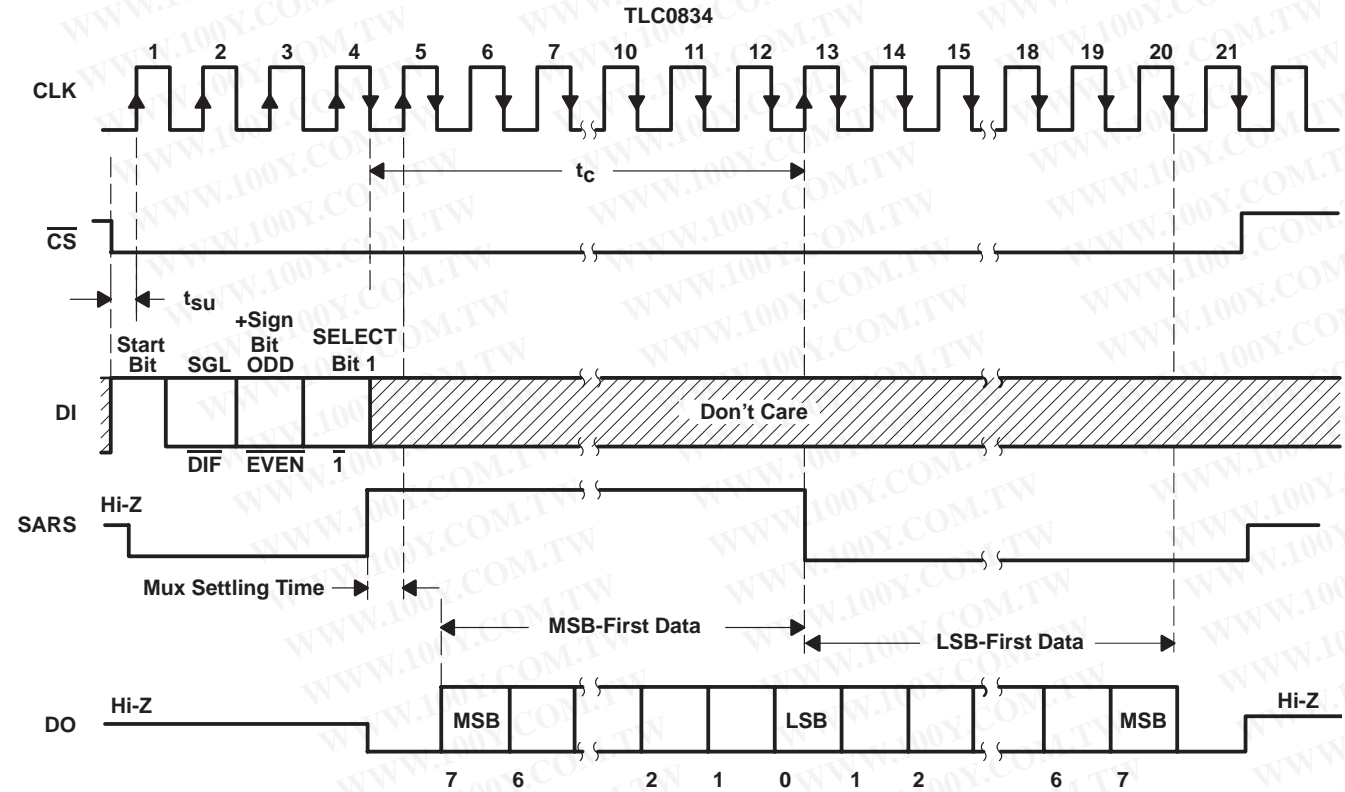

TLC0834 MUX-ADDRESS CONTROL LOGIC TABLE

| MUX ADDRESS | | | CHANNEL NUMBER | | | |
|-----------------------|------------------------|--------------|----------------|-----|-----|-----|
| SGL/ \overline{DIF} | ODD/ \overline{EVEN} | SELECT BIT 1 | CH0 | CH1 | CH2 | CH3 |
| L | L | L | + | - | | |
| L | L | H | | | + | - |
| L | H | L | - | + | | |
| L | H | H | | | - | + |
| H | L | L | + | | | |
| H | L | H | | | + | |
| H | H | L | | + | | |
| H | H | H | | | | + |

H = high level, L = low level, - or + = terminal polarity for the selected input channel




TLC0834C, TLC0834I, TLC0838C, TLC0838I

8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

sequence of operation

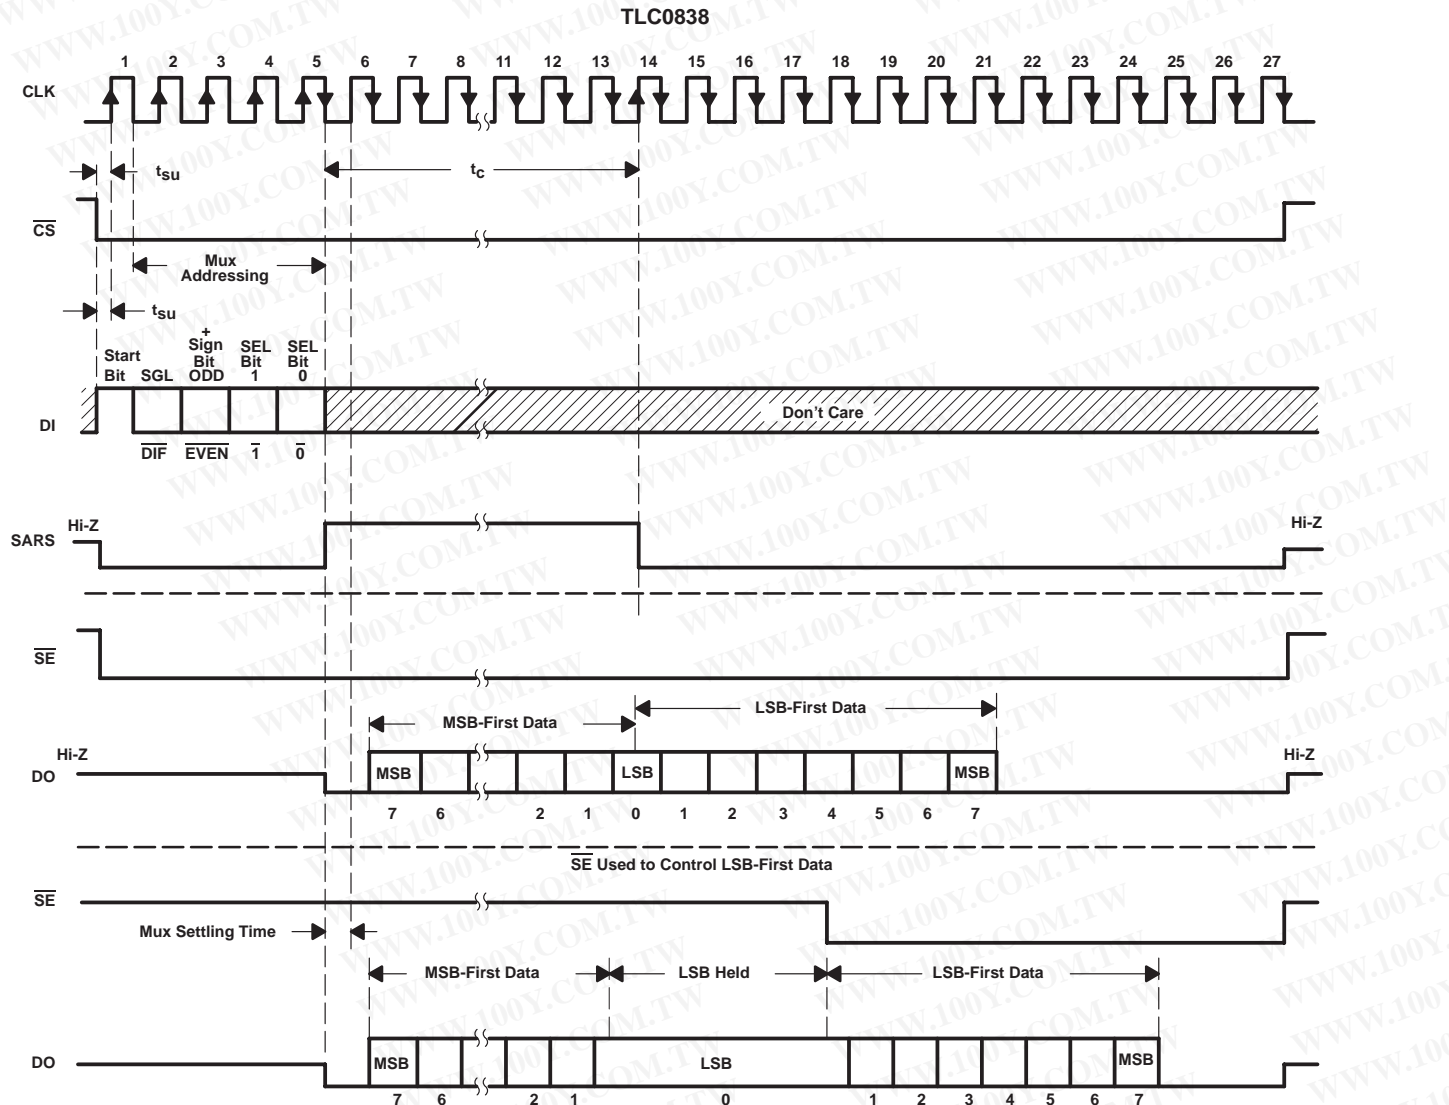

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

[Http://www.100y.com.tw](http://www.100y.com.tw)

| MUX ADDRESS | | SELECT | | SELECTED CHANNEL NUMBER | | | | | | | | COM |
|-------------|----------|--------|---|-------------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| SGL/DIF | ODD/EVEN | | | 0 | | 1 | | 2 | | 3 | | |
| | | 1 | 0 | CH0 | CH1 | CH2 | CH3 | CH4 | CH5 | CH6 | CH7 | |
| L | L | L | L | + | - | | | | | | | |
| L | L | L | H | | | + | - | | | | | |
| L | L | H | L | | | | | + | - | | | |
| L | L | H | H | | | | | | | + | - | |
| L | H | L | L | - | + | | | | | | | |
| L | H | L | H | | | - | + | | | | | |
| L | H | H | L | | | | | - | + | | | |
| L | H | H | H | | | | | | | - | + | |
| H | L | L | L | + | | | | | | | | - |
| H | L | L | H | | | + | | | | | | - |
| H | L | H | L | | | | | + | | | | - |
| H | L | H | H | | | | | | | + | | - |
| H | H | L | L | | + | | | | | | | - |
| H | H | L | H | | | + | | | | | | - |
| H | H | H | L | | | | | + | | | | - |
| H | H | H | H | | | | | | | + | | - |

absolute maximum ratings over recommended operating free-air temperature range (unless otherwise noted)[†]

| | |
|---|----------------------------|
| Supply voltage, V_{CC} (see Note 1) | 6.5 V |
| Input voltage range: Logic | -0.3 V to $V_{CC} + 0.3$ V |
| Analog | -0.3 V to $V_{CC} + 0.3$ V |
| Input current, I_I | ± 5 mA |
| Total input current | ± 20 mA |
| Operating free-air temperature range, T_A : C suffix | 0°C to 70°C |
| I suffix | -40°C to 85°C |
| Storage temperature range, T_{stg} | -65°C to 150°C |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: N package | 260°C |

NOTE 1: All voltage values, except differential voltages, are with respect to the network ground terminal.

TLC0834C, TLC0834I, TLC0838C, TLC0838I

8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

recommended operating conditions

| | MIN | NOM | MAX | UNIT |
|---|----------|-----|-----|------|
| Supply voltage, V_{CC} | 4.5 | 5 | 5.5 | V |
| High-level input voltage, V_{IH} | 2 | | | V |
| Low-level input voltage, V_{IL} | | | 0.8 | V |
| Clock frequency, $f_{(clock)}$ | 10 | | 600 | kHz |
| Clock duty cycle (see Note 2) | 40% | | 60% | |
| Pulse duration, \overline{CS} high, t_w | 220 | | | ns |
| Setup time, \overline{CS} low, \overline{SE} low, or data valid before $CLK\uparrow$, t_{SU} (see Figures 1 and 2) | 350 | | | ns |
| Hold time, data valid after $CLK\uparrow$, t_H (see Figure 1) | 90 | | | ns |
| Operating free-air temperature, T_A | C suffix | 0 | 70 | °C |
| | I suffix | -40 | 85 | |

NOTE 2: The clock-duty-cycle range ensures proper operation at all clock frequencies. When a clock frequency is used outside the recommended duty-cycle range, the minimum pulse duration (high or low) is 1 μ s.

electrical characteristics over recommended range of operating free-air temperature, $V_{CC} = 5$ V, $f_{(clock)} = 250$ kHz (unless otherwise noted)

digital section

| PARAMETER | TEST CONDITION [†] | C SUFFIX | | | I SUFFIX | | | UNIT |
|---|--|----------|------------------|------|----------|------------------|-----|---------|
| | | MIN | TYP [‡] | MAX | MIN | TYP [‡] | MAX | |
| V_{OH} High-level output voltage | $V_{CC} = 4.75$ V, $I_{OH} = -360$ μ A | 2.8 | | | 2.4 | | | V |
| | $V_{CC} = 4.75$ V, $I_{OH} = -10$ μ A | 4.6 | | | 4.5 | | | |
| V_{OL} Low-level output voltage | $V_{CC} = 5.25$ V, $I_{OL} = 1.6$ mA | | | 0.34 | | | 0.4 | V |
| I_{IH} High-level input current | $V_{IH} = 5$ V, $V_{IL} = 5$ V | | 0.005 | 1 | | 0.005 | 1 | μ A |
| I_{IL} Low-level input current | $V_{IL} = 0$, $V_{IH} = 5$ V | | -0.005 | -1 | | -0.005 | -1 | μ A |
| I_{OH} High-level output (source) current | $V_{OH} = 0$, $T_A = 25^\circ$ C | -6.5 | -24 | | -6.5 | -24 | | mA |
| I_{OL} Low-level output (sink) current | $V_{OL} = V_{CC}$, $T_A = 25^\circ$ C | 8 | 26 | | 8 | 26 | | mA |
| I_{OZ} High-impedance-state output current (DO or SARS) | $V_O = 5$ V, $T_A = 25^\circ$ C | | 0.01 | 3 | | 0.01 | 3 | μ A |
| | $V_O = 0$, $T_A = 25^\circ$ C | | -0.01 | -3 | | -0.01 | -3 | |
| C_i Input capacitance | | | | | | 5 | | pF |
| C_o Output capacitance | | | | | | 5 | | pF |

[†] All parameters are measured under open-loop conditions with zero common-mode input voltage (unless otherwise specified).

[‡] All typical values are at $V_{CC} = 5$ V, $T_A = 25^\circ$ C.

TLC0834C, TLC0834I, TLC0838C, TLC0838I

8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

electrical characteristics over recommended range of operating free-air temperature, $V_{CC} = 5\text{ V}$, $f_{\text{clock}} = 250\text{ kHz}$ (unless otherwise noted) (continued)

analog and converter section

| PARAMETER | | TEST CONDITIONS† | MIN | TYP‡ | MAX | UNIT |
|-----------------------|------------------------------------|------------------|------------------------------|------|-----|---------------|
| V_{IC} | Common-mode input voltage | See Note 3 | –0.05 to $V_{CC}+0.05$ | | | V |
| $I_{I(\text{stdby})}$ | Standby input current (see Note 4) | On channel | $V_I = 5\text{ V}$ | | 1 | μA |
| | | Off channel | $V_I = 0$ | | –1 | |
| | | On channel | $V_I = 0$ | | –1 | |
| | | Off channel | $V_I = 5\text{ V}$ | | 1 | |
| $r_{i(\text{REF})}$ | Input resistance to REF | | 1.3 | 2.4 | 5.9 | k Ω |

† All parameters are measured under open-loop conditions with zero common-mode input voltage.

‡ All typical values are at $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$.

- NOTES: 3. When channel IN– is more positive than channel IN+, the digital output code is 0000 0000. Connected to each analog input are two on-chip diodes that conduct forward current for analog input voltages one diode drop above V_{CC} . Care must be taken during testing at low V_{CC} levels (4.5 V) because high-level analog input voltage (5 V) can, especially at high temperatures, cause the input diode to conduct and cause errors for analog inputs that are near full scale. As long as the analog voltage does not exceed the supply voltage by more than 50 mV, the output code is correct. To achieve an absolute 0- to 5-V input range requires a minimum V_{CC} of 4.950 V for all variations of temperature and load.
4. Standby input currents go in or out of the on or off channels when the A/D converter is not performing conversion and the clock is in a high or low steady-state condition.

total device

| PARAMETER | | MIN | TYP‡ | MAX | UNIT |
|-----------|----------------|-----|------|------|------|
| I_{CC} | Supply current | | 0.6 | 1.25 | mA |

‡ All typical values are at $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$.

operating characteristics, $V_{CC} = 5\text{ V}$, $f_{\text{clock}} = 250\text{ kHz}$, $t_r = t_f = 20\text{ ns}$, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS§ | MIN | TYP | MAX | UNIT |
|-------------------------------------|--|---|-----|------------|-----------|---------------|
| Supply-voltage variation error | | $V_{CC} = 4.75\text{ V to } 5.25\text{ V}$ | | $\pm 1/16$ | $\pm 1/4$ | LSB |
| Total unadjusted error (see Note 5) | | $V_{\text{ref}} = 5\text{ V}$, $T_A = \text{MIN to MAX}$ | | | ± 1 | LSB |
| Common-mode error | | Differential mode | | $\pm 1/16$ | $\pm 1/4$ | LSB |
| t_{pd} | Propagation delay time, output data after CLK↓ (see Note 6 and Figure 2) | MSB-first data | | | 1500 | ns |
| | | LSB-first data | | | 600 | |
| t_{dis} | Output disable time, DO or SARS after CS↑ (see Figure 3) | $C_L = 10\text{ pF}$, $R_L = 10\text{ k}\Omega$ | | | 250 | ns |
| | | $C_L = 100\text{ pF}$, $R_L = 2\text{ k}\Omega$ | | | 500 | |
| t_c | Conversion time (multiplexer-addressing time not included) | | | | 8 | clock periods |

§ All parameters are measured under open-loop conditions with zero common-mode input voltage. For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

NOTES: 5. Total unadjusted error includes offset, full-scale, linearity, and multiplexer errors.

6. The MSB-first data is output directly from the comparator and, therefore, requires additional delay to allow for comparator response time.



PARAMETER MEASUREMENT INFORMATION

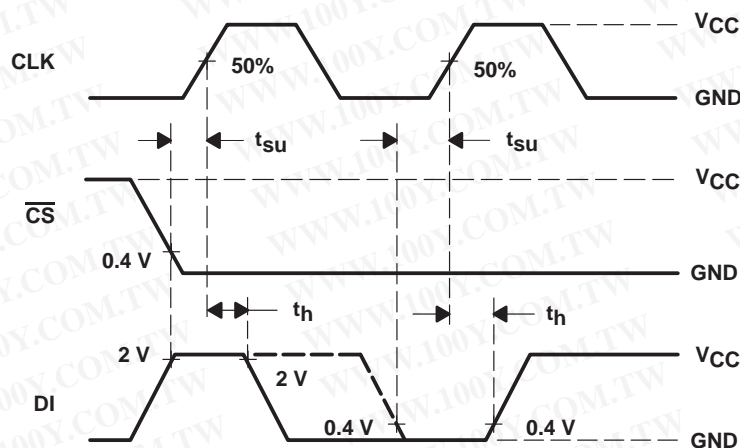


Figure 1. Data-Input Timing


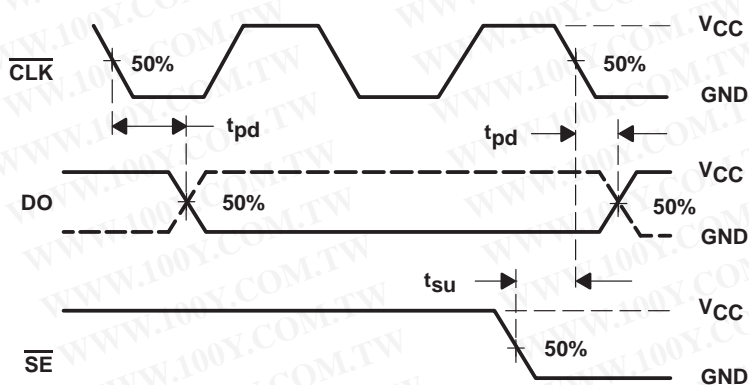


Figure 2. Data-Output Timing

PARAMETER MEASUREMENT INFORMATION

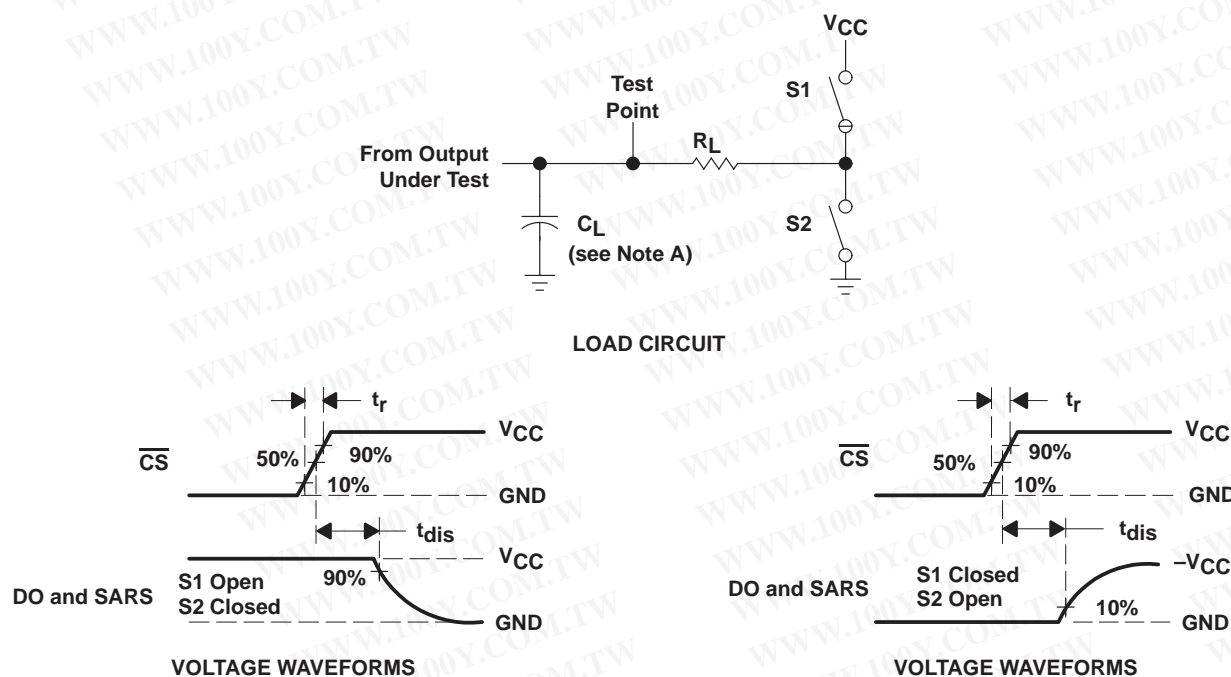

NOTE A: C_L includes probe and jig capacitance.

Figure 3. Output Disable Time Test Circuit and Voltage Waveforms

TYPICAL CHARACTERISTICS

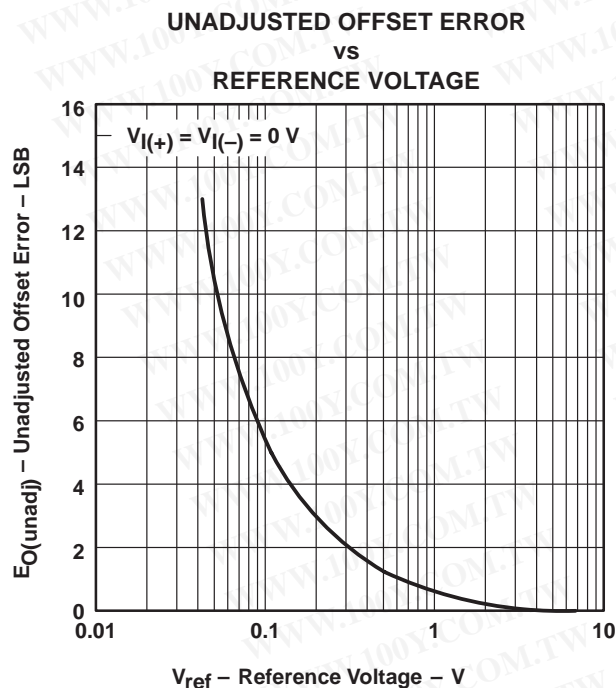


Figure 4

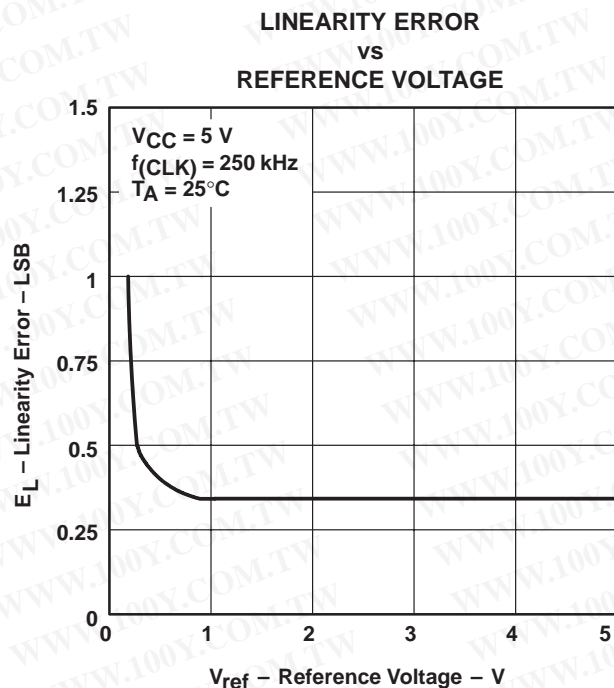


Figure 5

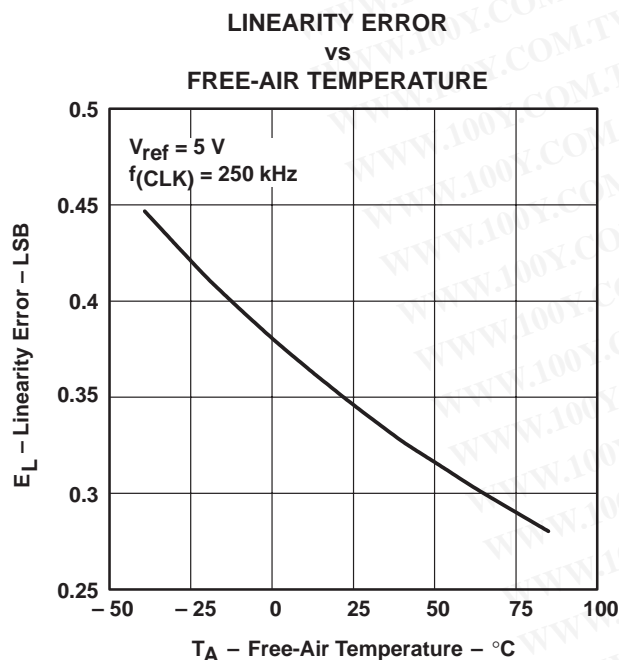


Figure 6

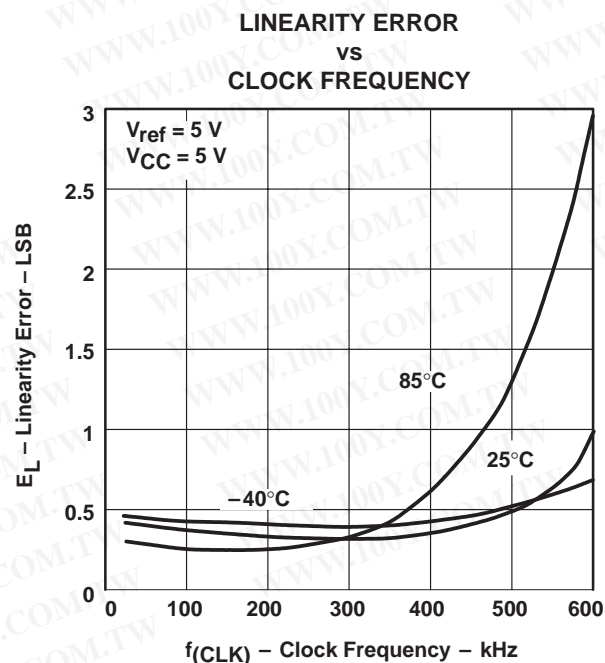


Figure 7

TYPICAL CHARACTERISTICS

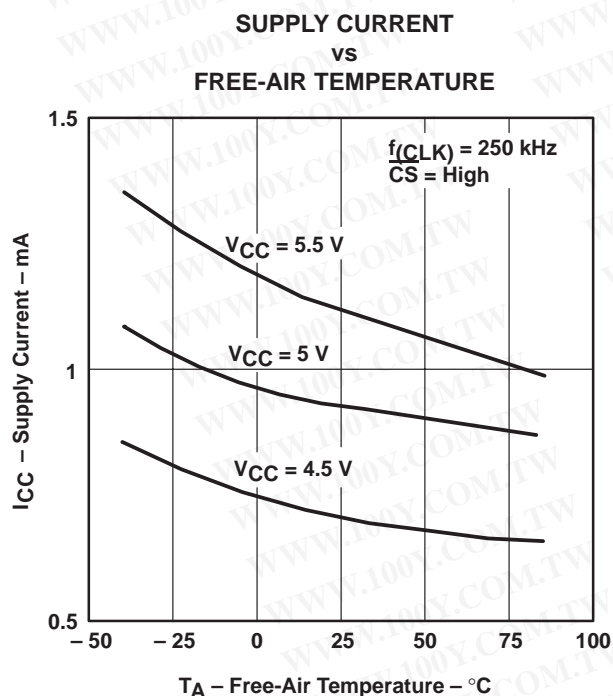


Figure 8

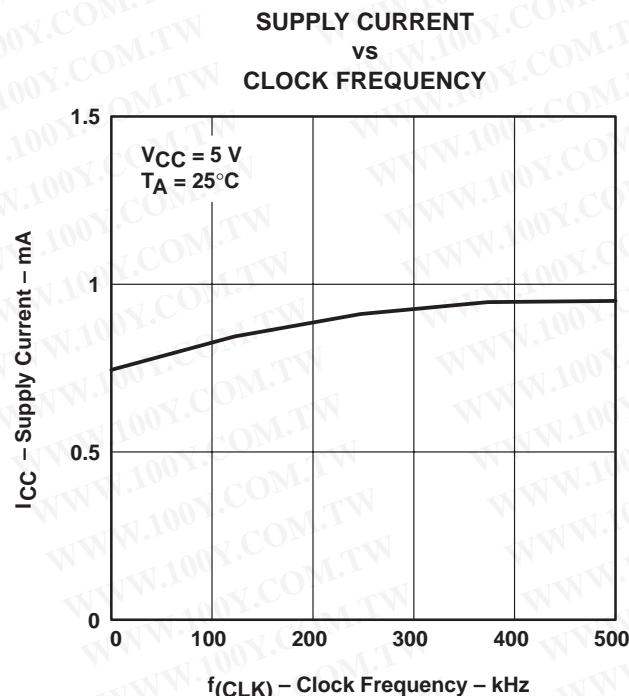


Figure 9

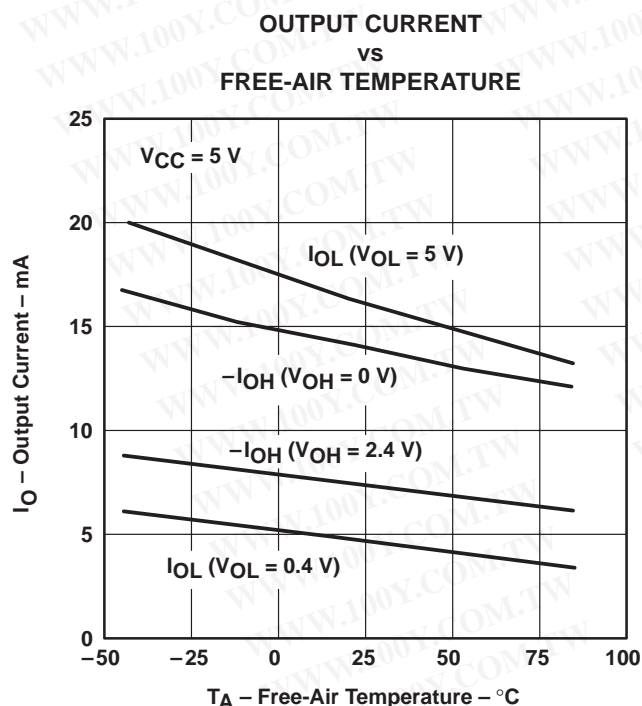


Figure 10

TYPICAL CHARACTERISTICS

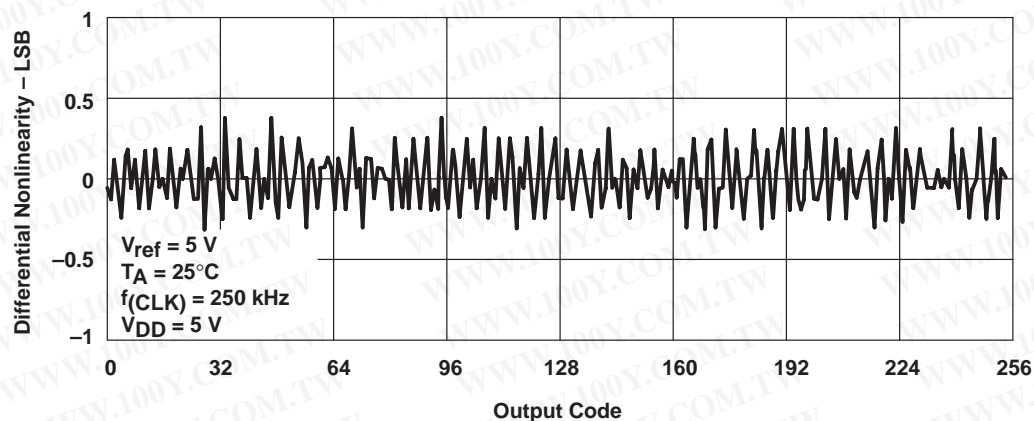


Figure 11. Differential Nonlinearity With Output Code

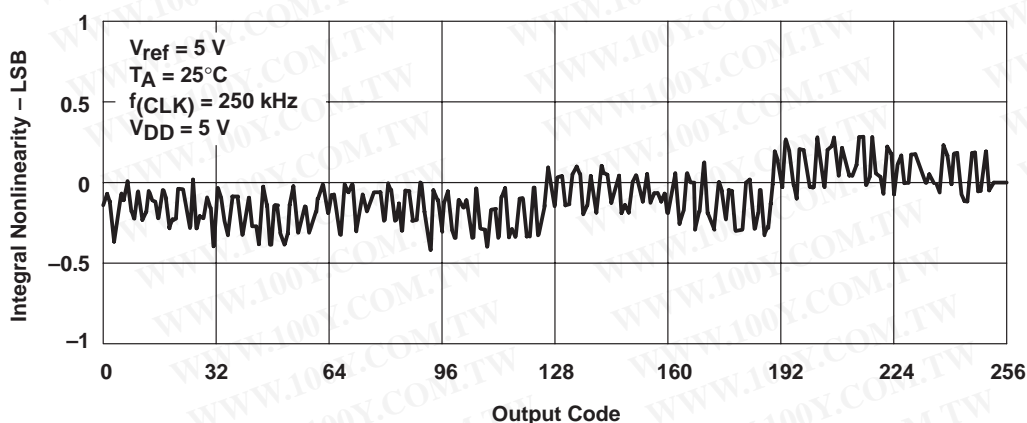


Figure 12. Integral Nonlinearity With Output Code

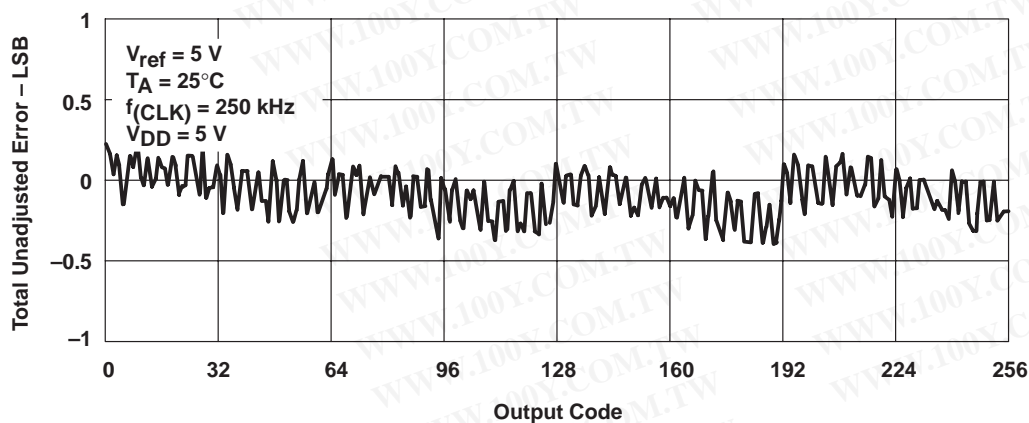


Figure 13. Total Unadjusted Error With Output Code

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.