

TOSHIBA TRANSISTOR SILICON NPN TRIPLE DIFFUSED TYPE

# 2SD633, 2SD635

HIGH POWER SWITCHING APPLICATIONS

INDUSTRIAL APPLICATIONS


HAMMER DRIVE, PULSE MOTOR DRIVE APPLICATIONS

Unit in mm

- High DC Current Gain :  $h_{FE} = 2000$  (Min.)
- Low Saturation Voltage :  $V_{CE(sat)} = 1.5V$  (Max.)
- Complementary to 2SB673 and 2SB675.

MAXIMUM RATINGS ( $T_a = 25^\circ C$ )


CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage	2SD633	$V_{CBO}$	100	V
	2SD635		60	
Collector-Emitter Voltage	2SD633	$V_{CEO}$	100	V
	2SD635		60	
Emitter-Base Voltage		$V_{EBO}$	5	V
Collector Current	$I_C$		7	A
	$I_{CP}$			
Base Current		$I_B$	0.7	A
Collector Power Dissipation ( $T_c = 25^\circ C$ )		$P_C$	40	W
Junction Temperature		$T_j$	150	$^\circ C$
Storage Temperature Range		$T_{stg}$	-55~150	$^\circ C$

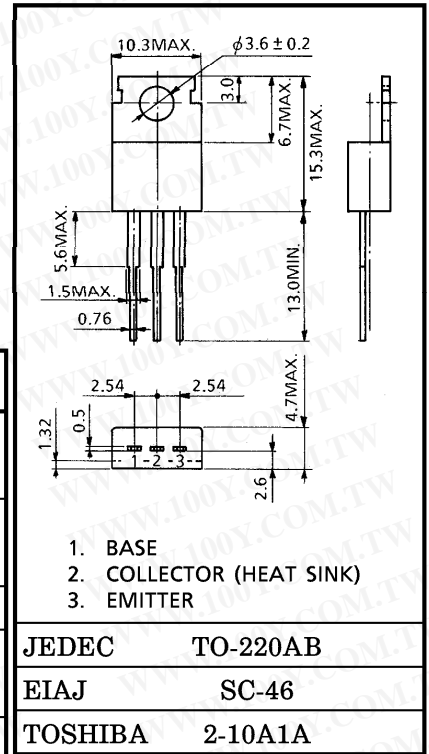

Weight : 1.9g (Typ.)

Mounting kit No. AC75

EQUIVALENT CIRCUIT


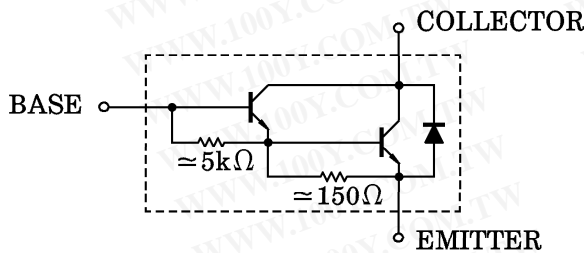


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)







### ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Collector Cut-off Current	2SD633	ICBO	V <sub>CB</sub> = 100V, I <sub>E</sub> = 0	—	—	100	μA	
	2SD635		V <sub>CB</sub> = 60V, I <sub>E</sub> = 0	—	—	100		
Emitter Cut-off Current		I <sub>EBO</sub>	V <sub>EB</sub> = 5V, I <sub>C</sub> = 0	—	—	3.0	mA	
Collector-Emitter Breakdown Voltage	2SD633	V <sub>(BR)</sub> CEO	I <sub>C</sub> = 50mA, I <sub>B</sub> = 0	100	—	—	V	
	2SD635			60	—	—		
DC Current Gain			h <sub>FE</sub> (1)	V <sub>CE</sub> = 3V, I <sub>C</sub> = 3A	2000	—	15000	
			h <sub>FE</sub> (2)	V <sub>CE</sub> = 3V, I <sub>C</sub> = 7A	1000	—	—	
Collector-Emitter Saturation Voltage			V <sub>CE</sub> (sat) (1)	I <sub>C</sub> = 3A, I <sub>B</sub> = 6mA	—	0.9	1.5	V
			V <sub>CE</sub> (sat) (2)	I <sub>C</sub> = 7A, I <sub>B</sub> = 14mA	—	1.2	2.0	
Base-Emitter Saturation Voltage		V <sub>BE</sub> (sat)	I <sub>C</sub> = 3A, I <sub>B</sub> = 6mA	—	1.5	2.5	V	
Switching Time	Turn-on Time	t <sub>on</sub>	<p>20 μs IN-PUT OUTPUT I<sub>B1</sub> I<sub>B2</sub> I<sub>B2</sub> 15Ω V<sub>CC</sub> = 45V</p>	—	0.8	—	μs	
	Storage Time	t <sub>stg</sub>		—	3.0	—		
	Fall Time	t <sub>f</sub>		I <sub>B1</sub> = -I <sub>B2</sub> = 6mA, DUTY CYCLE ≤ 1%	—	2.5		—

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

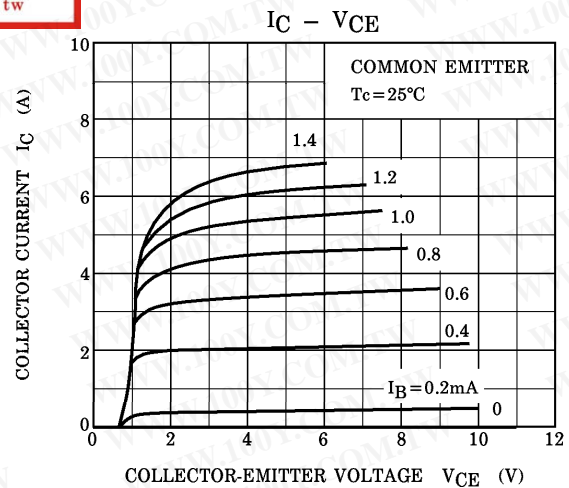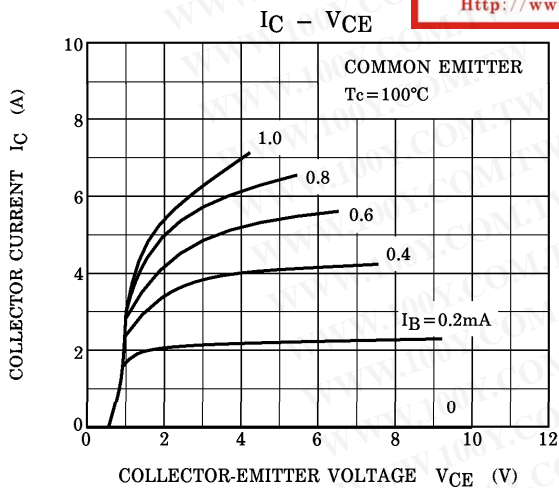

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

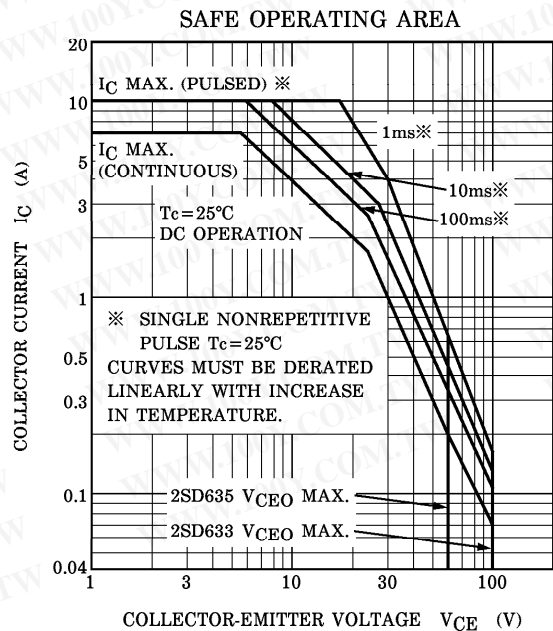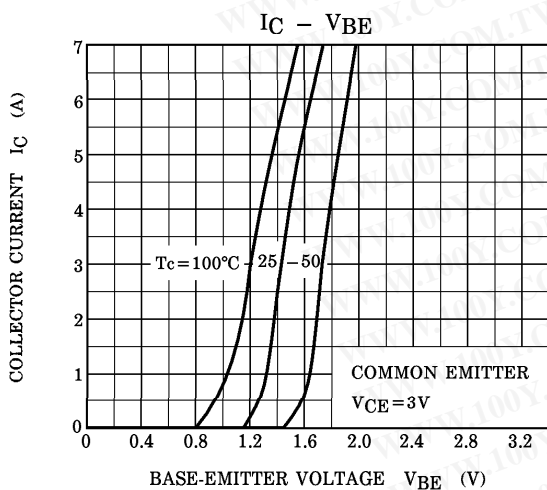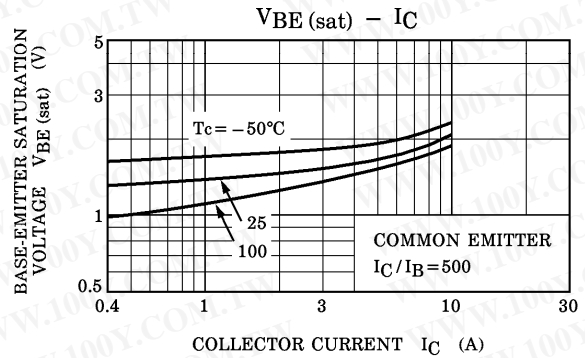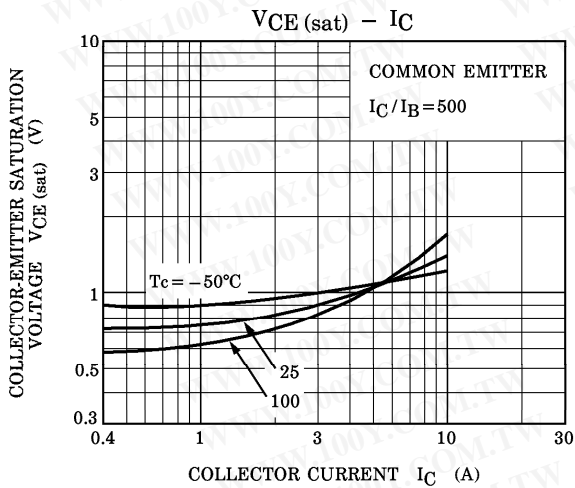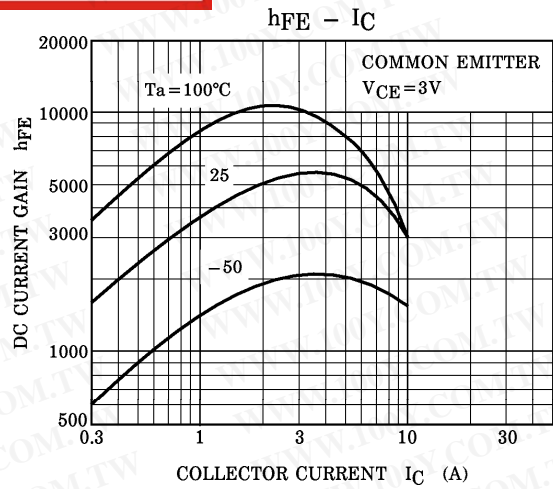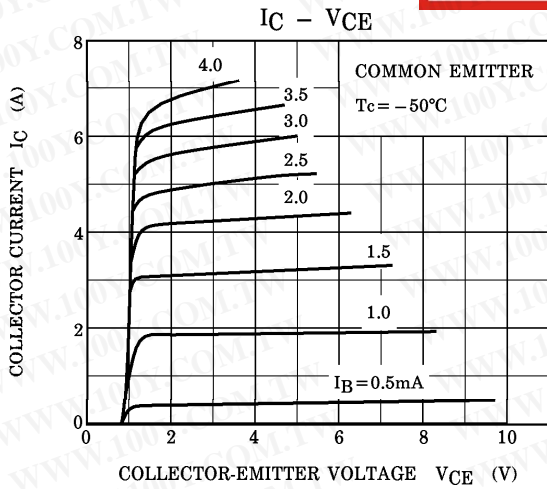

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**RESTRICTIONS ON PRODUCT USE**

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.