

### Description

The  $\mu$ PD71055 is a low-power CMOS programmable parallel interface unit for use in microcomputer systems. Typically, the unit's three I/O ports interface peripheral devices to the system bus.

### Features


- ☐ Three 8-bit I/O ports
- ☐ Three programmable operation modes
- ☐ Bit manipulation command
- ☐ Microcomputer compatible
- ☐ CMOS technology
- ☐ Single +5 V  $\pm 10\%$  power supply
- ☐ Industrial temperature range:  $-40$  to  $+85^\circ\text{C}$
- ☐ 8 MHz and 10 MHz

### Ordering Information


Part Number	Clock (MHz)	Package
$\mu$ PD71055C-8	8	40-pin plastic DIP
C-10	10	
G-8	8	44-pin plastic QFP (P44G-80-22)
GB-8	8	44-pin plastic QFP (P44GB-80-3B4)
GB-10	10	
L-8	8	44-pin PLCC
L-10	10	

### Pin Configurations


#### 40-Pin Plastic DIP

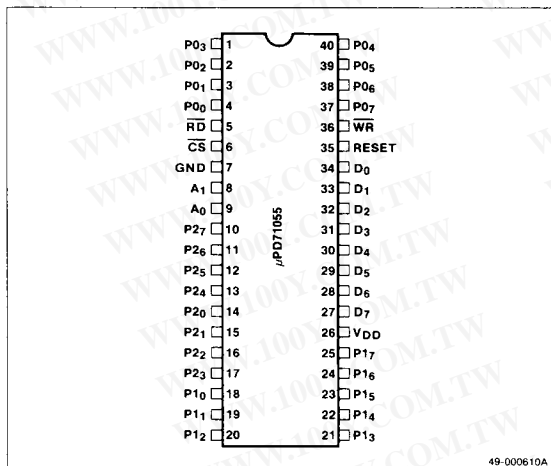

#### 44-Pin Plastic QFP

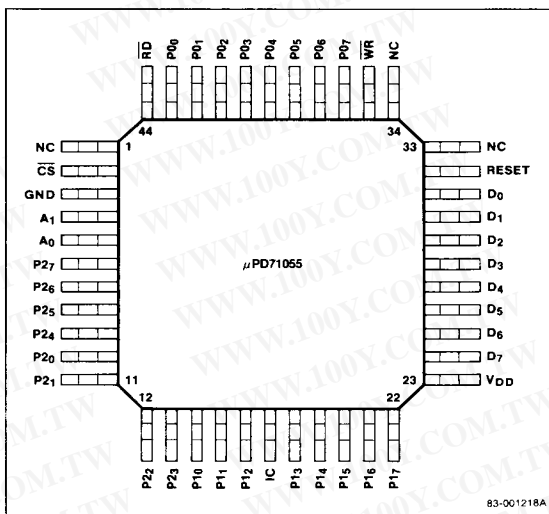

#### 44-Pin Plastic Leaded Chip Carrier (PLCC)

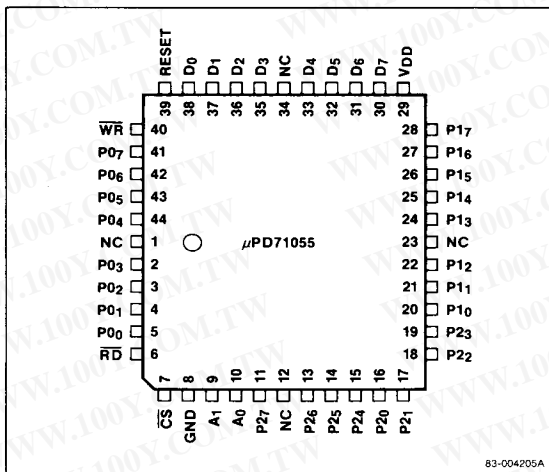

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Pin Identification

Symbol	Function
CS	Chip select input
GND	Ground
A <sub>1</sub> , A <sub>0</sub>	Address inputs 1 and 0
P0 <sub>7</sub> -P0 <sub>0</sub>	I/O port 0, bits 7-0
P1 <sub>7</sub> -P1 <sub>0</sub>	I/O port 1, bits 7-0
P2 <sub>7</sub> -P2 <sub>0</sub>	I/O port 2, bits 7-0
IC	Internally connected
V <sub>DD</sub>	+5 V
D <sub>7</sub> -D <sub>0</sub>	I/O data bus
RESET	Reset input
WR	Write strobe input
RD	Read strobe input
NC	No connection

## Pin Functions

### D<sub>7</sub>-D<sub>0</sub> [Data Bus]

D<sub>7</sub>-D<sub>0</sub> make up an 8-bit, three-state, bidirectional data bus. The bus is connected to the system data bus. It is used to send commands to the μPD71055 and to send data to and from the μPD71055.

### CS [Chip Select]

The CS input is used to select the μPD71055. When CS = 0, the μPD71055 is selected and the states of the D<sub>7</sub>-D<sub>0</sub> pins are determined by the RD and WR inputs. When CS = 1, the μPD71055 is not selected and its data bus is high-impedance.

### RD [Read Strobe]

The RD input is set low when data is being read from the μPD71055 data bus.

### WR [Write Strobe]

The WR input should be set low when data is to be written to the μPD71055 data bus. The contents of the data bus are written to the μPD71055 at the rising edge (low to high) of the WR signal.

### A<sub>1</sub>, A<sub>0</sub> [Address]

The A<sub>1</sub> and A<sub>0</sub> inputs are used in combination with the RD and WR signals to select one of the three ports or the command register. A<sub>1</sub> and A<sub>0</sub> are usually connected to the lower two bits of the system address bus (table 1).

### WR [Write Strobe]

The WR input should be set low when data is to be written to the μPD71055 data bus. The contents of the data bus are written to the μPD71055 at the rising edge (low to high) of the WR signal.

### A<sub>1</sub>, A<sub>0</sub> [Address]

The A<sub>1</sub> and A<sub>0</sub> inputs are used in combination with the RD and WR signals to select one of the three ports or the command register. A<sub>1</sub> and A<sub>0</sub> are usually connected to the lower two bits of the system address bus (table 1).

Table 1. Control Signals and Operation

CS	RD	WR	A <sub>1</sub>	A <sub>0</sub>	Operation	μPD71055 Operation
0	0	1	0	0	Port 0 to data bus	Input
0	0	1	0	1	Port 1 to data bus	Input
0	0	1	1	0	Port 2 to data bus	Input
0	0	1	1	1	Use prohibited	
0	0	0	x	x		
0	1	0	0	0	Data bus to port 0	Output
0	1	0	0	1	Data bus to port 1	Output
0	1	0	1	0	Data bus to port 2	Output
0	1	0	1	1	Data bus to command register	Output
0	1	1	x	x	Data bus high impedance	
1	x	x	x	x		

### RESET [Reset]

When the RESET input is high, the μPD71055 is reset. The group 0 and the group 1 ports are set to mode 0 (basic I/O port mode). All port bits are cleared to zero and all ports are set for input.

### P0<sub>7</sub>-P0<sub>0</sub>, P1<sub>7</sub>-P1<sub>0</sub>, P2<sub>7</sub>-P2<sub>0</sub> [Ports 0, 1, 2]


Pins P0<sub>7</sub>-P0<sub>0</sub>, P1<sub>7</sub>-P1<sub>0</sub>, and P2<sub>7</sub>-P2<sub>0</sub> are the port 0, 1, and 2 I/O pins, bits 7-0, respectively.

### IC [Internally Connected]

Pins marked IC are used internally and must be left unconnected.

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

## Block Diagram

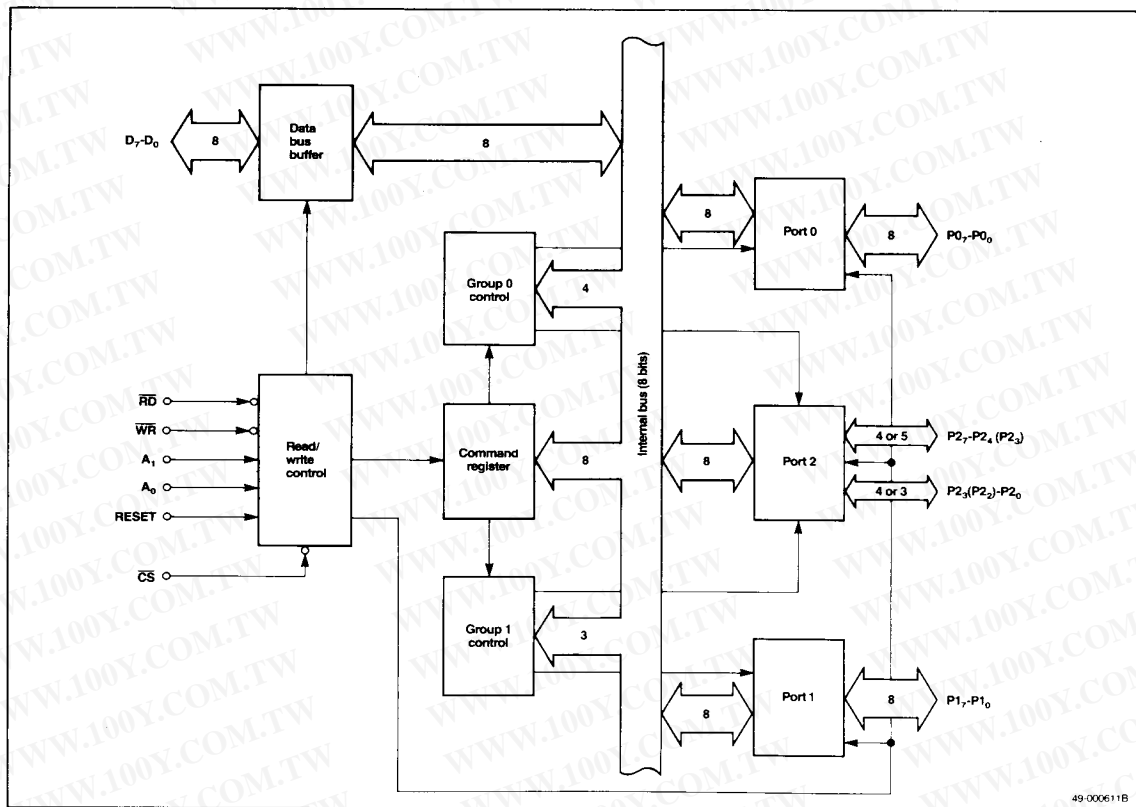

5e

## Functional Description

### Ports 0, 1, 2

The μPD71055 has three 8-bit I/O ports, referred to as port 0, port 1, and port 2. These ports are divided into two groups, group 0 and group 1. The groups can be in one of three modes, mode 0, mode 1, and mode 2. Modes can be set independently for each group.

When port 0 is in mode 0, port 0 and the four upper bits of port 2 belong to group 0, and port 1 and the four lower bits of port 2 belong to group 1. When port 0 is in mode 1 or 2, port 0 and the 5 upper bits of port 2 belong to group 0 and port 1 and the three lower bits of port 2 belong to group 1.

### Command Register

The host writes command words to the μPD71055 in this register. These commands control group 0 and group 1. Note that the contents of this register cannot be read.

### Group 0 Control and Group 1 Control

These blocks control the operation of group 0 and group 1.

### Read/Write Control

The read/write control controls the read/write operations for the ports and the data bus in response to the  $\overline{RD}$ ,  $\overline{WR}$ ,  $\overline{CS}$ , and address signals. It also handles RESET signals and the  $A_0$ ,  $A_1$  address inputs.

### Data Bus Buffer

The data bus buffer latches information going to or from the system data bus.

## Absolute Maximum Ratings

(T<sub>A</sub> = 25°C)

Power supply voltage, V <sub>DD</sub>	-0.5 to +7.0 V
Input voltage, V <sub>I</sub>	-0.5 to V <sub>DD</sub> + 0.3 V
Output voltage, V <sub>O</sub>	-0.5 to V <sub>DD</sub> + 0.3 V
Power dissipation, P <sub>D</sub> MAX	500 mW
Operating temperature, T <sub>opt</sub>	-40 to +85°C
Storage temperature, T <sub>stg</sub>	-65 to +150°C

**Comment:** These devices are not meant to be operated outside the limits specified above. Exposure to stresses beyond those listed in Absolute Maximum Ratings could cause damage. Exposure to an absolute maximum rating for extended periods may affect reliability.

## Capacitance

(T<sub>A</sub> = 25°C, V<sub>DD</sub> = GND = 0 V)

Parameter	Symbol	Limits			Units	Test Conditions
		Min	Typ	Max		
Input capacitance	C <sub>I</sub>		10		pF	f <sub>c</sub> = 1 MHz Unmeasured pins returned to 0 V
I/O capacitance	C <sub>I/O</sub>		20		pF	


勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## DC Characteristics

(T<sub>A</sub> = -40 to +85°C, V<sub>DD</sub> = 5 V ±10%)

Parameter	Symbol	Limits			Units	Test Conditions
		Min	Typ	Max		
Input voltage high	V <sub>IH</sub>	2.2		V <sub>DD</sub> + 0.3	V	
Input voltage low	V <sub>IL</sub>	-0.5		0.8	V	
Output voltage high	V <sub>OH</sub>	0.7 V <sub>DD</sub>			V	I <sub>OH</sub> = -400 μA
Output voltage low	V <sub>OL</sub>			0.4	V	I <sub>OL</sub> = 2.5 mA
Darlington drive current	I <sub>DAR</sub>	-1.0		-4.0	mA	See test setup diagram
Input leakage current high	I <sub>LIH</sub>			10	μA	V <sub>I</sub> = V <sub>DD</sub>
Input leakage current low	I <sub>LIL</sub>			-10	μA	V <sub>I</sub> = 0 V
Output leakage current high	I <sub>LOH</sub>			10	μA	V <sub>O</sub> = V <sub>DD</sub>
Output leakage current low	I <sub>LOL</sub>			-10	μA	V <sub>O</sub> = 0 V
Supply current (dynamic)	I <sub>DD1</sub>			10	mA	Normal operation
Supply current (standby)	I <sub>DD2</sub>			2	μA	Inputs: RESET = 0.1 V, others = V <sub>DD</sub> - 0.1 V Outputs: Open

## Test Setup for I<sub>DAR</sub> Measurement

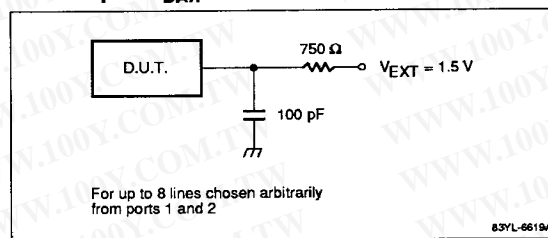



### AC Characteristics

(T<sub>A</sub> = -40 to +85°C, V<sub>DD</sub> = 5 V ±10%)


Parameter	Symbol	8 MHz Limits		10 MHz Limits		Unit	Test Conditions
		Min	Max	Min	Max		
Read Timing							
A <sub>1</sub> , A <sub>0</sub> , CS set-up to $\overline{RD}$ ↓	t <sub>SAR</sub>	0		0		ns	
A <sub>1</sub> , A <sub>0</sub> , CS hold from $\overline{RD}$ ↑	t <sub>HRA</sub>	0		0		ns	
$\overline{RD}$ pulse width	t <sub>RRL</sub>	160		150		ns	
Data delay from $\overline{RD}$ ↓	t <sub>DRD</sub>		120		100	ns	C <sub>L</sub> = 150 pF
Data float from $\overline{RD}$ ↑	t <sub>FRD</sub>	10	85	10	60	ns	C <sub>L</sub> = 20 pF; R <sub>L</sub> = 2 kΩ
Read recovery time	t <sub>RV</sub>	200		150		ns	
Write Timing							
A <sub>1</sub> , A <sub>0</sub> , CS set-up to $\overline{WR}$ ↓	t <sub>SAW</sub>	0		0		ns	
A <sub>1</sub> , A <sub>0</sub> , CS hold from $\overline{WR}$ ↑	t <sub>HWA</sub>	0		0		ns	
$\overline{WR}$ pulse width	t <sub>WWL</sub>	120		100		ns	
Data set-up to $\overline{WR}$ ↑	t <sub>SDW</sub>	100		100		ns	
Data hold from $\overline{WR}$ ↑	t <sub>HWD</sub>	0		0		ns	
Write recovery time	t <sub>RV</sub>	200		150		ns	
Other Timing							
Port set-up time to $\overline{RD}$ ↓	t <sub>SPR</sub>	0		0		ns	
Port hold time from $\overline{RD}$ ↑	t <sub>HRP</sub>	0		0		ns	
Port set-up time to $\overline{STB}$ ↓	t <sub>SPS</sub>	0		0		ns	
Port hold time from $\overline{STB}$ ↑	t <sub>HSP</sub>	150		150		ns	
Port delay time from $\overline{WR}$ ↑	t <sub>DWP</sub>		350		200	ns	C <sub>L</sub> = 150 pF
$\overline{STB}$ pulse width	t <sub>SSL</sub>	350		100		ns	
DAK pulse width	t <sub>DADAL</sub>	300		100		ns	
Port delay time from DAK ↓(mode 2)	t <sub>DDAP</sub>		300		150	ns	C <sub>L</sub> = 150 pF
Port float time from DAK ↑(mode 2)	t <sub>FDAP</sub>	20	250	20	250	ns	C <sub>L</sub> = 20 pF; R <sub>L</sub> = 2 kΩ
OBF set delay from $\overline{WR}$ ↑	t <sub>DWOB</sub>		300		150	ns	C <sub>L</sub> = 150 pF
OBF clear delay from DAK ↓	t <sub>DDA0B</sub>		350		150	ns	
IBF set delay from $\overline{STB}$ ↓	t <sub>DSIB</sub>		300		150	ns	
IBF clear delay from $\overline{RD}$ ↑	t <sub>DRIB</sub>		300		150	ns	
INT set delay from DAK ↑	t <sub>DDAI</sub>		350		150	ns	
INT clear delay from $\overline{WR}$ ↓	t <sub>DWI</sub>		450		200	ns	
INT set delay from $\overline{STB}$ ↑	t <sub>DSI</sub>		300		150	ns	
INT clear delay from $\overline{RD}$ ↓	t <sub>DRI</sub>		400		200	ns	
RESET pulse width	t <sub>RESET1</sub>	50		50		μs	During right after power-on
	t <sub>RESET2</sub>	500		500		ns	During operation

5e


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Timing Waveforms


### AC Test Waveform




### Timing Mode 0: Input

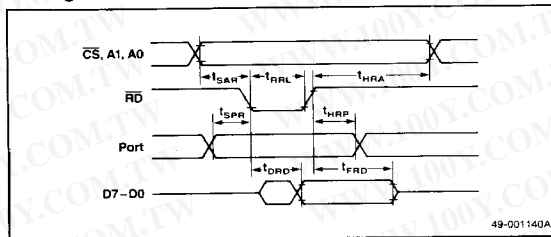


### Mode 0: Output

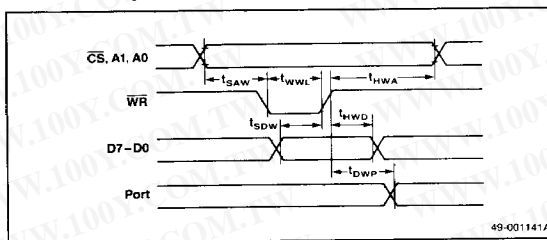


### Recovery Time

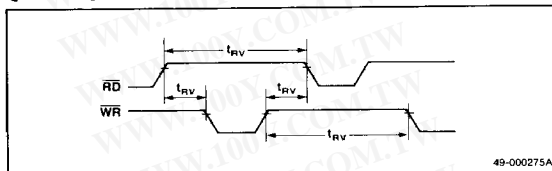

### Mode 1: Input

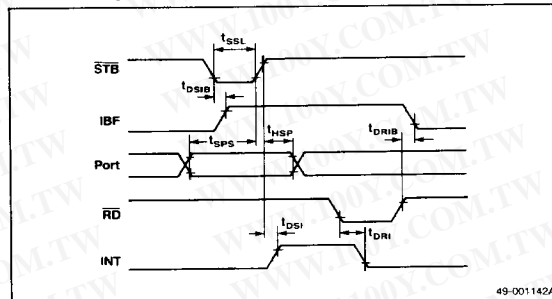


### Mode 1: Output

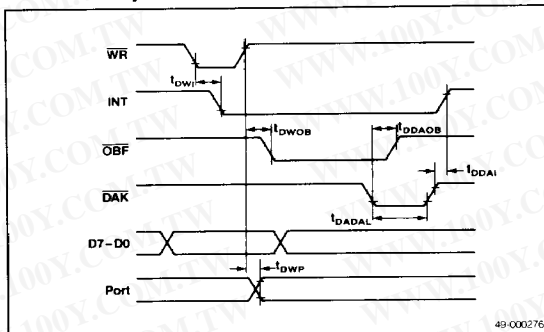

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Timing Waveforms (cont)

#### Mode 2

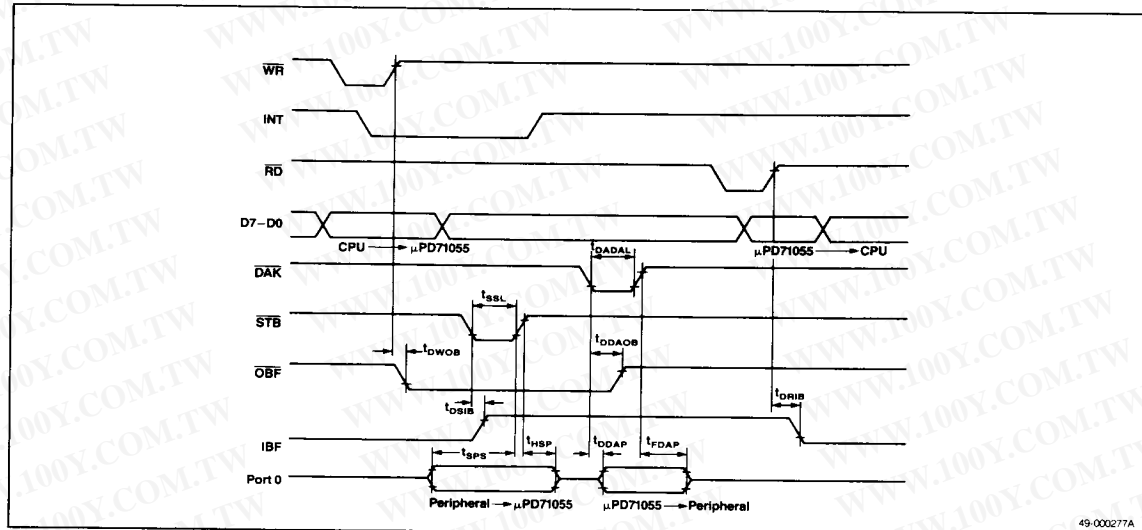

49-000277A

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

5e

## $\mu$ PD71055

### $\mu$ PD71055 Commands

Two commands control  $\mu$ PD71055 operation. The mode select command determines the operation of group 0 and group 1 ports. The bit manipulation command sets or resets the bits of port 2. These commands are executed by writing an 8-bit command word to the command register ( $A_1A_0 = 11$ ).

#### Mode Select

The  $\mu$ PD71055 port groups have three modes. Modes 0 and 1 can be specified for groups 0 and 1, but mode 2 can only be specified for group 0. The bits of all ports are cleared when a mode is selected or when the  $\mu$ PD71055 is reset.

**Mode 0.** Basic input/output port operation.

**Mode 1.** Strobed input/output operation controlled by three or four bits of port 2 used as control/status signals.

**Mode 2.** (Only available for group 0). Port 0 is the bidirectional I/O port and the higher 5 bits of port 2 are used for status and control signals.

To specify the mode, set the command word as shown in figure 1 and write it to the command register.

#### Bit Manipulation Command

This command (figure 2) affects only port 2. It is mainly used in mode 1 and mode 2 to control the port 2 bits which are used as control/status signals. It is also used to enable and disable  $\mu$ PD71055-generated interrupts and to set and reset port 2 general input/output pins.

For example, to set bit 2 of port 2 to 1 ( $P_2 = 1$ ), set the command word as shown in figure 3 (05H) in the command register.

#### Operation in Each Mode

The operation mode for each group in the  $\mu$ PD71055 can be set according to the application. Group 0 can be in modes 0, 1, or 2, while group 1 is in mode 0 or 1. Group 1 cannot be used in mode 2.

The  $\overline{RD}$  and  $\overline{WR}$  signals that appear in the descriptions of each mode refer to the port in question as addressed by  $A_1$  and  $A_0$ . These signals only affect the port addressed by  $A_1$  and  $A_0$ .

Where the port addressed may not be clear, 0 or 1 is appended to the signal name to indicate the port.

#### Mode 0

In this mode the ports of the  $\mu$ PD71055 are used to perform basic I/O operations. Each port operates with a buffered input and a buffered latched output. See figure 4.

Depending on the control word sent to the  $\mu$ PD71055 from the system bus, ports 0, 1, and 2 can be independently specified for input or output.

#### Input Port Operation

While the  $\overline{RD}$  signal is low, data from the port selected by the  $A_1A_0$  signals is put on the data bus. See figure 5.

#### Output Port Operation

When the  $\mu$ PD71055 is written to ( $\overline{WR} = 0$ ), the data on the data bus will be latched in the port selected by the  $A_1A_0$  signals at the rising edge of  $\overline{WR}$  and output to the port pins (figure 6). Following the programming of mode 0, all outputs are at a low level.

By reading a port which is set for output, the output value of the port can be obtained.

Note: When group 0 is in mode 1 or mode 2, only bits  $P_{22}$ - $P_{20}$  of port 2 can be used by group 1. Bit  $P_{23}$  belongs to group 0.

#### Mode 0 Example


This is an example of a CPU connected to an A/D converter via a  $\mu$ PD71055 (figure 7). Here both group 0 and group 1 are set to mode 0 and port 2 is used to start conversion and detect the end of the conversion process.

Figure 8 is a subroutine that reads the converted data from an A/D converter.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)




Figure 1. Mode Select Command Word

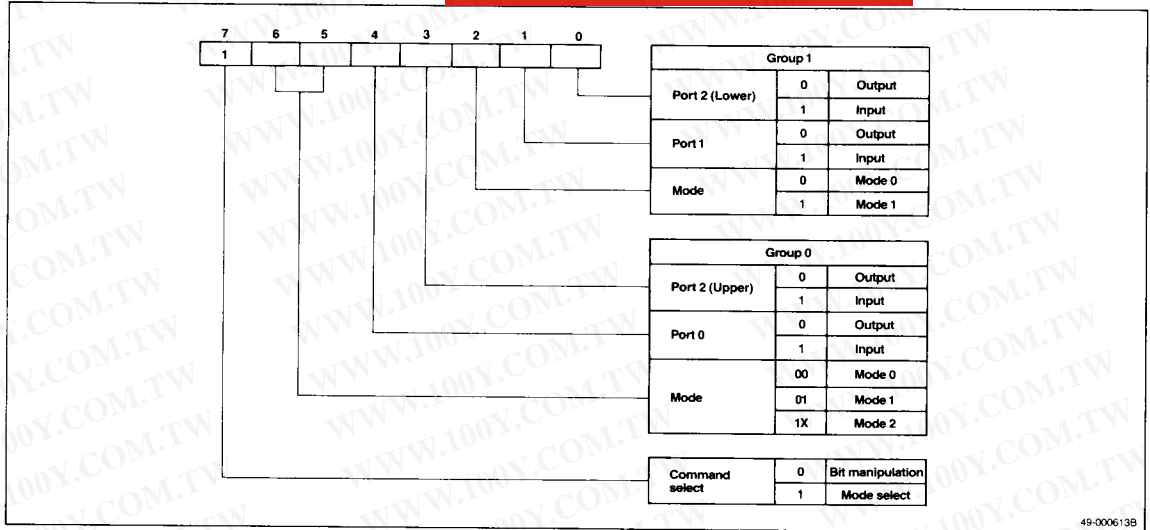


49-000613B

Figure 2. Bit Manipulation Command Word

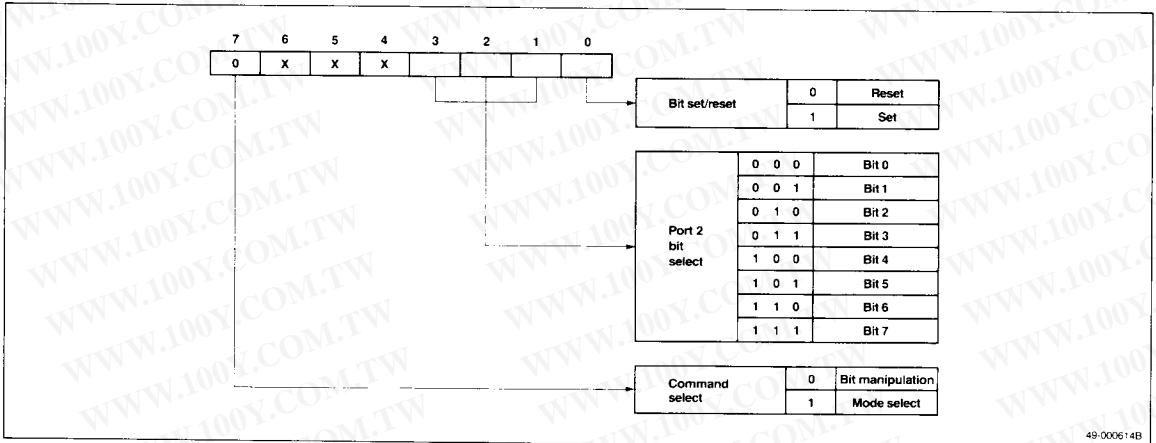

49-000614B

Figure 3. Bit Manipulation Command Example

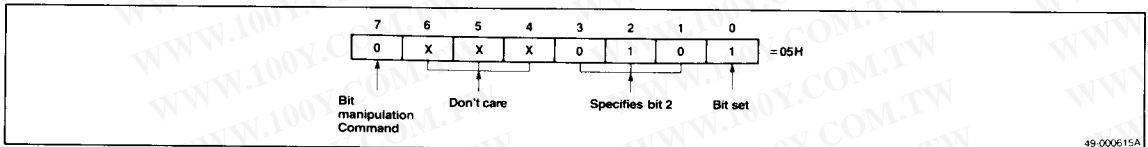

49-000615A

Figure 4. Mode 0

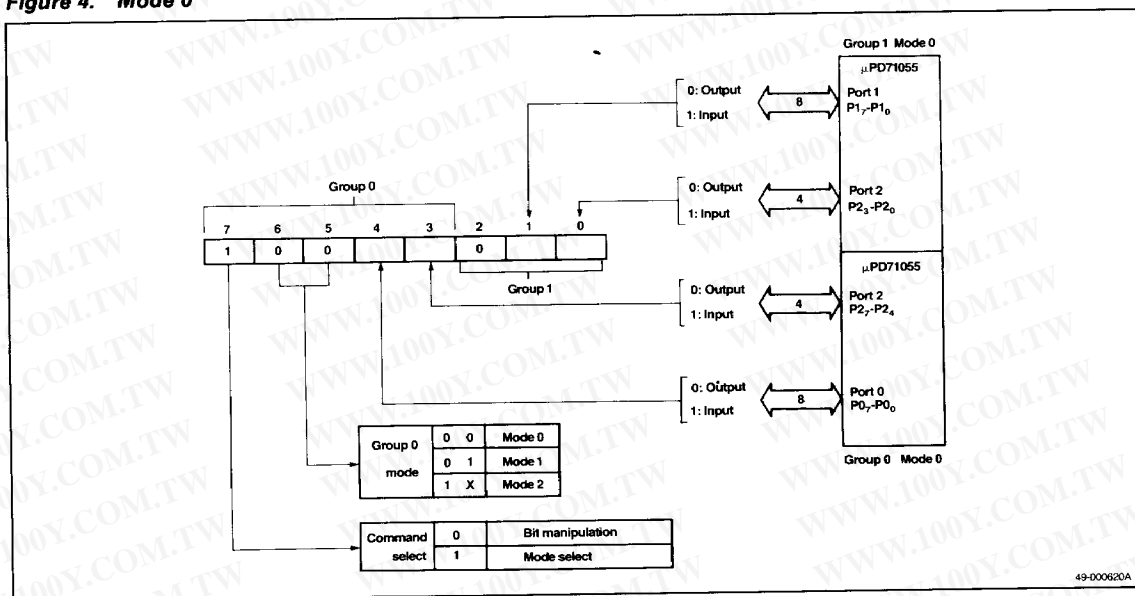


Figure 5. Mode 0 Input Timing


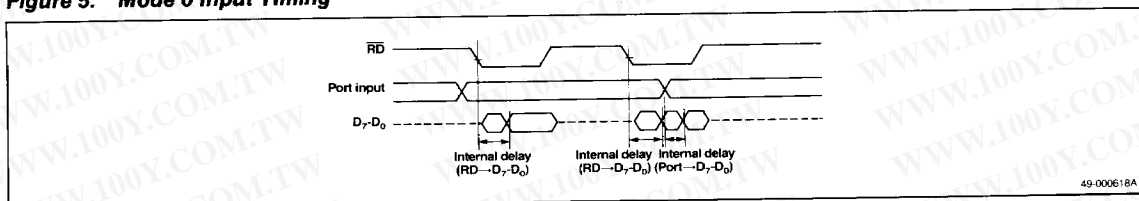


Figure 6. Mode 0 Output Timing

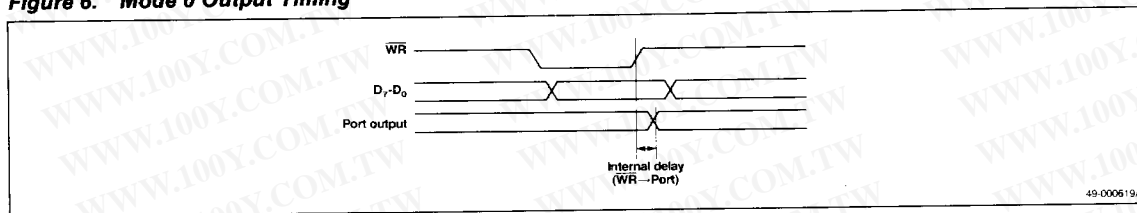

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Figure 7. A/D Converter Connection Example

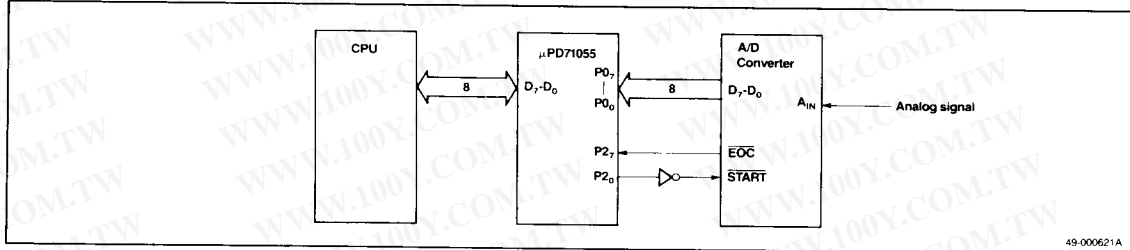


Figure 8. A/D Converter Example

READ_A/D:	MOV	AL,10011000B	μPD71055 Mode Setting:
	OUT	CTRLPORT,AL	;Group 0, group 1 in mode 0
			;Port 0 & port 2 (upper) are inputs
			;Port 1 & port 2 (lower) are outputs
	MOV	AL,00000001B	
	OUT	CTRLPORT,AL	
WAIT_EOC:	IN	AL,PORT2	;Conversion starts by setting P20 high
	TEST1	AL,7	;End of conversion wait loop
	BNZ	WAIT_EOC	;Conversion ends when P27 = 0
	IN	AL,PORT0	
	RET		;Read A/D converted values

5e

### Mode 1

In this mode, the control and status signals control the I/O data. In group 0, port 0 functions as the data port and the upper five bits of port 2 function as control/status. In group 1, port 1 functions as the data port and the lower three bits of port 2 function as control/status.

In mode 1, the bit manipulation command is used to write the bits of port 2.

#### Group 0 Mode 1

When group 0 is used in mode 1, the upper five bits of port 2 become part of group 0. Of these five bits, three are used for control/status and the remaining two can be used for I/O (using the bit manipulation command). See figure 9.

#### Group 1 Mode 1

When group 1 is used in mode 1, the lower three or four bits of port 2 become part of group 1. Of these four bits, three are used for control/status. The remaining bit, P23, can be used for I/O only if group 0 is in mode 0. Otherwise, P23 belongs to group 0 as a control/status bit. See figure 9 and table 4.

### Mode 1 Input Operation

In mode 1, port 0 is the data port for group 0, and port 1 for group 1. The control/status bits (port 2) are used as listed below. Figure 10 shows the signal timing.

**STB [Strobe].** The data input at port 0 is latched in port 0 when the STB0 input is brought low. The data input at port 1 is latched in port 1 by STB1.

**IBF [Input Buffer Full F/F].** The IBF output goes high to indicate that the input buffer has become full. IBF goes high when the STB signal goes low. IBF goes low at the rising edge of the RD signal when STB = 1.

The IBF F/F is cleared when mode 1 is programmed.

**INT [Interrupt Request].** INT goes high when the data is latched in the input port, when RIE is 1 and STB, IBF and RD are all high. INT goes low at the falling edge of the RD signal. It can function as a data read request interrupt signal to a CPU.

INT is cleared when mode 1 is programmed.

Figure 9. Mode 1 Input


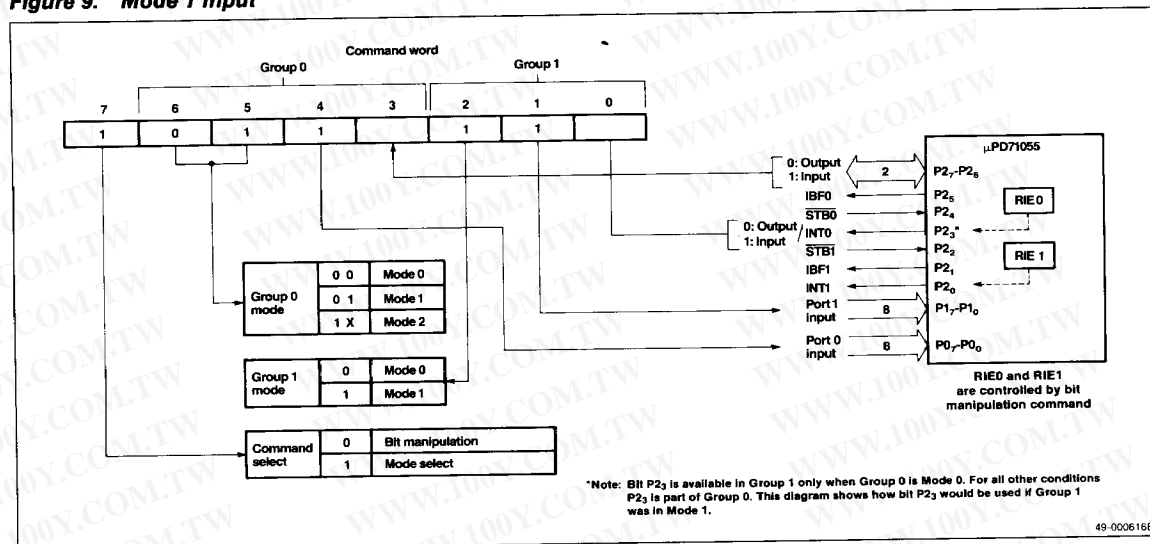


Figure 10. Mode 1 Input Timing

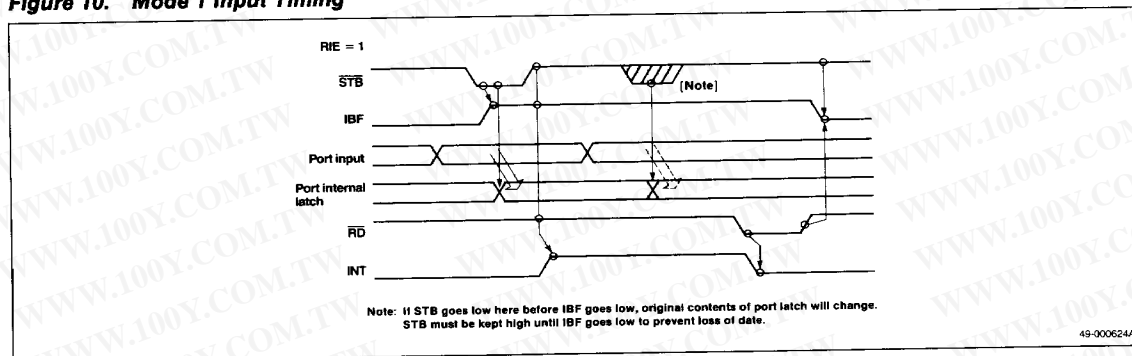

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**RIE [Read Interrupt Enable Flag].** RIE controls the interrupt output. Interrupts can be enabled by using the bit manipulation command to set this bit to 1, and disabled by resetting it to 0. This signal is internal to the μPD71055 and is not an output. The state of RIE does not affect the function of  $\overline{\text{STB0}}$  or  $\overline{\text{STB1}}$ , which are inputs to the same bits ( $\text{P2}_4$  and  $\text{P2}_2$ ) of port 2.


When input is specified in mode 1, the status of IBF, INT and RIE can be read by reading the contents of port 2.

## Mode 1 Output Operation


In mode 1 output operation (figure 11), the status/control bits (port 2) are used as listed below. Figure 12 shows the signal timing.

**OBF [Output Buffer Full F/F].**  $\overline{\text{OBF}}$  goes low when data is received by the μPD71055 and is latched in output ports 1 or 0.  $\overline{\text{OBF}}$  functions as a data receive flag.  $\overline{\text{OBF}}$  goes low at the rising edge of  $\overline{\text{WR}}$  when  $\overline{\text{DAK}} = 1$  (write complete). It goes high when the  $\overline{\text{DAK}}$  signal goes low.

**Figure 11. Mode 1 Output**

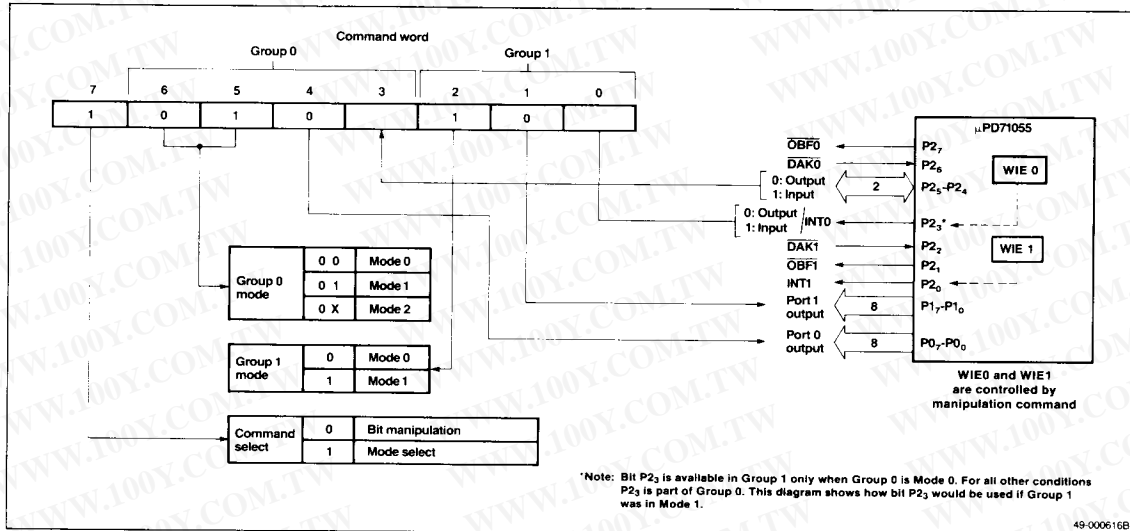

**Figure 12. Mode 1 Output Timing**

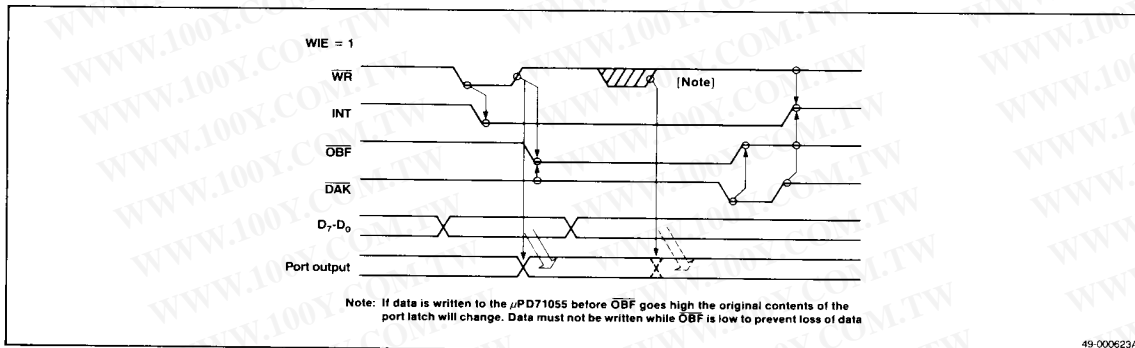

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



**DAK [Data Acknowledge].** When this input is low, it signals the μPD71055 that output port data has been taken from the 71055.

**INT [Interrupt Request].** INT goes high when the output data is taken when WIE is set to 1 and  $\overline{WR}$ ,  $\overline{OBF}$  and  $\overline{DAK}$  are all high. It goes low at the falling edge of the  $\overline{WR}$  signal. INT therefore functions as a write request signal, indicating that new data should be sent to the μPD71055.

**WIE [Write Interrupt Enable Flag].** WIE controls the interrupt output. Interrupts can be enabled by using the bit manipulation command to set this bit to 1 and disabled by resetting it to 0. This signal is internal to the μPD71055 and is not an output. The state of WIE does not affect the function of  $\overline{DAK}$  addressed to the same bits of port 2.

When output is specified in mode 1, the status of  $\overline{OBF}$ , INT and WIE can be obtained by reading the contents of port 2.

Table 2 shows a summary of these signals.

**Table 2. Functions of Port 2 Bits in Mode 1**


Group	Bit	Data Input	Data Output
1	P2 <sub>0</sub>	INT1 (Interrupt request)	INT1 (Interrupt request)
	P2 <sub>1</sub>	IBF1 (Input buffer full f/f)	OBF1 (Output buffer full f/f)
	P2 <sub>2</sub>	STB1 (Strobe input)	DAK1 (Data acknowledge input)
		RIE1 (Read interrupt enable flag)	WIE1 (Write interrupt enable flag)
	P2 <sub>3</sub>	I/O (Note)	I/O (Note)
0	P2 <sub>3</sub>	INT0 (Interrupt request)	INT0 (Interrupt request)
	P2 <sub>4</sub>	STB0 (Strobe input)	I/O
		RIE0 (Read interrupt enable flag)	
	P2 <sub>5</sub>	IBF0 (Input buffer full f/f)	I/O
	P2 <sub>6</sub>	I/O	DAK0 (Data acknowledge input)
			WIE0 (Write interrupt enable flag)
	P2 <sub>7</sub>	I/O	OBF0 (Output buffer full f/f)

**Note:** Can be used with group 1 only when group 0 is set to mode 0. In other modes, P2<sub>3</sub> belongs to group 0.

### Mode 1 Example

This example (figure 13) demonstrates connecting a printer to the μPD71055. Group 0 is used in mode 1 output. Group 1 can operate in mode 0 or 1; in this example it is set to mode 0.

**Figure 13. Connection to Printer**

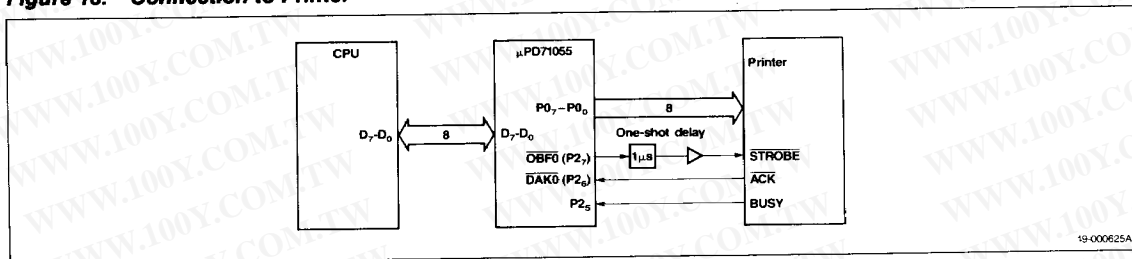

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**Figure 14. Printer Example Subroutine**

;This subroutine sends character strings to the printer			
INIT:	MOV	AL,10101000B	μPD71055 Mode Setting:
			;Group 0: mode 1 output
			;Group 1: mode 0
	OUT	CTRLPORT,AL	
	RET		
SENDPRN:	MOV	BW,DATA	;Output data address
PRNLOOP:	MOV	AL,[BW]	
	CMP	AL,0FFH	;End if data = 0FFH
	BNZ	WAIT	
	RET		
WAIT:	IN	AL,PORT2	
	TEST1	AL,7	;Wait until output buffer is empty
	BZ	WAIT	
	TEST1	AL,5	;Wait until printer can accept data
	BNZ	WAIT	
	MOV	AL,[BW]	;Send data to printer
	OUT	PORT0,AL	
	INC	BW	
	BR	PRNLOOP	

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Mode 2

Mode 2 can only be used by group 0. In this mode, port 0 functions as a bidirectional 8-bit data port operating under the control of the upper five bits of port 2 as control/status signals. In this mode, port 0 combines the input and output operations of mode 1. See figures 15 and 16.

In mode 2, the status of the following signals can be determined by reading port 2:  $\overline{OBF0}$ ,  $\overline{IBF0}$ ,  $\overline{INT0}$ ,  $\overline{WIE0}$ , and  $\overline{RIE0}$ .

The  $\overline{DAK0}$  and  $\overline{STB0}$  signals are used to select input or output for port 0. By using these signals, bidirectional operation between the μPD71055 and peripheral can be realized.

In mode 2, the bit manipulation command is used to write to port 2.

## Control/Status Port Operation

The following control/status signals are used for output:

**$\overline{OBF0}$  [Output Buffer Full].**  $\overline{OBF0}$  goes low when data is received from the  $D_0$ - $D_7$  data bus and is latched in the port 0 output buffer. It therefore functions as a receive request signal to the peripheral.  $\overline{OBF0}$  goes low

at the rising edge of the  $\overline{WR0}$  signal (end of data write). It goes high when  $\overline{DAK0}$  is low (output data from port 0 received).

**$\overline{DAK0}$  [Data Acknowledge].**  $\overline{DAK0}$  is sent to the μPD71055 in response to the  $\overline{OBF0}$  signal. It should be set low when data is received from port 0 of the μPD71055.

**$\overline{WIE0}$  [Write Interrupt Enable Flag].**  $\overline{WIE0}$  controls the write interrupt request output. Interrupts are enabled by using the bit manipulation command to set this bit to 1 and disabled by setting it to 0. The state of  $\overline{WIE0}$  does not affect the  $\overline{DAK}$  function of this pin.

The following control/status signals are used for input:

**$\overline{STB0}$  [Strobe Input].** When  $\overline{STB0}$  goes low, the data being sent to the μPD71055 is latched in port 0.

**$\overline{IBF0}$  [Input Buffer Full F/F].** When  $\overline{IBF0}$  goes high, it indicates that the input buffer is full. It functions as a signal which can be used to prohibit further data transfer.  $\overline{IBF0}$  goes high when  $\overline{STB0}$  goes low. It goes low at the rising edge of  $\overline{RD0}$  when  $\overline{STB0} = 1$  (read complete).

5e

Figure 15. Mode 2


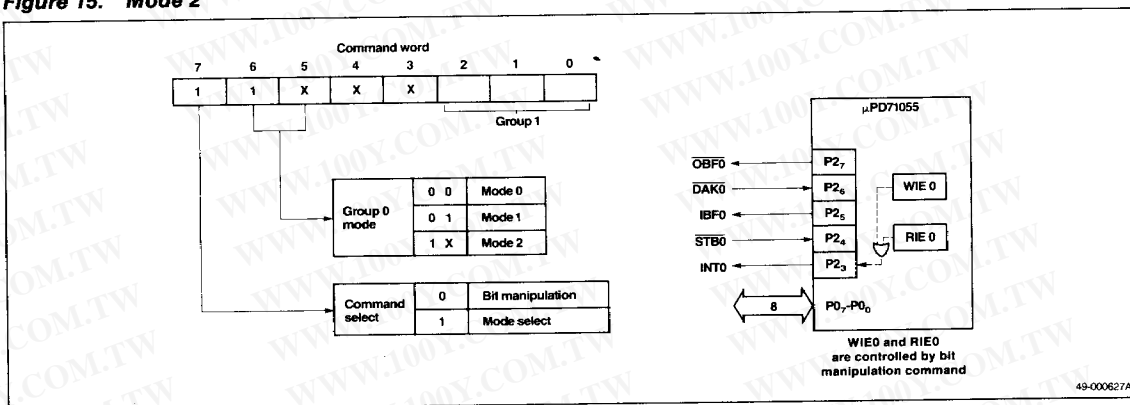


Figure 16. Mode 2 Timing

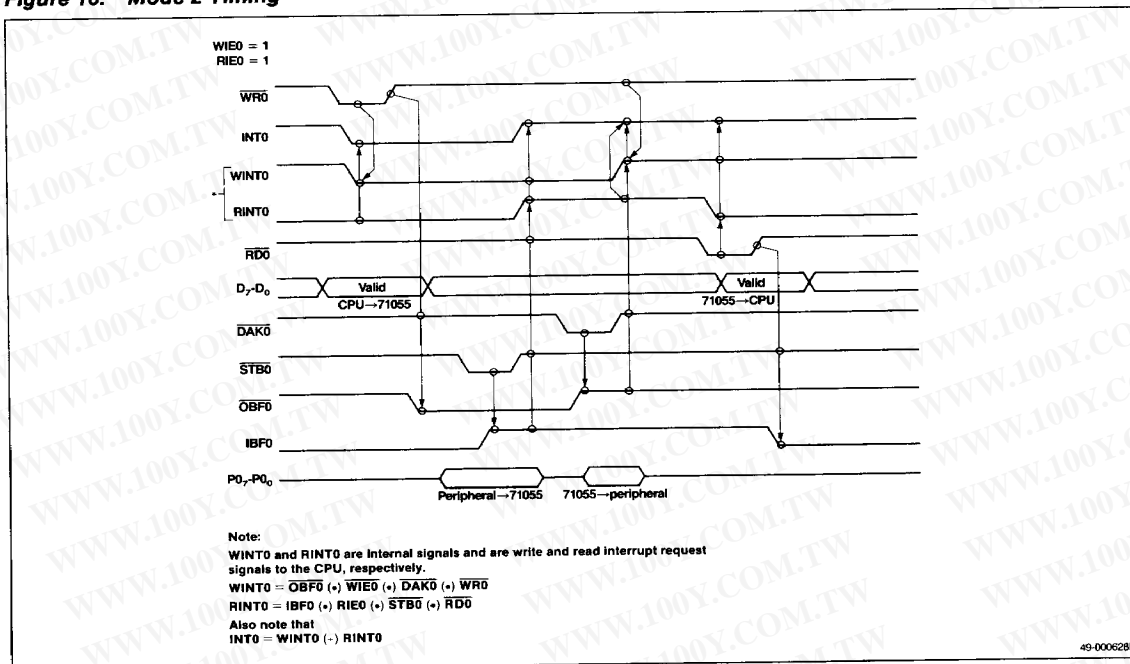

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**RIE0 [Read Interrupt Enable Flag].** RIE0 controls the read interrupt request output. Interrupts are enabled by using the bit manipulation command to set this bit to 1 and disabled by setting it to 0. The state of RIE0 does not affect the STB0 function of this pin.

This control/status signal is used for both input and output:

**INT0 [Interrupt Request].** During input operations, INT0 functions as a read request interrupt signal. During output, it functions as a write request interrupt signal. This signal is the logical OR of the INT signal for data read (RINT0) and the INT signal for write (WINT0) in mode 1 (RINT0 OR WINT0).

In mode 2, the status of  $\overline{\text{OBF0}}$ , IBF0, INT0, WIE0, and RIE0 can be determined by reading port 2.

Table 3 is a summary of these signals.


**Table 3. Functions of Port 2 in Mode 2**

Bit	Function
P2 <sub>3</sub>	INT0 (Interrupt request)
P2 <sub>4</sub>	STB0 (Strobe input) RIE0 (Read interrupt enable flag)
P2 <sub>5</sub>	IBF0 (Input buffer full f/f)
P2 <sub>6</sub>	DAK0 (Data acknowledge input) WIE0 (Write interrupt enable flag)
P2 <sub>7</sub>	$\overline{\text{OBF0}}$ (Output buffer full f/f)

### Mode 2 Example

Figures 17, 18, and 19 show data transfer between two CPUs.


**Figure 17. Connecting Two CPUs**

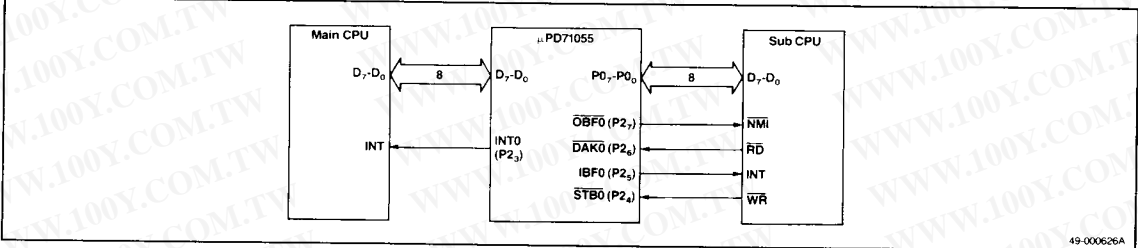

5e

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


Figure 18. Main CPU Flowchart

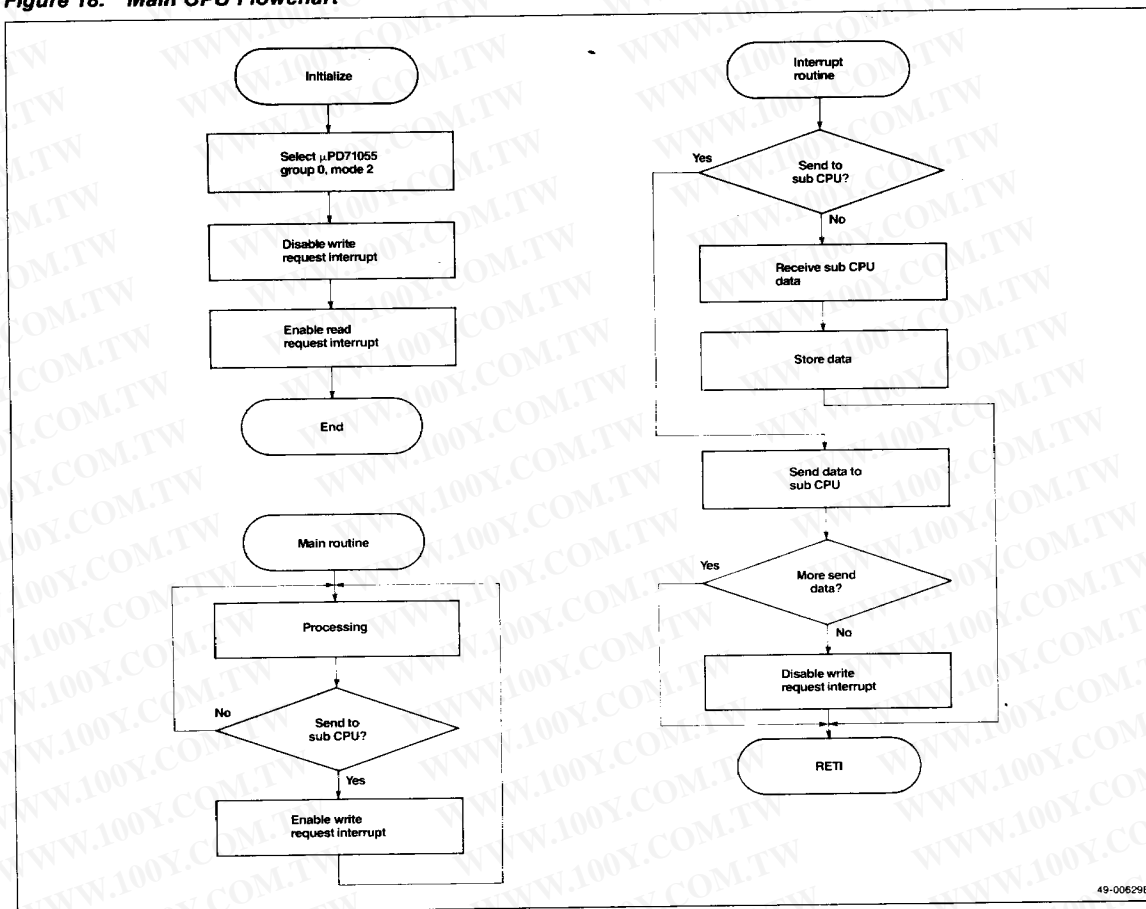

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



Figure 19. Sub CPU Flowchart

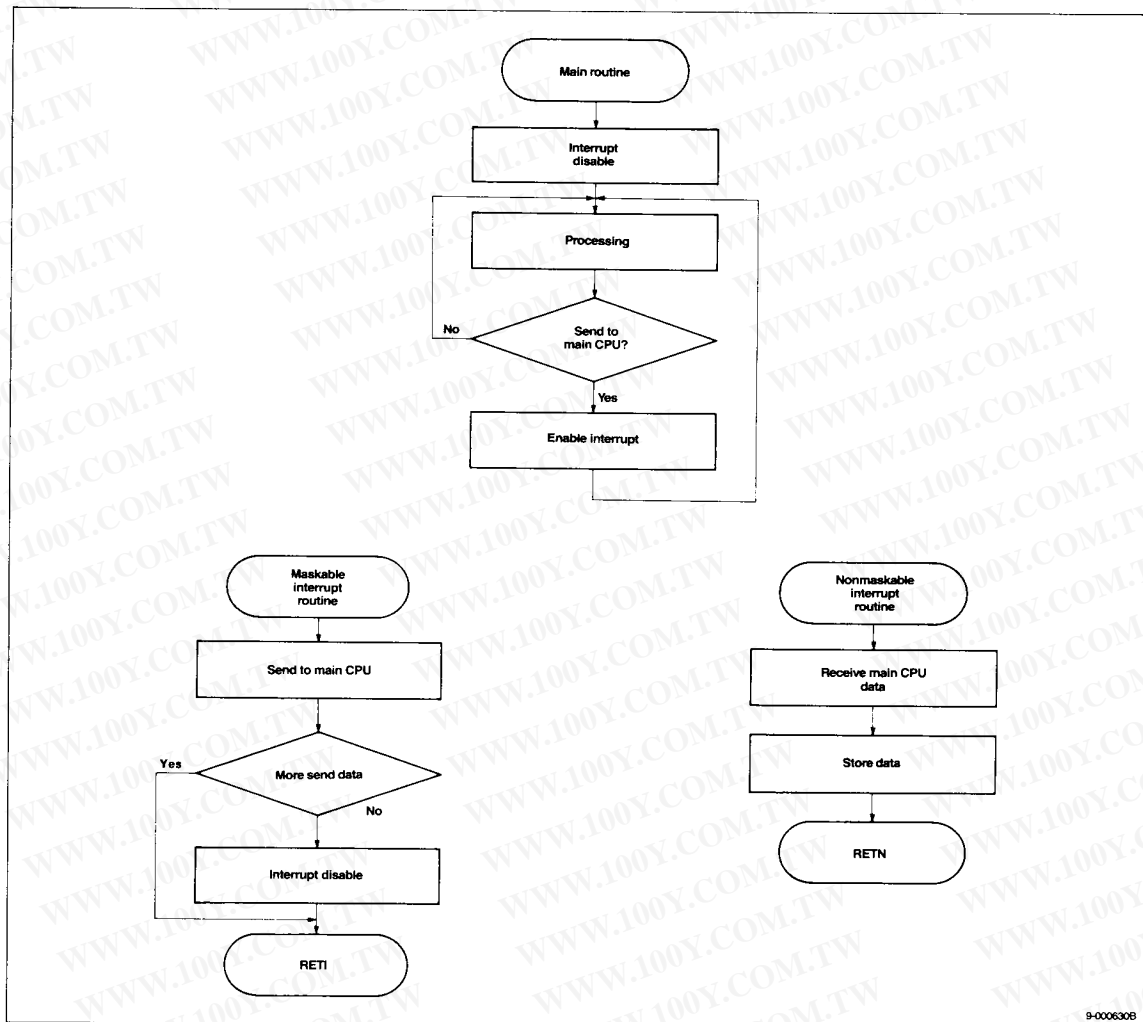

5e

9-0006308

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

勝 特 力 材 料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Mode Combinations

Table 4 is a complete list of all the combinations of modes and groups, and the function of the port 2 bits in each mode.

**Table 4. Mode Combinations and Port 2 Bit Functions**

Group 0							Group 1					
Mode	P0 <sub>7</sub> -P0 <sub>0</sub>	P2 <sub>7</sub>	P2 <sub>6</sub>	P2 <sub>5</sub>	P2 <sub>4</sub>	P2 <sub>3</sub>	Mode	P1 <sub>7</sub> -P1 <sub>0</sub>	P2 <sub>3</sub>	P2 <sub>2</sub>	P2 <sub>1</sub>	P2 <sub>0</sub>
0	In	D	D	D	D	NA	0	In	D	D	D	D
0	In	D	D	D	D	NA	0	Out	D	D	D	D
0	In	D	D	D	D	NA	1	In	B	STB1 (RIE1)	IBF1	INT1
0	In	D	D	D	D	NA	1	Out	B	DAK1 (WIE1)	OB $\overline{\text{F}}$ 1	INT1
0	Out	D	D	D	D	NA	0	In	D	D	D	D
0	Out	D	D	D	D	NA	0	Out	D	D	D	D
0	Out	D	D	D	D	NA	1	In	B	STB1 (RIE1)	IBF1	INT1
0	Out	D	D	D	D	NA	1	Out	B	DAK1 (WIE1)	OB $\overline{\text{F}}$ 1	INT1
1	In	B	B	IBF0	STB0 (RIE0)	INT0	0	In	NA	D	D	D
1	In	B	B	IBF0	STB0 (RIE0)	INT0	0	Out	NA	D	D	D
1	In	B	B	IBF0	STB0 (RIE0)	INT0	1	In	NA	STB1 (RIE1)	IBF1	INT1
1	In	B	B	IBF0	STB0 (RIE0)	INT0	1	Out	NA	DAK1 (WIE1)	OB $\overline{\text{F}}$ 1	INT1
1	Out	OB $\overline{\text{F}}$ 0	DAK0 (WIE0)	B	B	INT0	0	In	NA	D	D	D
1	Out	OB $\overline{\text{F}}$ 0	DAK0 (WIE0)	B	B	INT0	0	Out	NA	D	D	D
1	Out	OB $\overline{\text{F}}$ 0	DAK0 (WIE0)	B	B	INT0	1	In	NA	STB1 (RIE1)	IBF1	INT1
1	Out	OB $\overline{\text{F}}$ 0	DAK0 (WIE0)	B	B	INT0	1	Out	NA	DAK1 (WIE1)	OB $\overline{\text{F}}$ 1	INT1
2	I/O	OB $\overline{\text{F}}$ 0	DAK0 (WIE0)	IBF0	STB0 (RIE0)	INT0	0	In	NA	D	D	D
2	I/O	OB $\overline{\text{F}}$ 0	DAK0 (WIE0)	IBF0	STB0 (RIE0)	INT0	0	Out	NA	D	D	D
2	I/O	OB $\overline{\text{F}}$ 0	DAK0 (WIE0)	IBF0	STB0 (RIE0)	INT0	1	In	NA	STB1 (RIE1)	IBF1	INT1
2	I/O	OB $\overline{\text{F}}$ 0	DAK0 (WIE0)	IBF0	STB0 (RIE0)	INT0	1	Out	NA	DAK1 (WIE1)	OB $\overline{\text{F}}$ 1	INT1

### Note:

- (1) In this chart, "NA" indicates that the bit cannot be used by this group.
- (2) The symbol "B" indicates bits that can only be rewritten by the bit manipulation command.
- (3) In this chart, "D" indicates that is used by the user.
- (4) Symbols in parentheses are internal flags. They are not output to port 2 pins and they cannot be read by the host.
- (5) In indicates Input, Out indicates Output, and I/O indicates Input/Output.