




INDUCTORS & SUPPRESSORS & FILTERS



PartNo.	ProductNo.	Manuf.	Description	電感值 (uH)	誤差值 (%)	Qmin.	SRF(MHz)min	RDC	IDC(mA)max	Size
13551	JW10603C-10NJ	JANTEK	高頻繞線晶片電感器	10@100MHz	5	30	2800	0.32	400	1.6*0.8mm
13552	JW10603C-12NJ	JANTEK	高頻繞線晶片電感器	12@100MHz	5	30	2800	0.35	400	1.6*0.8mm
13553	JW10603C-15NJ	JANTEK	高頻繞線晶片電感器	15@100MHz	5	30	2500	0.41	350	1.6*0.8mm
13554	JW10603C-22NJ	JANTEK	高頻繞線晶片電感器	22@100MHz	5	30	2000	0.5	300	1.6*0.8mm
13555	JW10603C-33NJ	JANTEK	高頻繞線晶片電感器	33@100MHz	5	30	1800	0.6	300	1.6*0.8mm
13556	JW10603C-47NJ	JANTEK	高頻繞線晶片電感器	47@100MHz	5	30	1800	0.95	250	1.6*0.8mm
13550	JW10603C-5N6J	JANTEK	高頻繞線晶片電感器	5.6@100MHz	5	30	4600	0.18	430	1.6*0.8mm
13557	JW10603C-68NJ	JANTEK	高頻繞線晶片電感器	68@100MHz	5	30	1500	1.3	250	1.6*0.8mm
13683	JW10603C-R10J	JANTEK	高頻繞線晶片電感器	100@100MHz	5	30	1300	1.8	200	1.6*0.8mm
13566	JW10805C-10NJ	JANTEK	高頻繞線晶片電感器	10@100MHz	5	60@500MHz	4800	0.06	600	2*1.25mm
13565	JW10805C-22NJ	JANTEK	高頻繞線晶片電感器	22@100MHz	5	60@500MHz	3300	0.1	500	2*1.25mm
13564	JW10805C-33NJ	JANTEK	高頻繞線晶片電感器	33@100MHz	5	60@500MHz	2400	0.15	500	2*1.25mm
13563	JW10805C-47NJ	JANTEK	高頻繞線晶片電感器	47@100MHz	5	60@500MHz	1700	0.2	500	2*1.25mm
13567	JW10805C-4N7J	JANTEK	高頻繞線晶片電感器	4.7@100MHz	5	60@1000MHz	6000	0.06	600	2*1.25mm
13506	JW10805C-68NJ	JANTEK	高頻繞線晶片電感器	68@100MHz	5	60@500MHz	1450	0.35	500	2*1.25mm
13558	JW10805C-R10J	JANTEK	高頻繞線晶片電感器	100@100MHz	5	60@500MHz	1200	0.5	500	2*1.25mm
13562	JW10805C-R12J	JANTEK	高頻繞線晶片電感器	120@25MHz	5	50@250MHz	1100	0.6	400	2*1.25mm
13561	JW10805C-R15J	JANTEK	高頻繞線晶片電感器	150@25MHz	5	50@250MHz	950	0.85	400	2*1.25mm
13560	JW10805C-R18J	JANTEK	高頻繞線晶片電感器	180@25MHz	5	50@250MHz	900	1.00	400	2*1.25mm
13559	JW10805C-R22J	JANTEK	高頻繞線晶片電感器	220@25MHz	5	50@250MHz	860	1.2	400	2*1.25mm

SMD 大電流線圈電感 SMD Power Coils

詳細產品規格--請點擊www.100y.com.tw

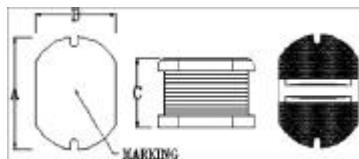

Applications
 PDAs flash memory
 Step-up, step-down converters
 Communication
 Digital camera

Features
 Very thin & compact
 With large permissible D.C. current & low D.C. resistance

PartNo.	ProductNo.	Manuf.	Description	電感值(nH)@MHz	誤差值 (%)	IDCmax. (mA)	Size
21802	JPT1004-561K	JANTEK	SMD POWER COILS	560µH	±10%	0.32	10*9*4
21805	JPT1005-102K	JANTEK	SMD POWER COILS	1000µH	±10%	0.22	10*9*5.4
21803	JPT1005-681K	JANTEK	SMD POWER COILS	680µH	±10%	0.28	10*9*5.4
21798	JTP0403-100K	JANTEK	SMD POWER COILS	10µH	±10%	1.04	4.5*4.0*3.2
21799	JTP0403-120K	JANTEK	SMD POWER COILS	12µH	±10%	0.97	4.5*4.0*3.2
21800	JTP0403-150K	JANTEK	SMD POWER COILS	15µH	±10%	0.85	4.5*4.0*3.2
21790	JTP0403-1R0	JANTEK	SMD POWER COILS	1.0µH	±20%	2.56	4.5*4.0*3.2
21791	JTP0403-2R2	JANTEK	SMD POWER COILS	2.2µH	±20%	1.75	4.5*4.0*3.2
21792	JTP0403-2R7	JANTEK	SMD POWER COILS	2.7µH	±20%	1.58	4.5*4.0*3.2
21793	JTP0403-3R3	JANTEK	SMD POWER COILS	3.3µH	±20%	1.44	4.5*4.0*3.2
21794	JTP0403-4R7	JANTEK	SMD POWER COILS	4.7µH	±20%	1.15	4.5*4.0*3.2
21795	JTP0403-5R6	JANTEK	SMD POWER COILS	5.6µH	±20%	0.99	4.5*4.0*3.2
21796	JTP0403-6R8	JANTEK	SMD POWER COILS	6.8µH	±20%	0.95	4.5*4.0*3.2
21797	JTP0403-8R2	JANTEK	SMD POWER COILS	8.2µH	±20%	0.84	4.5*4.0*3.2
22098	JTP0504-101K	JANTEK	SMD POWER COILS	100µH	±10%	0.52	5.8*5.2*4.5
22099	JTP0504-121K	JANTEK	SMD POWER COILS	120µH	±10%	0.48	5.8*5.2*4.5
22100	JTP0504-151K	JANTEK	SMD POWER COILS	150µH	±10%	0.4	5.8*5.2*4.5
22101	JTP0504-220K	JANTEK	SMD POWER COILS	22µH	±10%	1.11	5.8*5.2*4.5
22102	JTP0504-221K	JANTEK	SMD POWER COILS	220µH	±10%	0.38	5.8*5.2*4.5
22103	JTP0504-270K	JANTEK	SMD POWER COILS	27µH	±10%	0.97	5.8*5.2*4.5
22104	JTP0504-330K	JANTEK	SMD POWER COILS	33µH	±10%	0.88	5.8*5.2*4.5
22105	JTP0504-470K	JANTEK	SMD POWER COILS	47µH	±10%	0.72	5.8*5.2*4.5
22107	JTP0504-560K	JANTEK	SMD POWER COILS	56µH	±10%	0.68	5.8*5.2*4.5
22106	JTP0504-680K	JANTEK	SMD POWER COILS	68µH	±10%	0.61	5.8*5.2*4.5
22108	JTP0703-271K	JANTEK	SMD POWER COILS	270µH	±10%	0.29	7.8*7*3.5
22109	JTP0703-331K	JANTEK	SMD POWER COILS	330µH	±10%	0.28	7.8*7*3.5
21801	JTP0705-471K	JANTEK	SMD POWER COILS	470µH	±10%	0.34	7.8*7*5

