


High Operating Temperature Poly-carbonmonofluoride Lithium Coin Batteries (BR "A" Series): Individual Specifications

BR1225A

■ Dimensions(mm)




Weight: 0.8g

Note: This bare cell diagram is for size reference only. Please refer to the tab configurations at the end of this section for available tabs.

■ Specification


Nominal voltage (V)	3
Nominal capacity (mAh)	48
Continuous standard load (mA)	0.03
Operating temperature (C)	-40 ~ +125

■ Temperature Characteristics

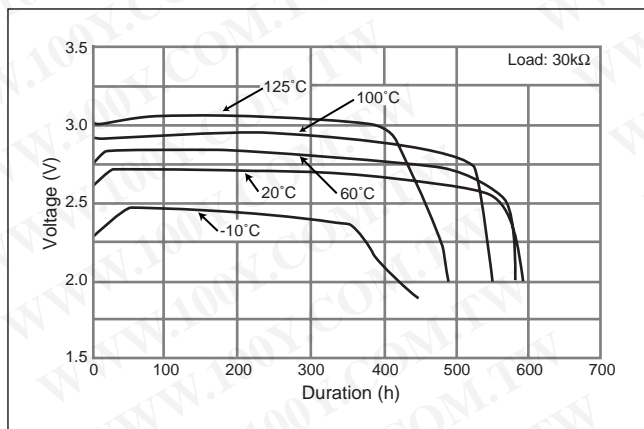

BR1632A

■ Dimensions(mm)




Weight: 1.5g

Note: This bare cell diagram is for size reference only. Please refer to the tab configurations at the end of this section for available tabs.

■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	120
Continuous standard load (mA)	0.03
Operating temperature (C)	-40 ~ +125

■ Temperature Characteristics

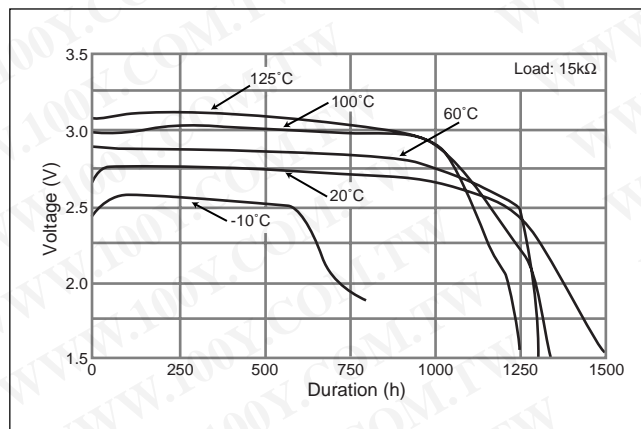

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)